


## Storage tanks / domestic water heating

1.4.2026




**Calorifiers**  
Enamelled




**Hoval CombiVal ER**

**200-1000 l**



**Hoval CombiVal ESR**

**200-400 l**




**Hoval CombiVal ESSR**

**500-1000 l**


**Coil:**

 standard

 large


 specially large

Calorifier charging systems




Hoval charging module TransTherm® aqua L	50-275 kW
Hoval charging module TransTherm® aqua L-FW	50-275 kW
Hoval charging tank CombiVal E	300-2000 l
Hoval charging tank CombiVal C	200-2500 l


Fresh water modules




Hoval fresh water module TransTherm® aqua F	50-275 kW
--	-----------



Hoval fresh water module TransTherm® aqua F	350-700 kW
--	------------




Hoval fresh water module TransTherm® aqua FS	50-717 kW
---	-----------




Hoval fresh water module TransTherm® aqua FT TransTherm® aqua FTC	
---	--

Buffer storage tanks



Hoval EnerVal	100-2000 l
---------------	------------




Hoval EnerVal G	800-6000 l
-----------------	------------



Hoval EnerVal G cool	800-6000 l
----------------------	------------

Combination storage tank



Hoval DuoVal E/C

Electric heating elements



Hoval electric heating elements



Hoval photovoltaic electric heating elements with RemoteControl



Engineering

## Hoval CombiVal ER

Calorifier for combined heating  
CombiVal ER (200-1000)





**Table of contents**

■ Description	5
■ Part numbers	6
■ Technical data	8
■ Dimensions	17



**Hoval calorifier**  
**CombiVal ER (200-500)**

- Calorifier made of steel enamelled inside
- Plain-tube coil enamelled, permanently installed
- Magnesium protection anode built in
- Flange for electric heating element
- Thermal insulation made of polyurethane hard foam foamed on the calorifier
- Dismantable foil jacket, colour red, ERW (200) colour white
- Including thermometer
- Sensor channel

*On request*

- Flange-mounted electric heating element

*Delivery*

- Calorifier with foil jacket completely installed

**Hoval calorifier**  
**CombiVal ER (800,1000)**

- Calorifier made of steel, enamelled inside
- Plain-tube coil enamelled, permanently installed
- 2 magnesium protection anodes built in
- Flange below as cleaning flange or for the installation as flange-mounted electric heating element or dummy flange with immersion sleeve
- Flange above as additional cleaning flange
- Flange for electric heating element or immersion sleeve
- Thermal insulation made of polyester fleece with foil jacket, colour red
- With thermometer
- Two terminal bars for contact sensor

*On request*

- Flange-mounted electric heating element
- Flange including immersion sleeve

*Delivery*

- Calorifier and thermal insulation completely installed (can be removed for installation)



**Range**

CombiVal  
type

ER	(200)	<b>B</b>
ERW	(200)	<b>B</b>
ER	(300)	<b>B</b>
ER	(400)	<b>B</b>
ER	(500)	<b>B</b>
ER	(800)	
ER	(1000)	

A\* → F

Calorifier



**CombiVal ER (200-1000)**

Calorifier made of steel enamelled inside.  
With built-in, enamelled plain-tube coil.

CombiVal ER type	Content l	Heating surface m <sup>2</sup>
(200)	196	0.90
(200) ERW (white)	196	0.95
(300)	302	1.45
(400)	382	1.80
(500)	473	1.90
(800)	735	3.70
(1000)	968	4.50


**Energy efficiency class**  
see "Description"

**Electric heating elements**  
see chapter "Electric heating elements"

Part No.

7015 960  
7015 961  
7015 962  
7015 963  
7015 964  
7014 422  
7014 423

Accessories



**Flange cover 180 – 3/4"**  
for the installation of the Correx® impressed current anode in flange Ø 180/110 mm, enamelled on the inside with Rp 3/4" sleeve  
Seal included

2077 035



**Flange with immersion sleeve**  
for temperature sensor made of steel.  
On domestic water side, enamelled inside.  
Flange dimensions:  
- Outer Ø 180 mm,  
- Pitch circle Ø 150 mm, 8 x M10  
Immersion sleeve dimensions:  
- Installation length = 120 mm,  
- Outer Ø: 24 mm, inner Ø: 20 mm

6028 468



**Kit Correx® impressed current anode UP2.3-919-L395/1**  
for long-term corrosion protection for installation in the enamelled calorifier with reduction R 1 1/4" (ET) - Rp 1" (IT) and R 1" (ET) - Rp 3/4" (IT)  
Installation length: 395 mm  
Connection cable length: 1 x 2000 mm  
1 Correx® impressed current anode

684 760

In every case, either a Correx® impressed current anode or one/two magnesium protection anodes are allowed to be used.

Part No.



**Immersion sensor TF/2P/5/6T,  
L = 5.0 m with plug**  
for TopTronic® E controller modules/  
module expansions with exception of  
basic module district heating/fresh  
water or basic module district heating com,  
cable length: 5 m with plug  
sensor sleeve diameter: 6 x 50 mm,  
dewpoint-proof,  
operating temperature: -20 ... 105 °C,  
protection class: IP67

2056 788



**Immersion sensor TF/2P/5/6T, L = 5.0 m**  
for TopTronic® E controller modules/  
module expansions with exception of  
basic module district heating/fresh  
water or basic module district  
heating com,  
cable length: 5 m without plug  
sensor sleeve diameter: 6 x 50 mm,  
dewpoint-proof,  
operating temperature: -20 ... 105 °C,  
protection class: IP67

2055 888



**Immersion sensor TF/12N/2.5/6T,  
L = 2.5 m**  
for gas boiler with RS-OT  
Cable length: 2.5 m  
Sensor sleeve diameter: 6 x 50 mm,  
dewpoint-proof,  
operating temperature: -20 ... 105 °C,  
protection class: IP67

2056 791

**At TopTronic® E, immersion sensor is  
included in the boiler controller or in the  
heating controller set.**



**Calorifier thermostat control  
TW 12**  
Universal thermostat controller  
for thermostatic pump charge  
demand, setting in  
casing, visible from outside.  
15 ... 95 °C, switching difference 6 K,  
capillar length 700 mm  
incl. fastening material for  
Hoval calorifier, can be used with  
integrated immersion sleeve

6010 080

**Thermal water mixer**  
see "Various system components"

Services



**Services and associated scope of  
services**  
see separate catalogue "Hoval Services"

Commissioning by Hoval customer service  
is a prerequisite for warranty/guarantee  
activation.

**CombiVal ER (200-500)**

Type		(200)	(300)	(400)	(500)
• Volume	l	196	302	382	473
• Max. operating/test pressure SVGW	bar	6/12	6/12	6/12	6/12
• Max. operating/test pressure DVGW	bar	10/13	10/13	10/13	10/13
• Max. operating temperature	°C	95	95	95	95
• Thermal insulation PU-foam foamed onto calorifier	mm	75	50	75	75
• Thermal insulation λ	W/mK	0.027	0.027	0.027	0.027
• Fire protection class		B2	B2	B2	B2
• Heat loss at 65 °C	W	49	67	65	76
• Transport weight	kg	77	104	134	146
• U value	W/m²K	0.328	0.404	0.307	0.308
<b>Heating battery (built in)</b>					
• Heating surface	m²	0.90	1.45	1.80	1.90
• Heating water	l	6.4	9.9	12.2	12.8
• Flow resistance <sup>1)</sup>	z value	7	10	12	13
• Max. operating/test pressure SVGW	bar	8/13	8/13	8/13	8/13
• Max. operating/test pressure DVGW	bar	10/13	10/13	10/13	10/13
• Max. operating temperature	°C	110	110	110	110
• Dimensions		see table of dimensions			

<sup>1)</sup> Flow resistance heating battery in mbar = flow rate (m³/h)² x z (1 mbar = 0.1 kPa)

**CombiVal ER (800,1000)**

Type		(800)	(1000)
• Volume	l	735	968
• Max. operating/test pressure SVGW	bar	6/12	6/12
• Max. operating/test pressure DVGW	bar	10/13	10/13
• Max. operating temperature	°C	95	95
• Thermal insulation made of polyester fleece	mm	100	100
• Thermal insulation λ	W/mK	0.040	0.040
• Fire protection class		B2	B2
• Heat loss at 65 °C	W	127	142
• Transport weight	kg	251	324
• U value	W/m²K	0.376	0.37
<b>Heating battery (built in)</b>			
• Heating surface	m²	3.7	4.5
• Heating water	l	34.2	40.6
• Flow resistance <sup>1)</sup>	z value	6	8
• Max. operating/test pressure SVGW	bar	8/13	8/13
• Max. operating/test pressure DVGW	bar	10/13	10/13
• Max. operating temperature	°C	110	110
• Dimensions		see table of dimensions	

<sup>1)</sup> Flow resistance heating battery in mbar = flow rate (m³/h)² x z (1 mbar = 0.1 kPa)

**Performance figure**

Selection of the calorifier type  
at a hot water temperature of 45 °C

**Reading example**  
see engineering

	Comfort <sup>1)</sup>			Standard <sup>2)</sup>		
	60 °C	70 °C	80 °C	60 °C	70 °C	80 °C
T >						
NL v						
1	200			200		
2	300	200		300	200	
3			200			200
4	400			400		
5	500	300		500	300	
6			300			300
7						
8						
9	800	400				
10	1000	500		800	400	
11			400	1000	500	
12			500			
13						400
14						500
15						
16						
17						
18						
19						
20						
21						
22		800				
23						
24						
25						
26		1000				
27						
28				800		
29						
30			800			
31						
32						
33				1000		
34						
35			1000			
36						
37						
38						800
39						
40						
41						
42						
43						
44						
45						1000
46						
47						
48						
49						
50						

	Comfort <sup>1)</sup>			Standard <sup>2)</sup>		
	60 °C	70 °C	80 °C	60 °C	70 °C	80 °C
T >						
NL v						
51						
52						
53						
54						
55						
56						
57						
58						
59						
60						
61						
62						
63						
64						
65						
66						
67						
68						
69						
70						
71						
72						
73						
74						
75						
76						
77						
78						
79						
80						
81						
82						
83						
84						
85						
86						
87						
88						
89						
90						
91						
92						
93						
94						
95						
96						
97						
98						
99						
100						

T = Heating flow

NL = Performance figure


Performance figure NL acc. to DIN 4708 = number of flats which can be supplied with domestic hot water when the calorifier is heated and permanently reheated with the heat generator (standard flat: 1 bathroom – 4 rooms – 3.5 persons)

<sup>1)</sup> Calculation with simultaneity factor according to DIN 4708 (preferred for Switzerland)

<sup>2)</sup> Calculation with simultaneity factor according to Dresden Technical University

**10 min peak output/N number with domestic hot water 45 °C**  
 according to DIN 4708 (Comfort) and Dresden Technical University (Standard)


**Reading example**  
 see Engineering

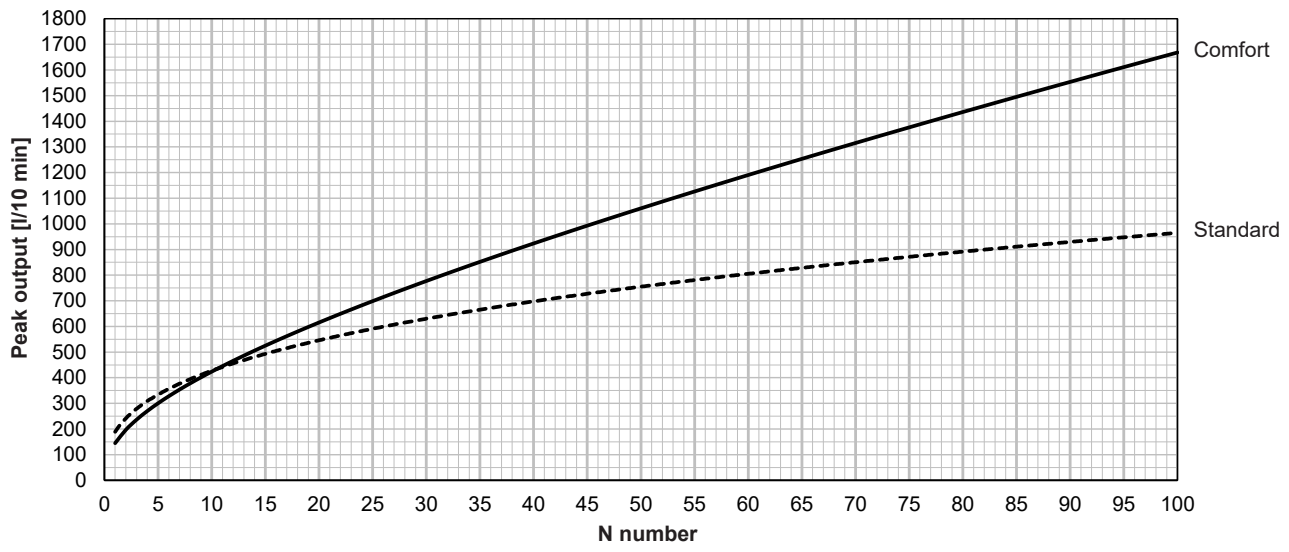



CombiVal ER (200)

Hot water output  
Continuous output



Reading example  
see engineering

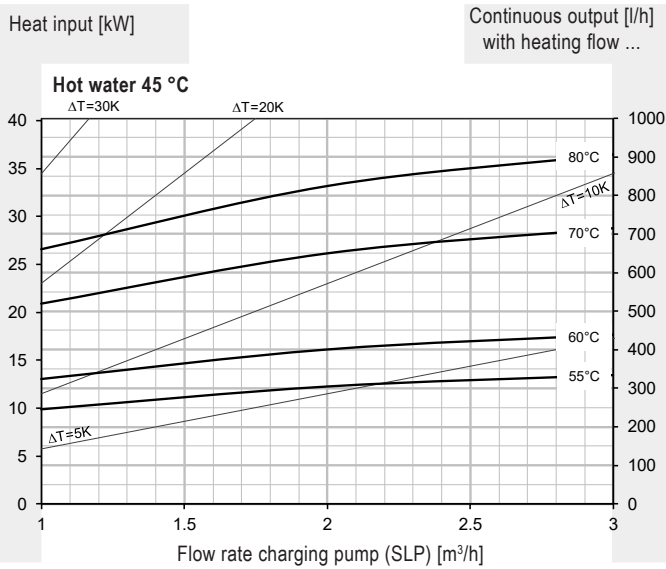

10 min peak output – hot water 45 °C \*

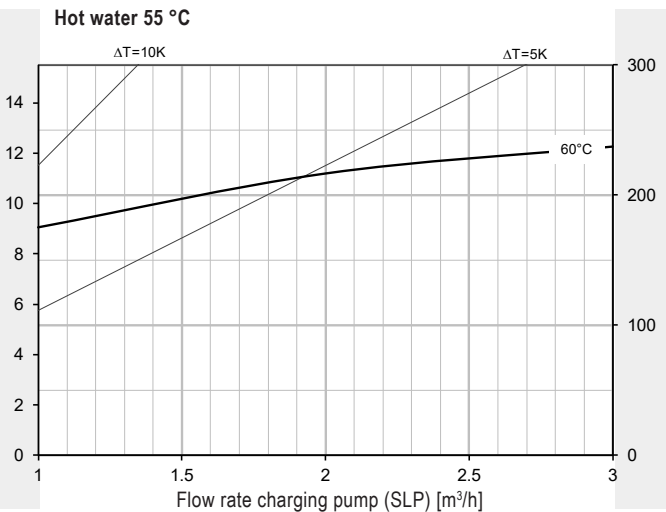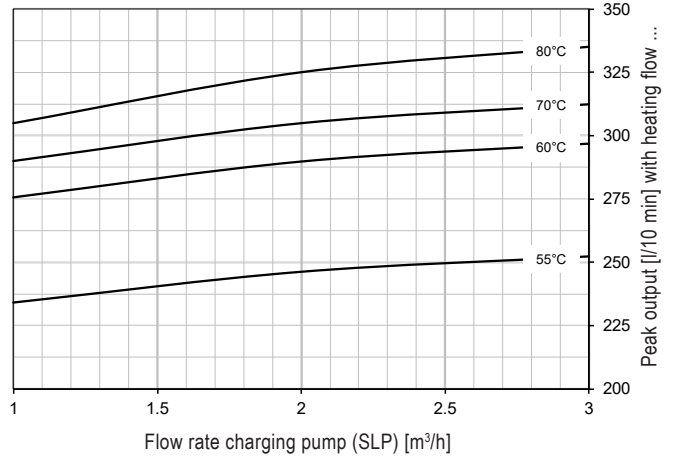

Pressure drop heating coil – delivery head charging pump

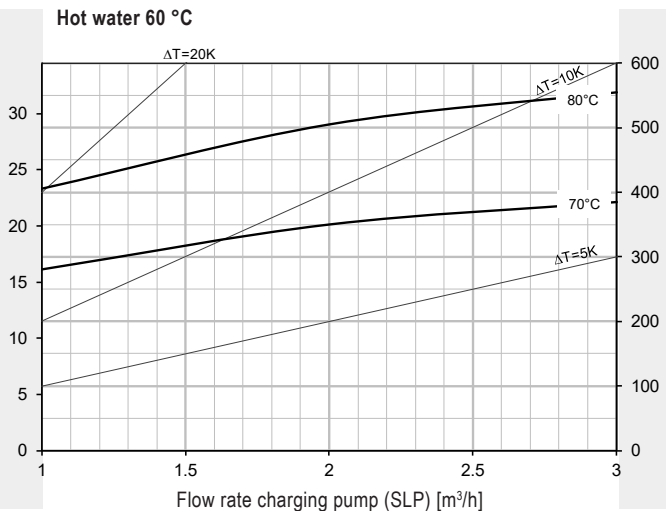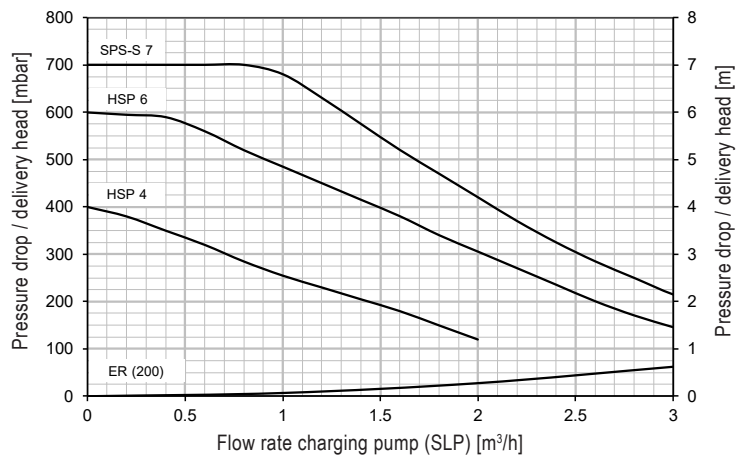


\* Calorifier heated to 60 °C



CombiVal ER (300)

Hot water output  
Continuous output



Reading example  
see engineering

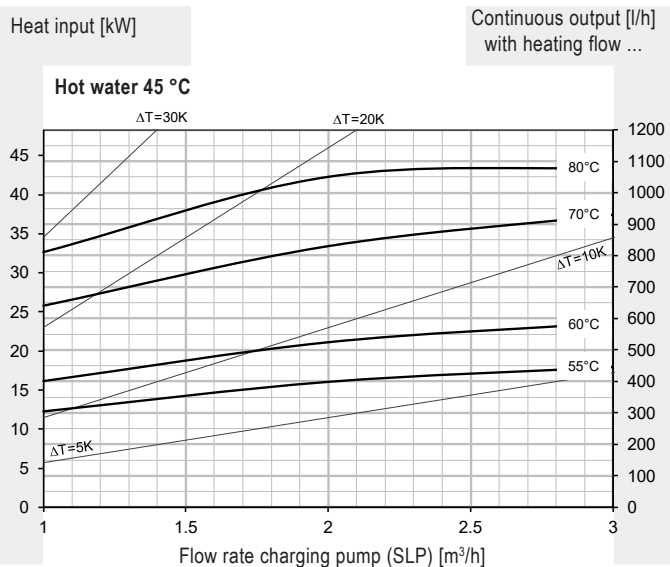

10 min peak output – hot water 45 °C \*

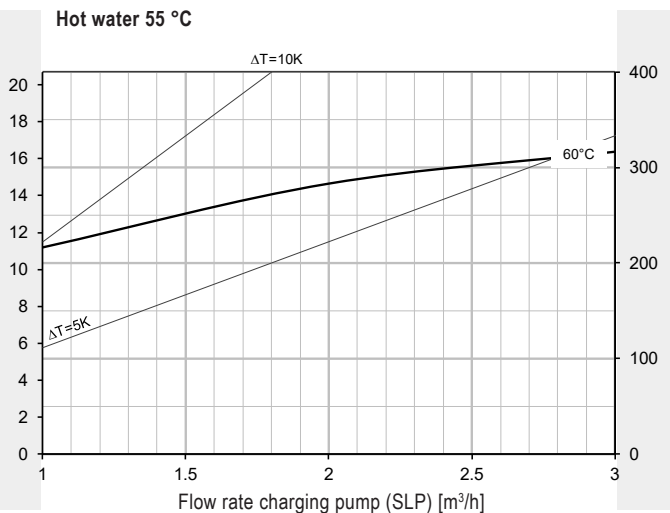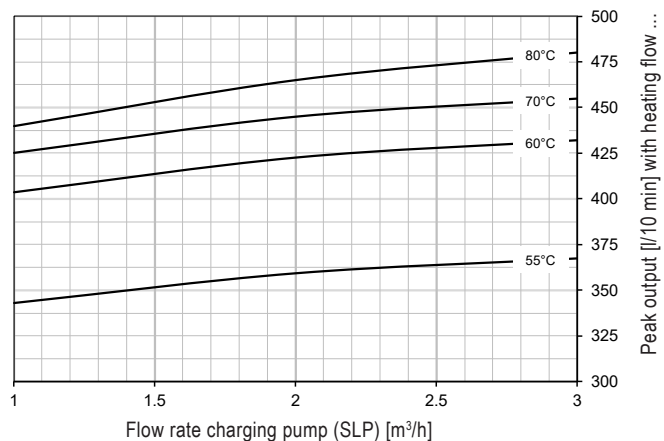

Pressure drop heating coil – delivery head charging pump




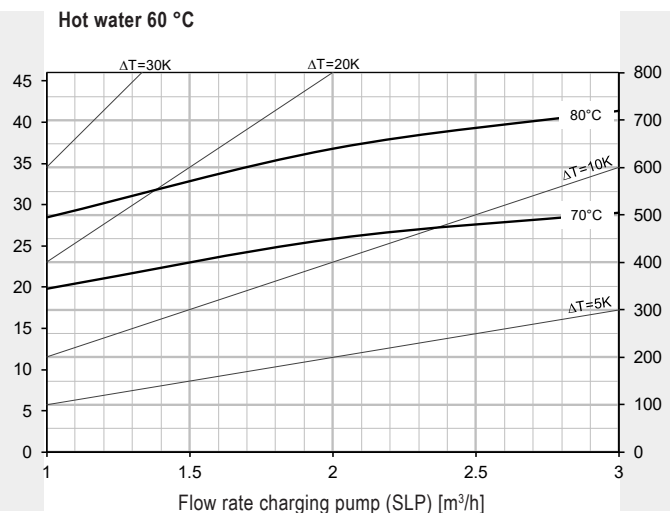
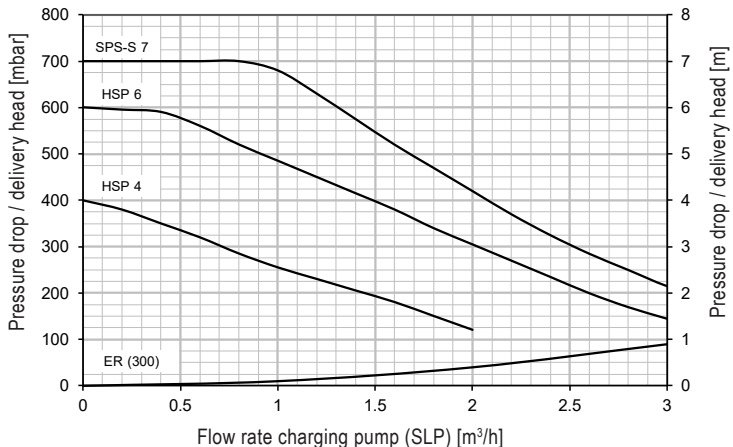


\* Calorifier heated to 60 °C

CombiVal ER (400)

Hot water output  
Continuous output

Reading example  
see engineering

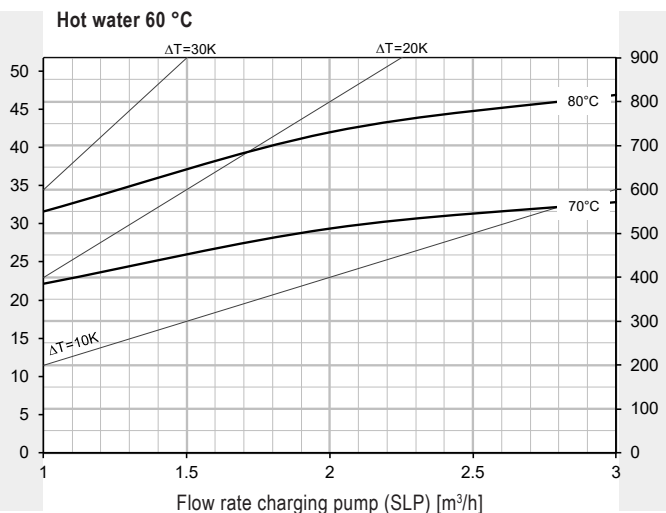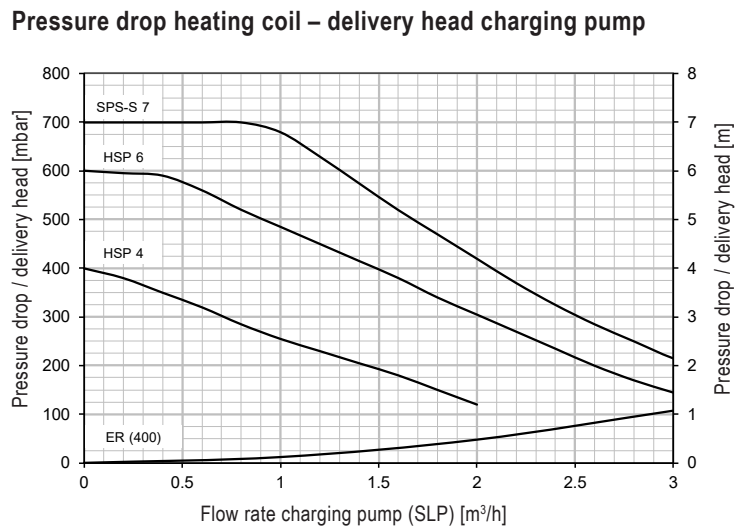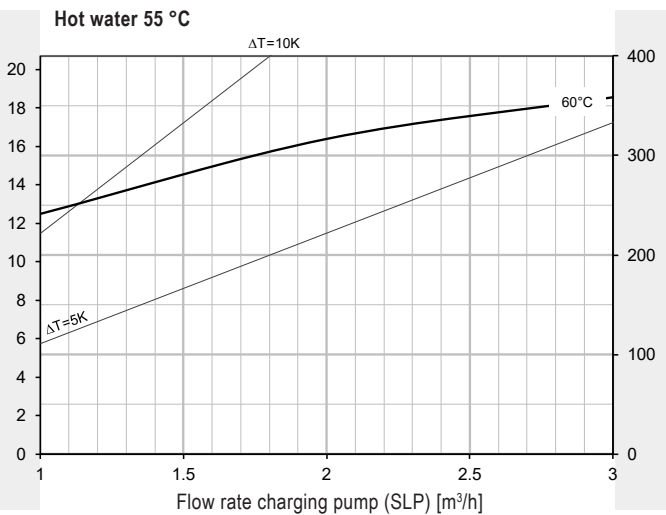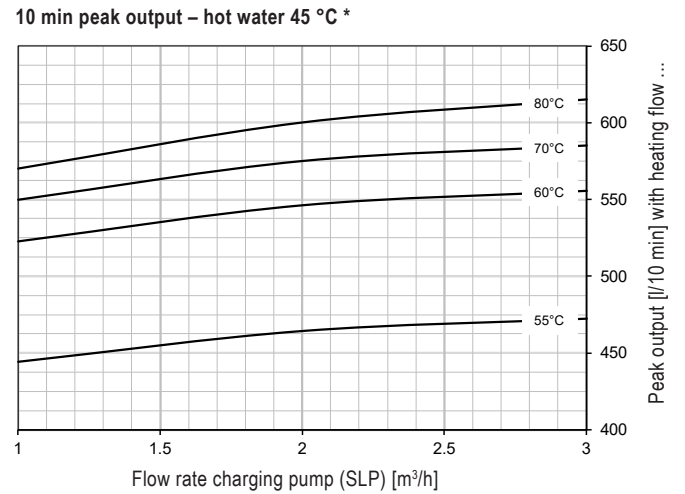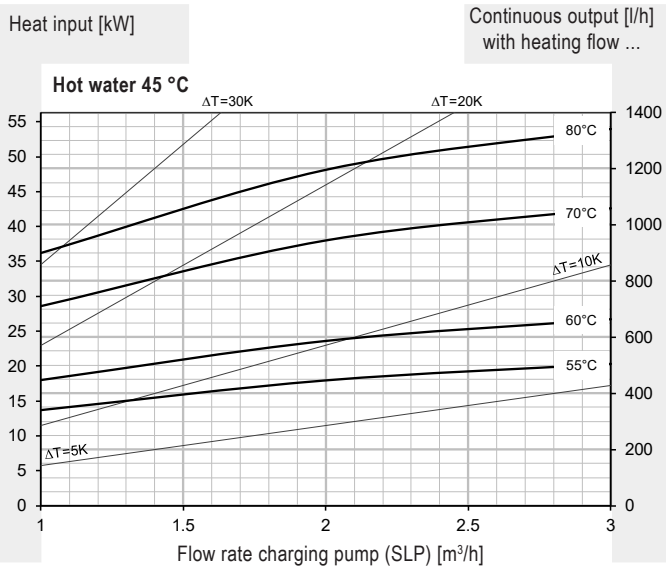


\* Calorifier heated to 60 °C



CombiVal ER (500)

Hot water output  
Continuous output



Reading example  
see engineering

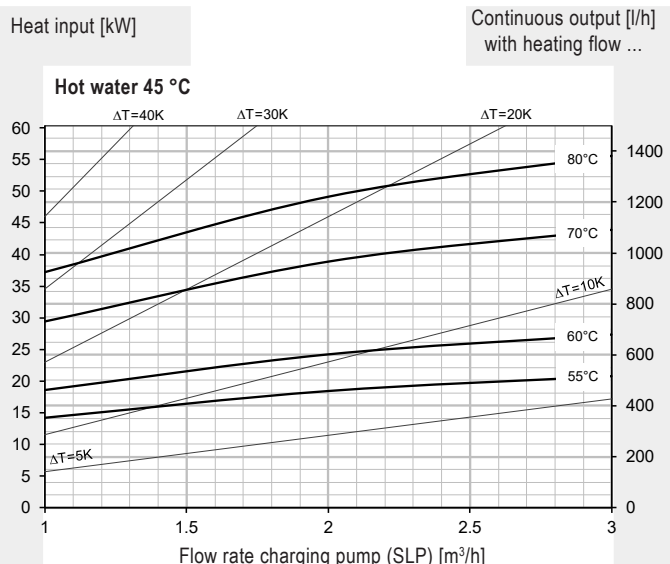

10 min peak output – hot water 45 °C \*

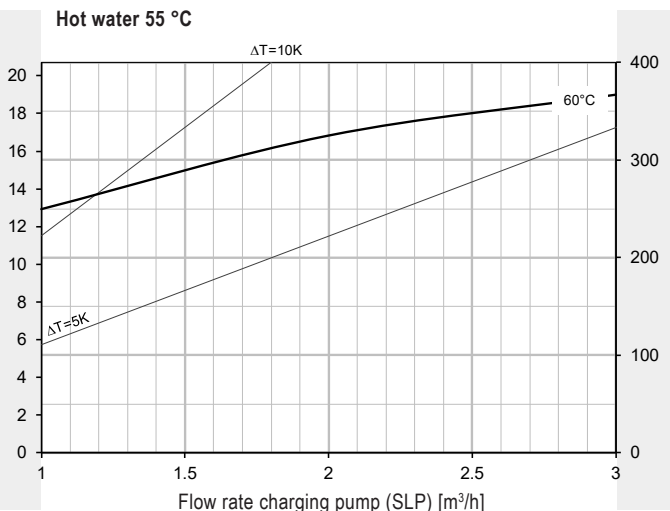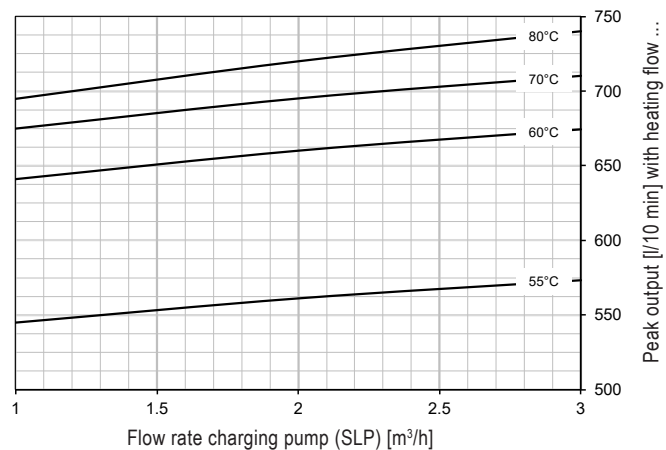

Pressure drop heating coil – delivery head charging pump

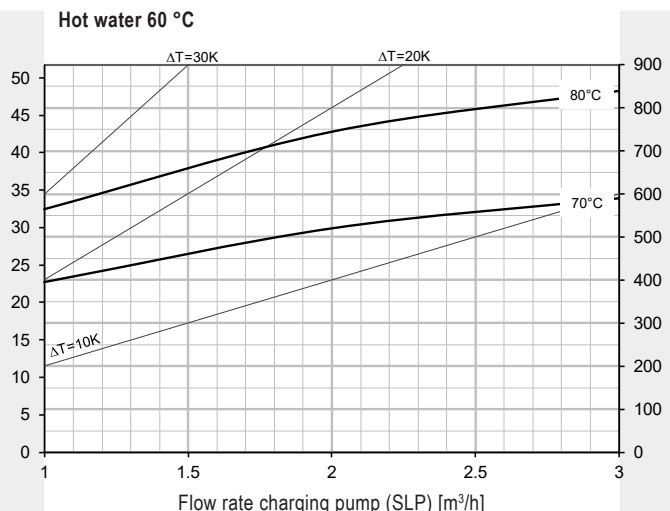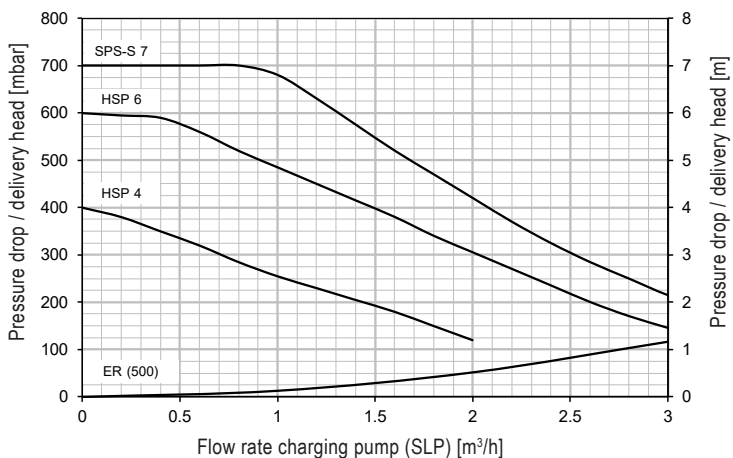


\* Calorifier heated to 60 °C



CombiVal ER (800)

Hot water output  
Continuous output



Reading example  
see engineering

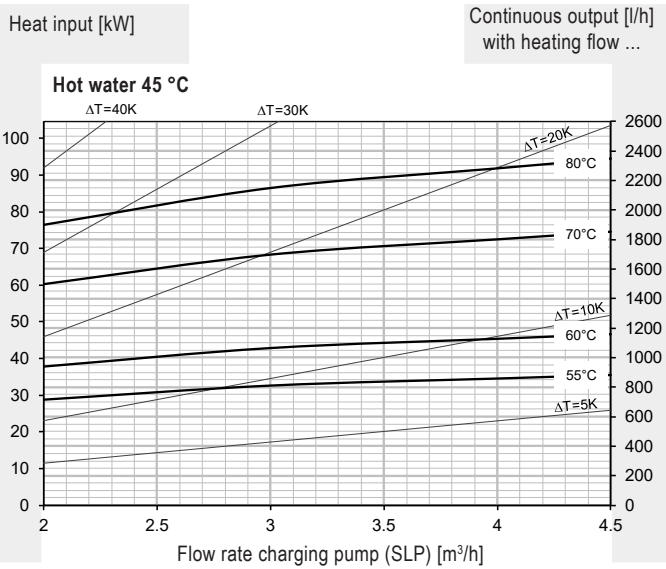

10 min peak output – hot water 45 °C \*

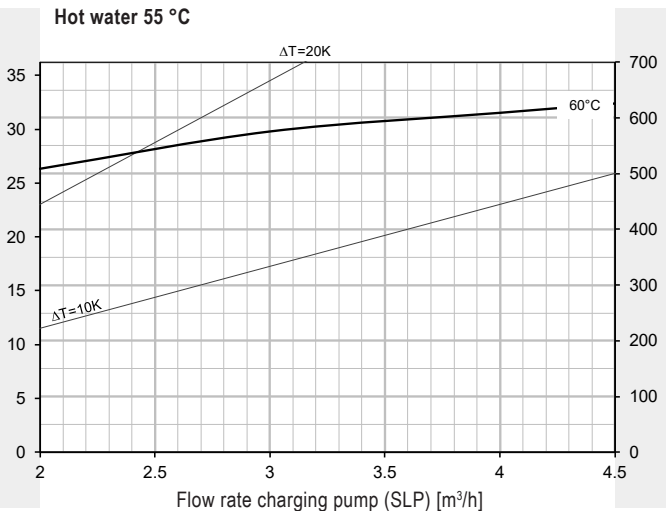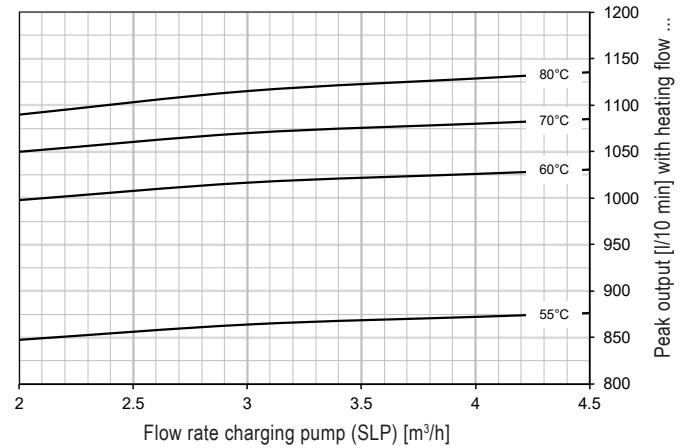

Pressure drop heating coil – delivery head charging pump




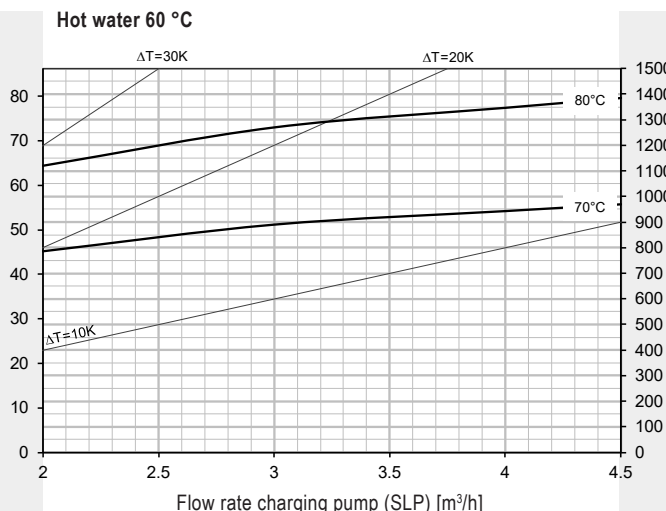
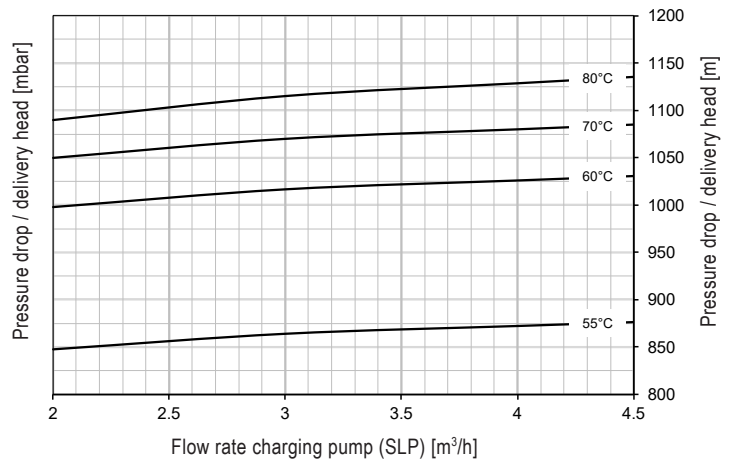


\* Calorifier heated to 60 °C

CombiVal ER (1000)



Hot water output  
Continuous output

Reading example  
see engineering

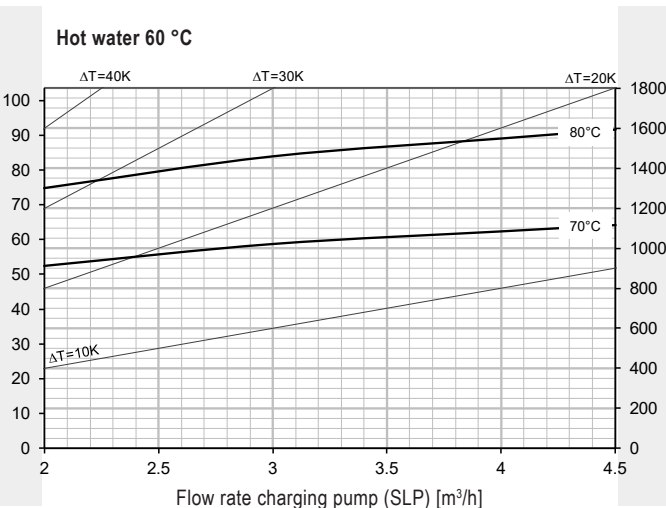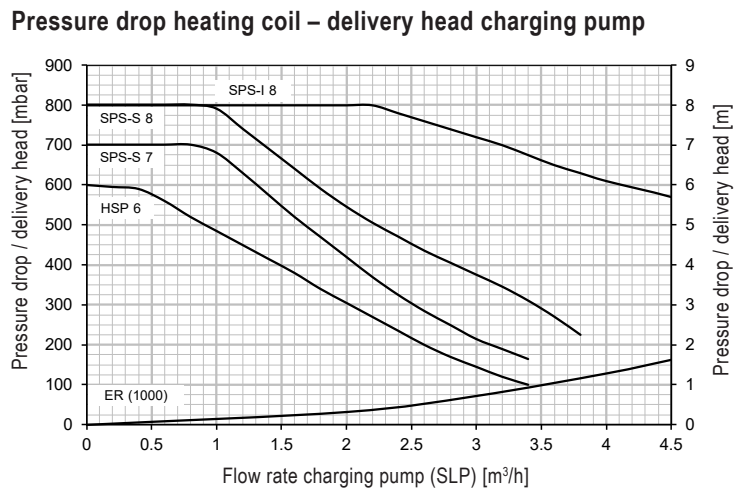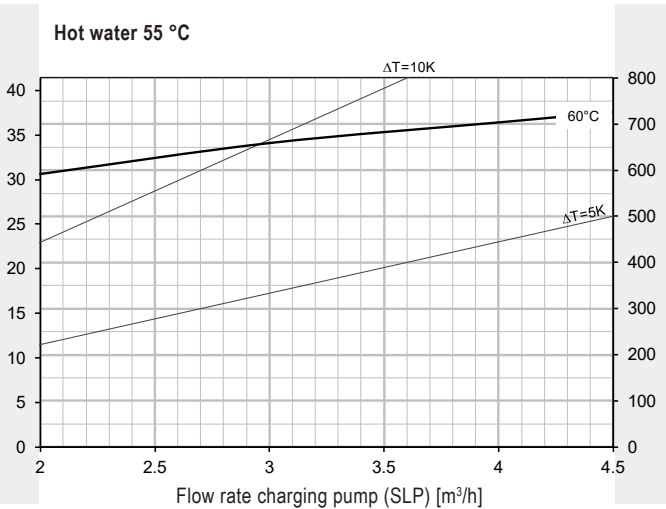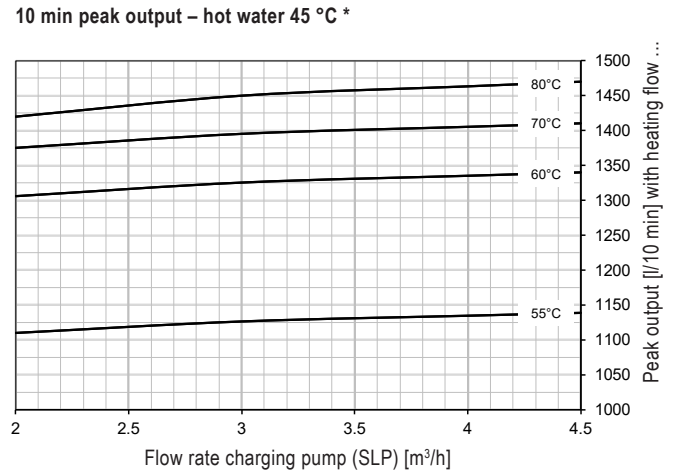
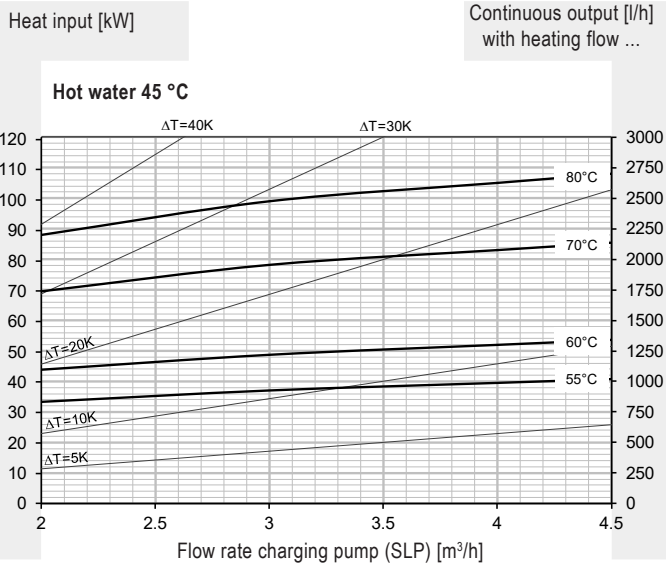


\* Calorifier heated to 60 °C

**CombiVal ER (200-500)**  
(Dimensions in mm)

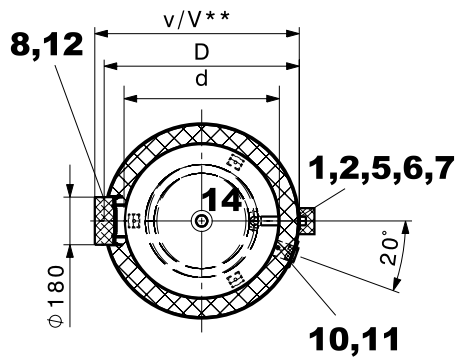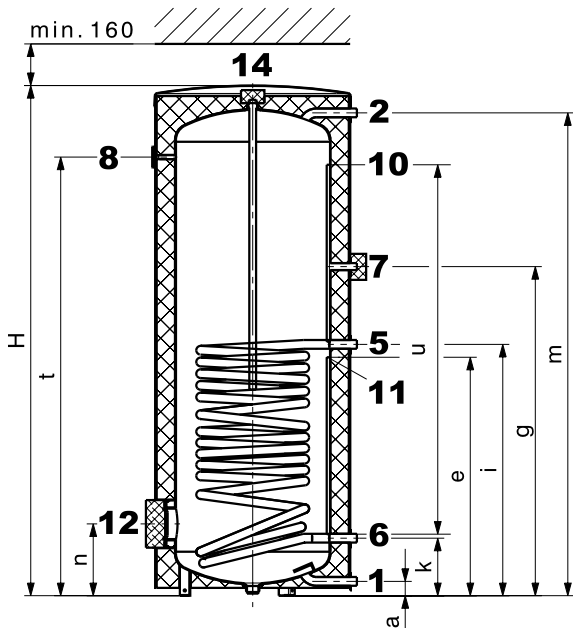

**CombiVal ER (800,1000)**

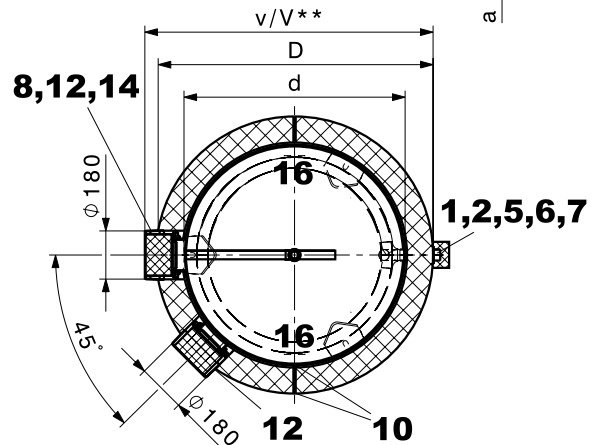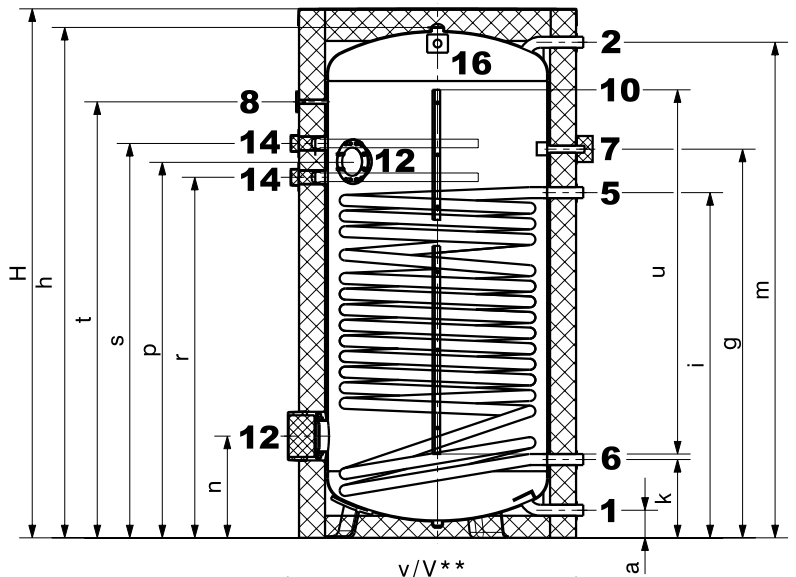

- 1 Cold water  
type (200) G 3/4" (ET)  
type (300-500) G 1" (ET)  
type (800,1000) G 1 1/4" (ET)
- 2 Domestic hot water  
type (200) G 3/4" (ET)  
type (300-500) G 1" (ET)  
type (800,1000) G 1 1/4" (ET)
- 5 Heating flow  
type (200-500) G 1" (ET)  
type (800,1000) G 1 1/4" (ET)
- 6 Heating return  
type (200-500) G 1" (ET)  
type (800,1000) G 1 1/4" (ET)
- 7 Circulation  
(removable insulated cap Ø 100 mm)  
G 3/4" (ET)
- 8 Thermometer

- 10 Sensor channel, inner Ø 11 mm  
Sensor terminal strip (zip fastener)  
type (200-500)
- 11 Removable cap (Ø 60 mm)  
for positioning the sensor in the sensor channel  
type (800,1000)
- 12 Hand-hole flange (flange-mounted electric heating element) Ø 180/120 mm, hole circle 150 mm, 8 x M10  
(Mounting of a flange-mounted electric heating element:  
- bottom, possible.  
- top, not possible.)  
type (200-500) Rp 1" (IT)
- 14 Anode sleeve  
type (800,1000) Rp 1 1/4" (IT)
- 16 Transport strap  
type (800,1000)

Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm

CombiVal ER  
type

type	D	d	H	h	a	e	g	i	k	m	n	p	r	s	t	u	v	v**	Tilting dimension
(200)	600	450	1464	-	55	680	902	689	194	1373	249	-	-	-	1229	1060	635	650	1583
(300)	700	597	1326	-	55	609	921	721	221	1229	276	-	-	-	1069	860	795	810	1524
(400)	750	597	1623	-	55	747	1112	909	221	1526	276	-	-	-	1356	1060	795	810	1788
(500)	750	597	1953	-	55	917	1265	966	221	1856	276	-	-	-	1686	1360	795	810	2093
(800)	950	750	2040	1937	105	-	1422	1319	293	1891	383	1408	1348	1478	1648	1400	975	1020	1962
(1000)	1050	850	2063	1962	106	-	1494	1327	301	1905	391	1446	1386	1516	1676	1400	1075	1120	1991

\*\* When using a flange-mounted electric heating element

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval CombiVal ESR

Calorifier with large coil  
for combined heating  
CombiVal ESR (200-400)





**Table of contents**

■ Description	5
■ Part numbers	6
■ Technical data	8
■ Dimensions	14



## Hoval CombiVal ESR (200-400)

Calorifier with large coil  
for combined heating

Description

Hoval

### Hoval calorifier CombiVal ESR (200-400)

- Calorifier made of steel enamelled inside
- Large plain-tube coil enamelled, permanently installed
- Magnesium protection anode built in
- Flange for electric heating element
- Thermal insulation made of polyurethane hard foam foamed on the calorifier
- Dismantable foil jacket, colour red
- Including thermometer
- Sensor channel

#### *On request*

- Flange-mounted electric heating element

#### *Delivery*

- Calorifier with foil jacket completely installed



#### Range

CombiVal  
type

ESR	(200)	<b>B</b> ▶
ESR	(300)	<b>B</b> ▶
ESR	(400)	<b>B</b> ▶

A\* → F

Calorifier



**CombiVal ESR (200-400)**

Calorifier made of steel, enamelled inside, with permanently installed plain-tube coil.

CombiVal ESR type	Content l	Heating surface m <sup>2</sup>
(200)	193	1.8
(300)	298	2.6
(400)	379	3.8

**Authorisation number**

CombiVal ESR (200-400)  
SVGW test number

0503-4950

**Energy efficiency class**

see "Description"


**Electric heating elements**

see chapter "Electric heating elements"

Part No.

7015 965  
7015 966  
7015 967

Accessories



**Flange cover 180 – 3/4"**

for the installation of the Correx<sup>®</sup> impressed current anode in flange Ø 180/110 mm, enamelled on the inside with Rp 3/4" sleeve  
Seal included

2077 035



**Flange with immersion sleeve**

for temperature sensor made of steel. On domestic water side, enamelled inside.

- Flange dimensions:
- Outer Ø 180 mm,
  - Pitch circle Ø 150 mm, 8 x M10
- Immersion sleeve dimensions:
- Installation length = 120 mm,
  - Outer Ø: 24 mm, inner Ø: 20 mm

6028 468



**Kit Correx<sup>®</sup> impressed current anode UP2.3-919-L395/1**

for long-term corrosion protection for installation in the enamelled calorifier with reduction R 1 1/4" (ET) - Rp 1" (IT) and R 1" (ET) - Rp 3/4" (IT)  
Installation length: 395 mm  
Connection cable length: 1 x 2000 mm  
1 Correx<sup>®</sup> impressed current anode

684 760

In every case, either a Correx<sup>®</sup> impressed current anode or one/two magnesium protection anodes are allowed to be used.

Part No.



**Immersion sensor TF/2P/5/6T,  
L = 5.0 m with plug**  
for TopTronic® E controller modules/  
module expansions with exception of  
basic module district heating/fresh  
water or basic module district heating com,  
cable length: 5 m with plug  
sensor sleeve diameter: 6 x 50 mm,  
dewpoint-proof,  
operating temperature: -20 ... 105 °C,  
protection class: IP67

2056 788



**Immersion sensor TF/2P/5/6T, L = 5.0 m**  
for TopTronic® E controller modules/  
module expansions with exception of  
basic module district heating/fresh  
water or basic module district  
heating com,  
cable length: 5 m without plug  
sensor sleeve diameter: 6 x 50 mm,  
dewpoint-proof,  
operating temperature: -20 ... 105 °C,  
protection class: IP67

2055 888



**Immersion sensor TF/12N/2.5/6T,  
L = 2.5 m**  
for gas boiler with RS-OT  
Cable length: 2.5 m  
Sensor sleeve diameter: 6 x 50 mm,  
dewpoint-proof,  
operating temperature: -20 ... 105 °C,  
protection class: IP67

2056 791

**At TopTronic® E, immersion sensor is  
included in the boiler controller or in the  
heating controller set.**



**Calorifier thermostat control  
TW 12**  
Universal thermostat controller  
for thermostatic pump charge  
demand, setting in  
casing, visible from outside.  
15 ... 95 °C, switching difference 6 K,  
capillar length 700 mm  
incl. fastening material for  
Hoval calorifier, can be used with  
integrated immersion sleeve

6010 080

**Thermal water mixer**  
see "Various system components"

Services



**Services and associated scope of  
services**  
see separate catalogue "Hoval Services"

Commissioning by Hoval customer service  
is a prerequisite for warranty/guarantee  
activation.

**CombiVal ESR (200-400)**

Type		(200)	(300)	(400)
• Volume	l	193	298	379
• Max. operating/test pressure SVGW	bar	6/12	6/12	6/12
• Max. operating/test pressure DVGW	bar	10/13	10/13	10/13
• Max. operating temperature	°C	95	95	95
• Thermal insulation PU-foam, foamed onto calorifier	mm	75	50	75
• Thermal insulation $\lambda$	W/mK	0.027	0.027	0.027
• Fire protection class		B2	B2	B2
• Heat loss at 65 °C	W	48	68	68
• Transport weight	kg	91	118	156
• U value	W/m <sup>2</sup> K	0.32	0.41	0.32
<b>Heating battery (built in)</b>				
• Heating surface	m <sup>2</sup>	1.8	2.6	3.8
• Heating water content	l	12.2	16	34
• Flow resistance <sup>1)</sup>	z value	13	17	6
• Max. operating/test pressure SVGW	bar	8/13	8/13	8/13
• Max. operating/test pressure DVGW	bar	10/13	10/13	10/13
• Max. operating temperature	°C	110	110	110
• Dimensions		see table of dimensions		

<sup>1)</sup> Flow resistance heating battery in mbar = flow rate (m<sup>3</sup>/h)<sup>2</sup> x z (1 mbar = 0.1 kPa)

**Performance figure**

Selection of the calorifier type  
at a hot water temperature of 45 °C

**Reading example**  
see engineering

T >	Comfort <sup>1)</sup>			Standard <sup>2)</sup>		
	60 °C	70 °C	80 °C	60 °C	70 °C	80 °C
NL v						
1				200		
2	200					
3						
4	300			300		
5		200			200	
6	400		200	400		200
7						
8						
9		300				
10			300		300	
11						300
12						
13						
14		400				
15						
16						
17					400	
18			400			
19						
20						
21						
22						400
23						
24						
25						
26						
27						
28						
29						
30						
31						
32						
33						
34						
35						
36						
37						
38						
39						
40						
41						
42						
43						
44						
45						
46						
47						
48						
49						
50						

T >	Comfort <sup>1)</sup>			Standard <sup>2)</sup>		
	60 °C	70 °C	80 °C	60 °C	70 °C	80 °C
NL v						
51						
52						
53						
54						
55						
56						
57						
58						
59						
60						
61						
62						
63						
64						
65						
66						
67						
68						
69						
70						
71						
72						
73						
74						
75						
76						
77						
78						
79						
80						
81						
82						
83						
84						
85						
86						
87						
88						
89						
90						
91						
92						
93						
94						
95						
96						
97						
98						
99						
100						

T = heating flow

NL = performance figure


Performance figure NL acc. to DIN 4708 = number of flats which can be supplied with domestic hot water when the calorifier is heated and permanently reheated with the heat generator (standard flat: 1 bathroom – 4 rooms – 3.5 persons)

<sup>1)</sup> Calculation with simultaneity factor according to DIN 4708 (preferred for Switzerland)

<sup>2)</sup> Calculation with simultaneity factor according to Dresden Technical University

10 min peak output/N number with domestic hot water 45 °C  
according to DIN 4708 (Comfort) and Dresden Technical University (Standard)






Reading example  
see Engineering

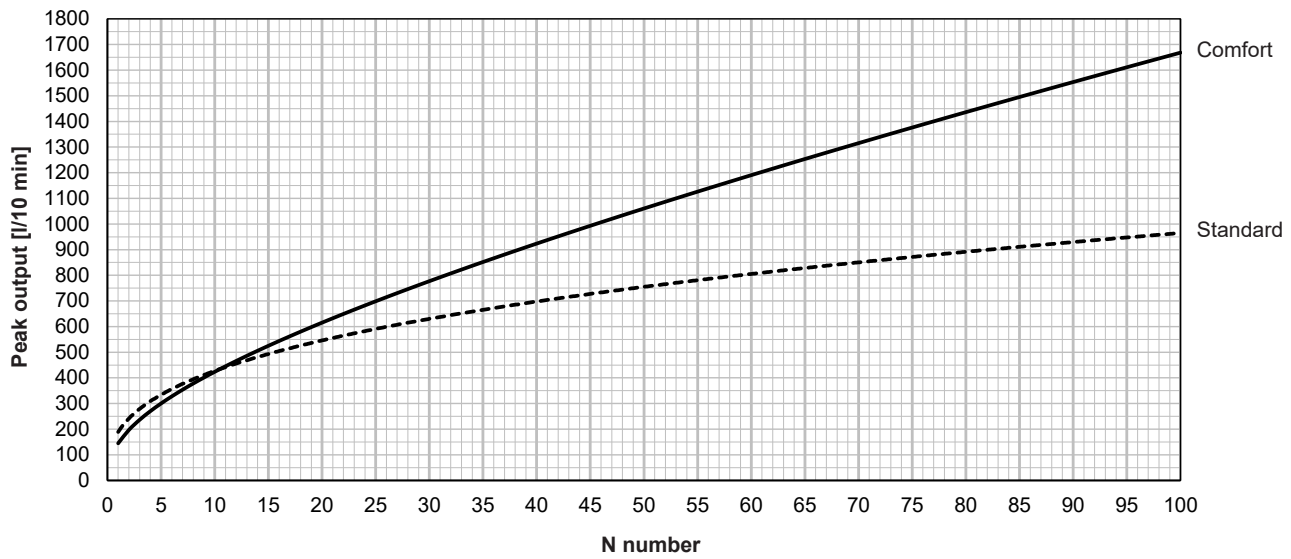

CombiVal ESR (200)

Hot water output  
Continuous output

Reading example  
see engineering

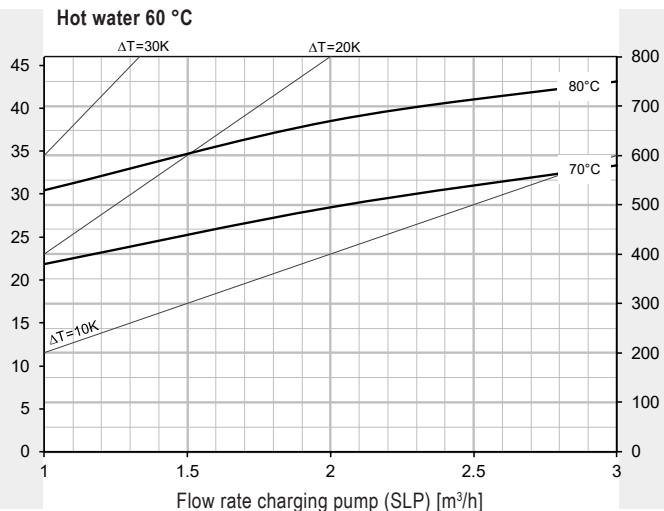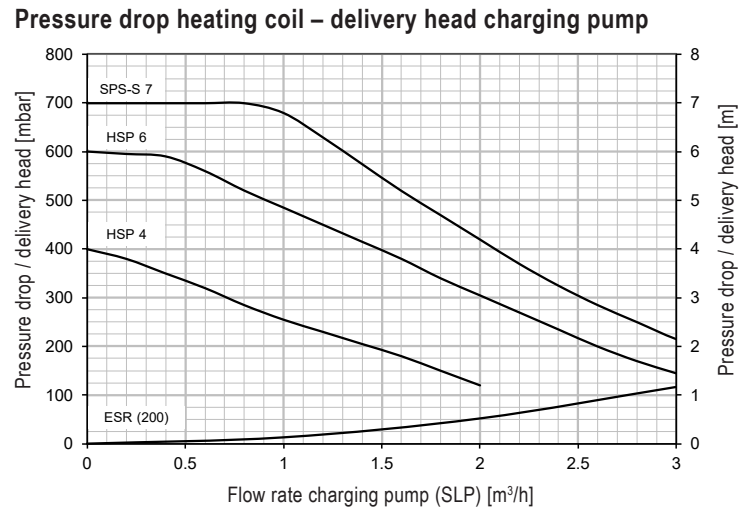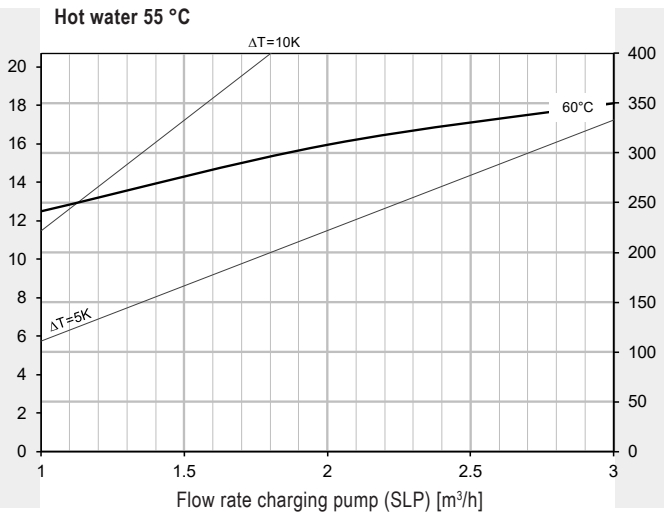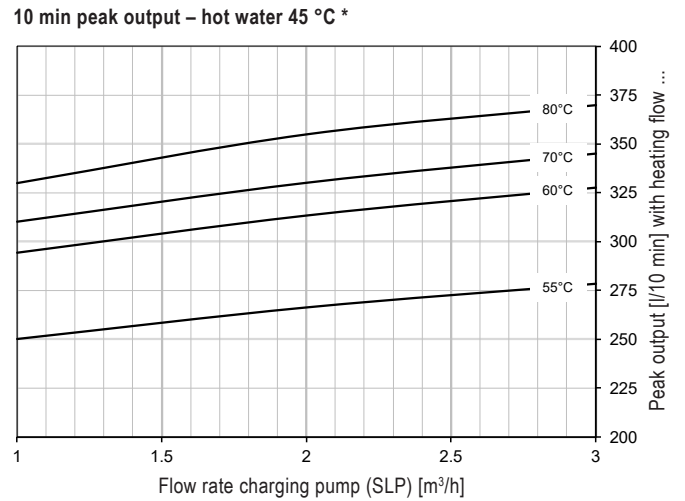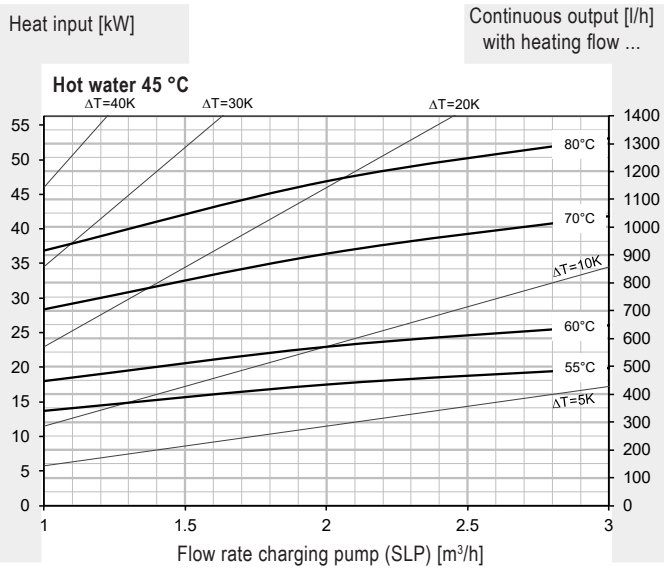


\* Calorifier heated to 60 °C



CombiVal ESR (300)

Hot water output  
Continuous output



Reading example  
see engineering

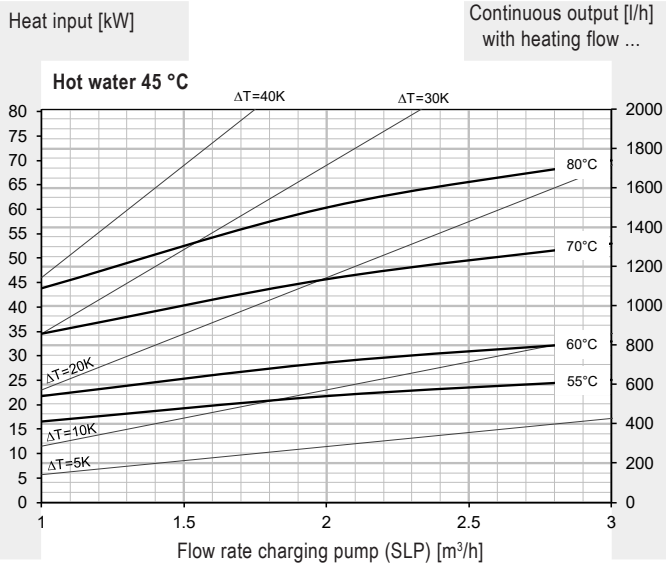

10 min peak output – hot water 45 °C \*

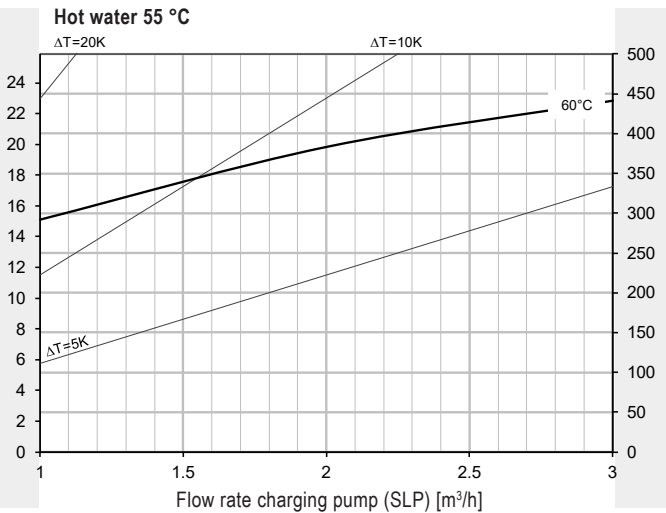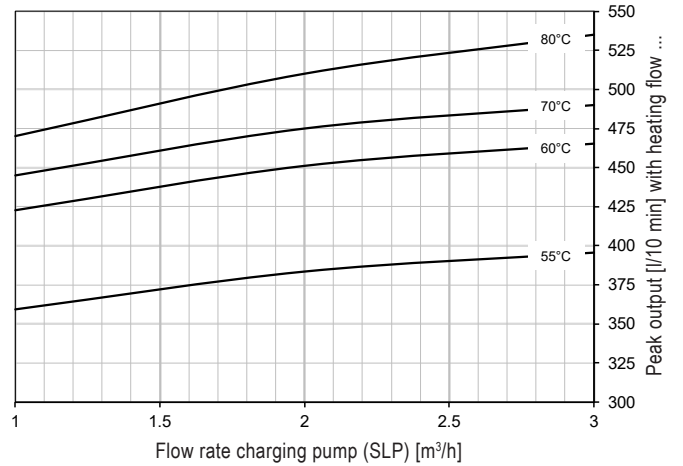

Pressure drop heating coil – delivery head charging pump

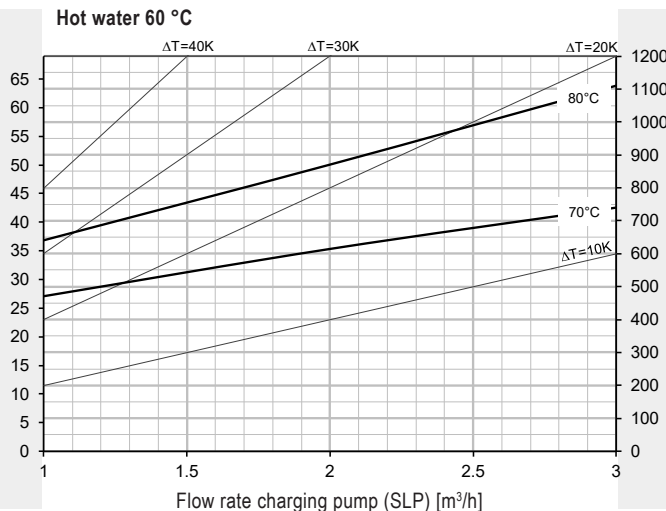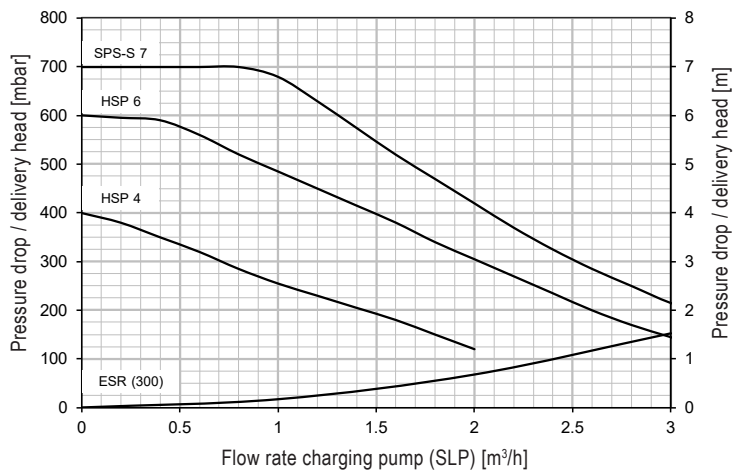


\* Calorifier heated to 60 °C



CombiVal ESR (400)

Hot water output  
Continuous output



Reading example  
see engineering

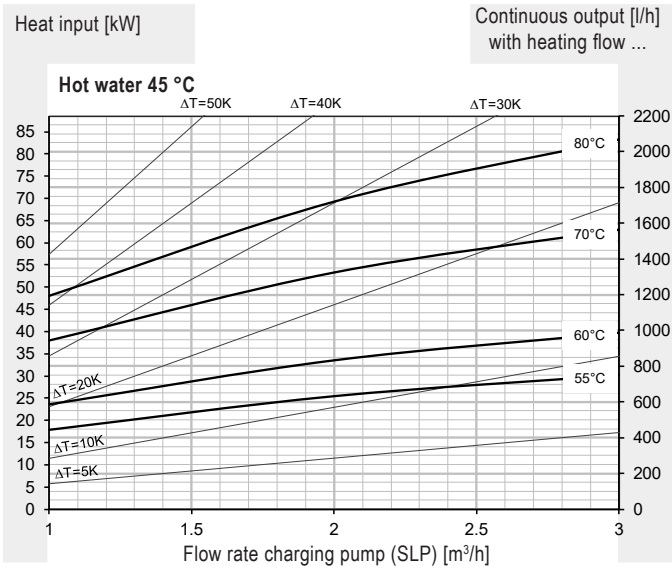

10 min peak output – hot water 45 °C \*

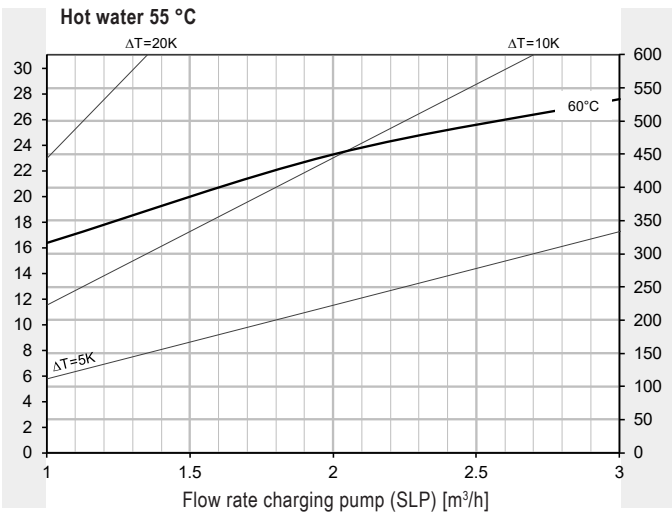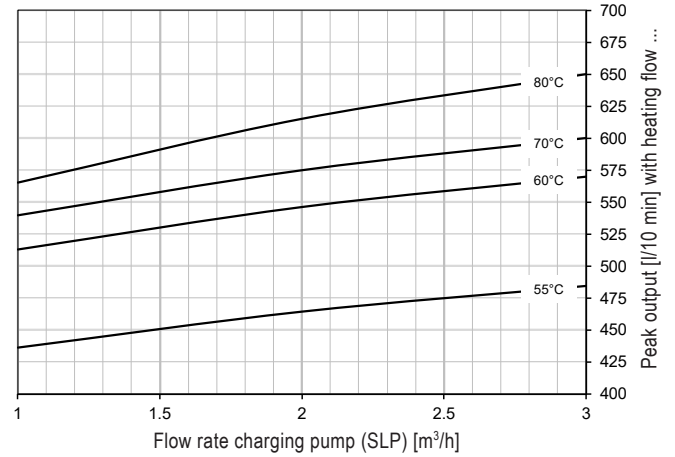


Pressure drop heating coil – delivery head charging pump

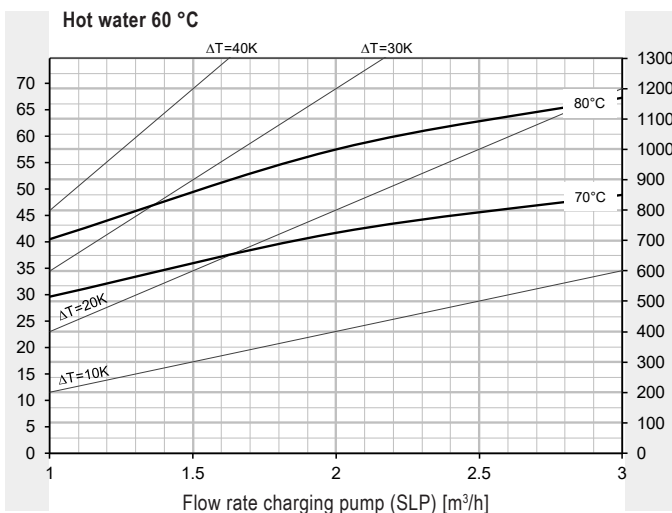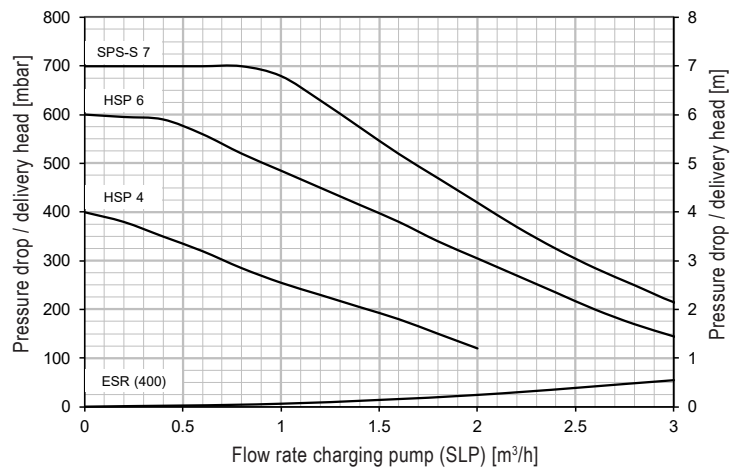

\* Calorifier heated to 60 °C

**CombiVal ESR (200-400)**  
(Dimensions in mm)

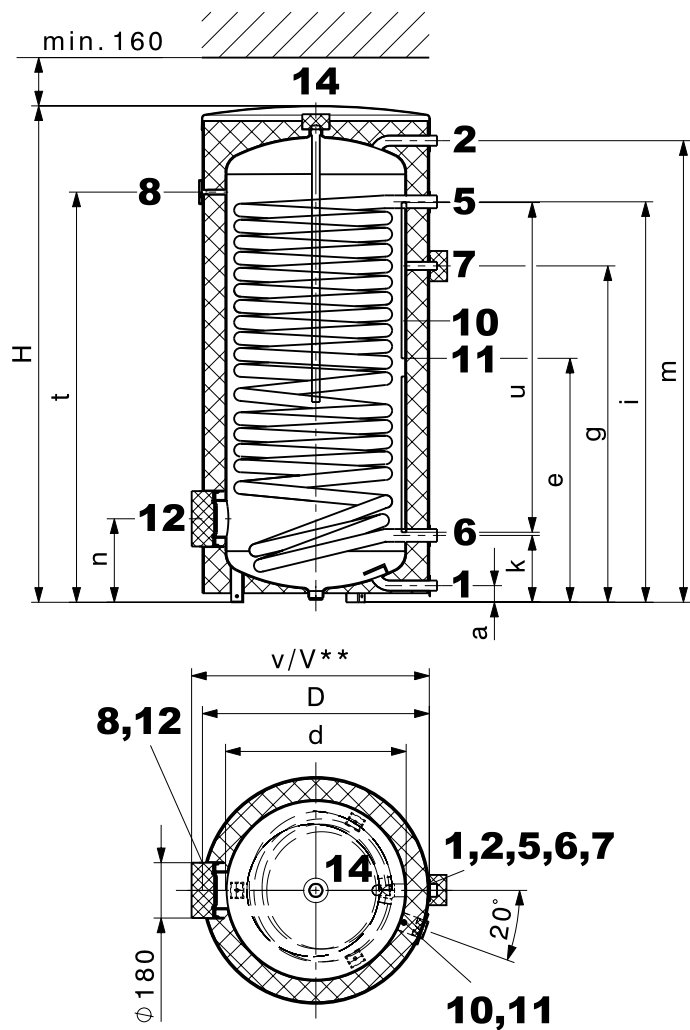

- |                      |                                    |               |   |
|----------------------|------------------------------------|---------------|---|
| 1 Cold water         | type (200)                         | G 3/4" (ET)   | 10 Sensor channel, inner Ø 11 mm                              |
|                      | type (300,400)                     | G 1" (ET)     | 11 Removable cap (Ø 60 mm)                                    |
| 2 Domestic hot water | type (200)                         | G 3/4" (ET)   | for positioning the sensor in the sensor channel              |
|                      | type (300,400)                     | G 1" (ET)     | 12 Hand-hole flange (flange-mounted electric heating element) |
| 5 Heating flow       | type (200,300)                     | G 1" (ET)     | Ø 180/120 mm, pitch circle 150 mm, 8 x M10                    |
|                      | type (400)                         | G 1 1/4" (ET) | 14 Anode sleeve Rp 1" (IT)                                    |
| 6 Heating return     | type (200,300)                     | G 1" (ET)     |   |
|                      | type (400)                         | G 1 1/4" (ET) |   |
| 7 Circulation        | (removable insulated cap Ø 100 mm) | G 3/4" (ET)   |   |
| 8 Thermometer        |                                    |               |   |

Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm

CombiVal ESR type	D	d	H	a	e	g	i	k	m	n	t	u	v	V**	Tilting dimension
(200)	600	450	1464	55	740	789	902	194	1373	249	1229	1060	635	650	1583
(300)	700	597	1326	55	669	850	991	221	1229	276	1069	860	745	760	1524
(400)	750	597	1629	55	807	1112	1324	221	1526	276	1359	1060	795	810	1788

\*\* When using a flange-mounted electric heating element

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval CombiVal ESSR

Calorifier with special coil  
for combined heating  
CombiVal ESSR (500-1000)





**Table of contents**

■ Description	5
■ Part numbers	6
■ Technical data	8
■ Dimensions	14



**Hoval calorifier  
 CombiVal ESSR (500)**

- Calorifier made of steel enamelled inside
- Plain-tube coil, with large heating surface, enamelled, permanently installed
- Magnesium protection anode built in
- Flange for electric heating element
- Thermal insulation made of polyurethane hard foam foamed on the calorifier
- Dismantable foil jacket, colour red
- Sensor channel
- Including thermometer

*On request*

- Flange-mounted electric heating element
- Screw-in electric heating element 1½"

*Delivery*

- Calorifier with foil jacket completely installed

**Hoval calorifier  
 CombiVal ESSR (800,1000)**

- Calorifier made of steel, enamelled inside
- Plain-tube coil, with large heating surface, enamelled, permanently installed
- Correx® potentiostat included
- 2 impressed current anodes incl. connecting cable integrated
- Flange below as cleaning flange or for the installation of a flange-mounted electric heating element or dummy flange with immersion sleeve
- Flange above as additional cleaning flange or for the installation of a flange-mounted electric heating element
- Thermal insulation made of polyester fleece with foil jacket, colour red
- Two terminal bars for contact sensor
- Including thermometer

*On request*

- Flange-mounted electric heating element

*Delivery*

- Calorifier and thermal insulation completely installed (can be removed for installation)



**Range**

CombiVal  
 type

ESSR	(500)	<b>B</b> ▶
ESSR	(800)	
ESSR	(1000)	

A\* → F

Calorifier



**CombiVal ESSR (500-1000)**

Calorifier made of steel enamelled inside.  
With built-in, enamelled plain-tube coil.

CombiVal ESSR type	Content l	Heating surface m <sup>2</sup>
(500)	465	5.90
(800)	733	7.00
(1000)	961	9.15

**Authorisation number**

CombiVal ESSR (500-1000)  
SVGW test number 0503-4950

**Energy efficiency class**


see "Description"

**Electric heating elements**

see chapter "Electric heating elements"

Part No.

Accessories



**Flange cover 180 – 3/4"**

for the installation of the Correx<sup>®</sup> impressed current anode in flange Ø 180/110 mm, enamelled on the inside with Rp 3/4" sleeve  
Seal included

2077 035



**Flange with immersion sleeve**

for temperature sensor made of steel.  
On domestic water side, enamelled inside.

Flange dimensions:

- Outer Ø 180 mm,
- Pitch circle Ø 150 mm, 8 x M10

Immersion sleeve dimensions:

- Installation length = 120 mm,
- Outer Ø: 24 mm, inner Ø: 20 mm

6028 468



**Kit Correx<sup>®</sup> impressed current anode UP2.3-919-L395/1**

for long-term corrosion protection for installation in the enamelled calorifier with reduction R 1 1/4" (ET) - Rp 1" (IT) and R 1" (ET) - Rp 3/4" (IT)

Installation length: 395 mm

Connection cable length: 1 x 2000 mm

1 Correx<sup>®</sup> impressed current anode

684 760

Included in the scope of delivery for ESSR (800,1000)

In every case, either a Correx<sup>®</sup> impressed current anode or one/two magnesium protection anodes are allowed to be used.

Part No.



**Immersion sensor TF/2P/5/6T,  
L = 5.0 m with plug**  
for TopTronic® E controller modules/  
module expansions with exception of  
basic module district heating/fresh  
water or basic module district heating com,  
cable length: 5 m with plug  
sensor sleeve diameter: 6 x 50 mm,  
dewpoint-proof,  
operating temperature: -20 ... 105 °C,  
protection class: IP67

2056 788



**Immersion sensor TF/2P/5/6T, L = 5.0 m**  
for TopTronic® E controller modules/  
module expansions with exception of  
basic module district heating/fresh  
water or basic module district  
heating com,  
cable length: 5 m without plug  
sensor sleeve diameter: 6 x 50 mm,  
dewpoint-proof,  
operating temperature: -20 ... 105 °C,  
protection class: IP67

2055 888



**Immersion sensor TF/12N/2.5/6T,  
L = 2.5 m**  
for gas boiler with RS-OT  
Cable length: 2.5 m  
Sensor sleeve diameter: 6 x 50 mm,  
dewpoint-proof,  
operating temperature: -20 ... 105 °C,  
protection class: IP67

2056 791

**At TopTronic® E, immersion sensor is  
included in the boiler controller or in the  
heating controller set.**



**Calorifier thermostat control  
TW 12**  
Universal thermostat controller  
for thermostatic pump charge  
demand, setting in  
casing, visible from outside.  
15 ... 95 °C, switching difference 6 K,  
capillar length 700 mm  
incl. fastening material for  
Hoval calorifier, can be used with  
integrated immersion sleeve

6010 080

**Thermal water mixer**  
see "Various system components"

Services



**Services and associated scope of  
services**  
see separate catalogue "Hoval Services"

Commissioning by Hoval customer service  
is a prerequisite for warranty/guarantee  
activation.

**CombiVal ESSR (500-1000)**

Type		(500)	(800)	(1000)
• Volume	l	465	733	961
• Max. operating/test pressure SVGW	bar	6/12	6/12	6/12
• Max. operating/test pressure DVGW	bar	10/13	10/13	10/13
• Max. operating temperature	°C	95	95	95
• Thermal insulation PU foam, foamed onto calorifier	mm	75	-	-
• Thermal insulation polyester fleece	mm	-	100	100
• Thermal insulation $\lambda$	W/mK	0.027	0.027	0.027
• Fire protection class		B2	B2	B2
• Heat loss at 65 °C	W	78	126	144
• Transport weight	kg	232	304	387
• U value	W/m <sup>2</sup> K	0.316	0.374	0.375
<b>Heating battery (built in)</b>				
• Heating surface	m <sup>2</sup>	5.9	7	9.15
• Heating water	l	41	49.4	64.6
• Flow resistance <sup>1)</sup>	z value	10	11	14
• Max. operating/test pressure SVGW	bar	8/13	8/13	8/13
• Max. operating/test pressure DVGW	bar	10/13	10/13	10/13
• Max. operating temperature	°C	110	110	110
• Dimensions		see table of dimensions		

<sup>1)</sup> Flow resistance heating battery in mbar = flow rate (m<sup>3</sup>/h)<sup>2</sup> x z (1 mbar = 0.1 kPa)

**Performance figure**

Selection of the calorifier type  
at a hot water temperature of 45 °C

**Reading example**  
see engineering

T >	Comfort <sup>1)</sup>			Standard <sup>2)</sup>		
	60 °C	70 °C	80 °C	60 °C	70 °C	80 °C
NL v						
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						
12	500					
13						
14				500		
15						
16						
17						
18	800					
19						
20						
21		500				
22				800		
23						
24	1000					
25						
26					500	
27						
28			500			
29						
30						
31						
32						
33						
34						
35						
36				1000	500	
37						
38		800				
39						
40						
41						
42						
43						
44			800			
45						
46						
47						
48		1000				
49					800	
50						

T >	Comfort <sup>1)</sup>			Standard <sup>2)</sup>		
	60 °C	70 °C	80 °C	60 °C	70 °C	80 °C
NL v						
51						
52						
53						
54						
55						
56						
57						800
58			1000			
59						
60						
61						
62						
63					1000	
64						
65						
66						
67						
68						
69						
70						
71						
72						
73						
74						
75						
76						1000
77						
78						
79						
80						
81						
82						
83						
84						
85						
86						
87						
88						
89						
90						
91						
92						
93						
94						
95						
96						
97						
98						
99						
100						

T = heating flow

NL = performance figure


Performance figure NL acc. to DIN 4708 = number of flats which can be supplied with domestic hot water when the calorifier is heated and permanently reheated with the heat generator (standard flat: 1 bathroom – 4 rooms – 3.5 persons)

<sup>1)</sup> Calculation with simultaneity factor according to DIN 4708 (preferred for Switzerland)

<sup>2)</sup> Calculation with simultaneity factor according to Dresden Technical University

**10 min peak output/N number with domestic hot water 45 °C**  
 according to DIN 4708 (Comfort) and Dresden Technical University (Standard)


**Reading example**  
 see Engineering

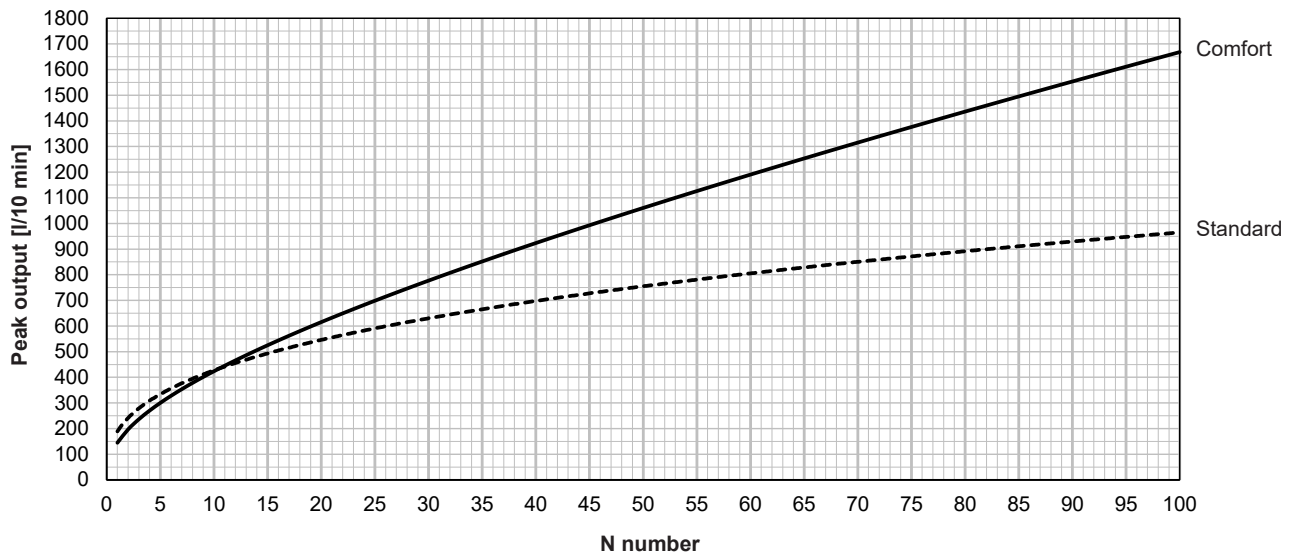



CombiVal ESSR (500)

Hot water output  
Continuous output



Reading example  
see engineering

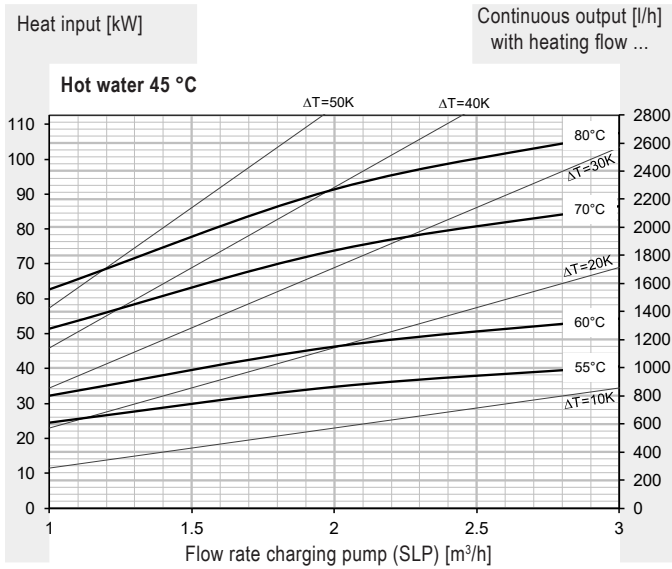

10 min peak output – hot water 45 °C \*

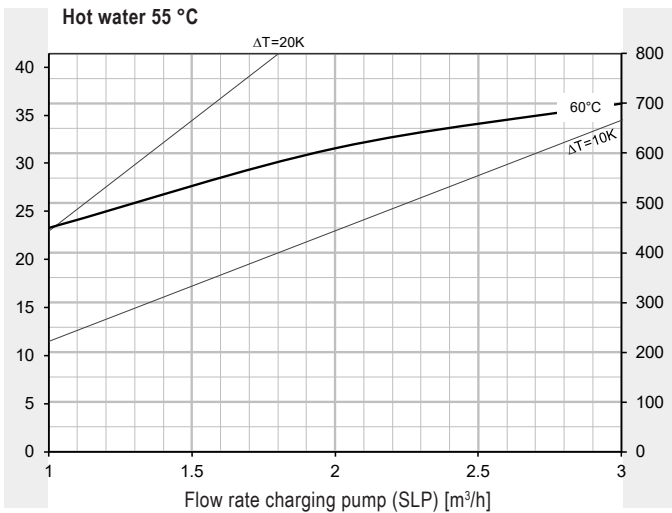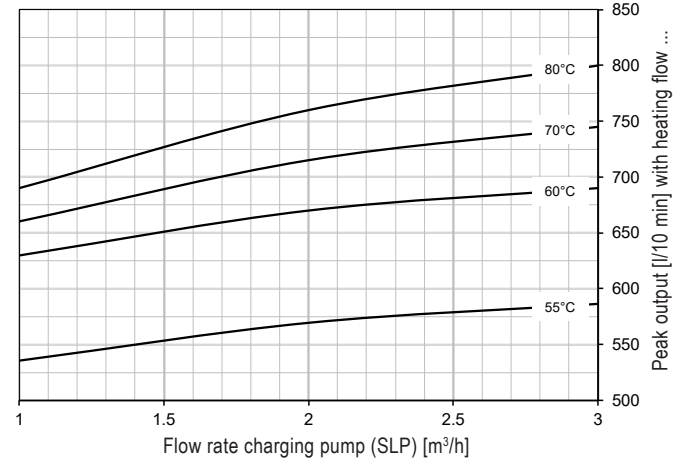

Pressure drop heating coil – delivery head charging pump

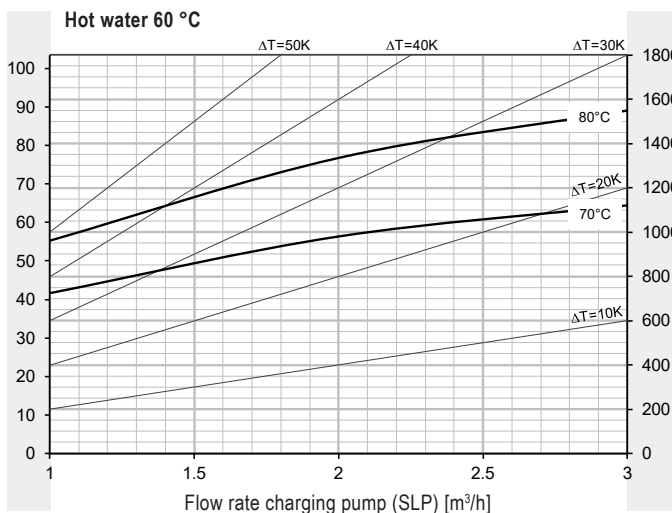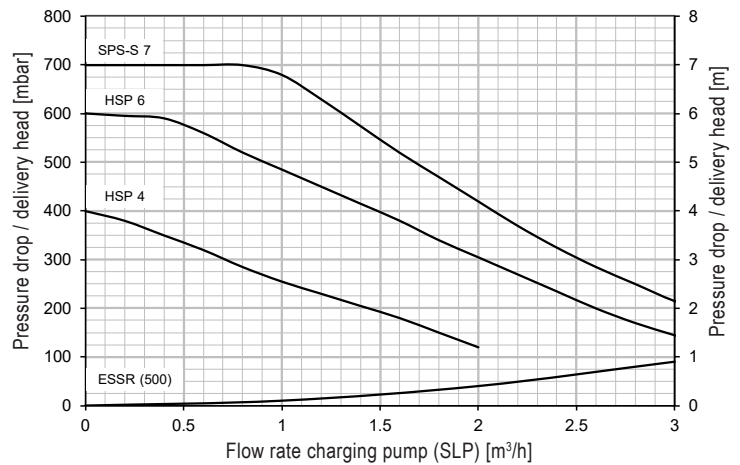


\* Calorifier heated to 60 °C



CombiVal ESSR (800)

Hot water output  
Continuous output



Reading example  
see engineering

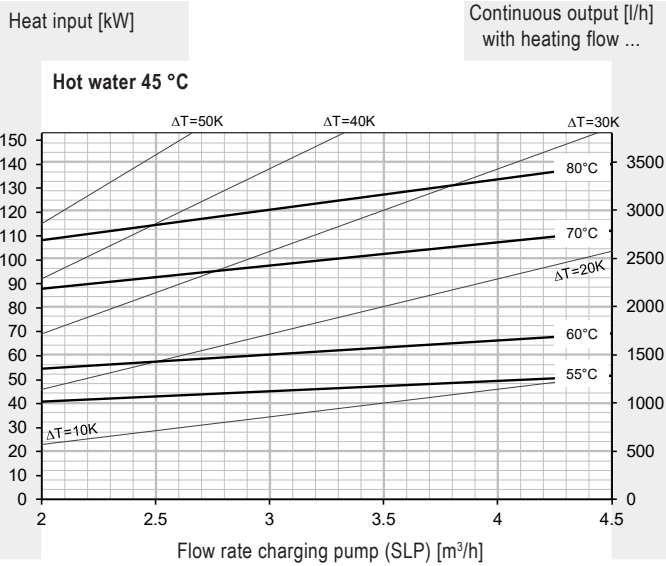

10 min peak output – hot water 45 °C \*

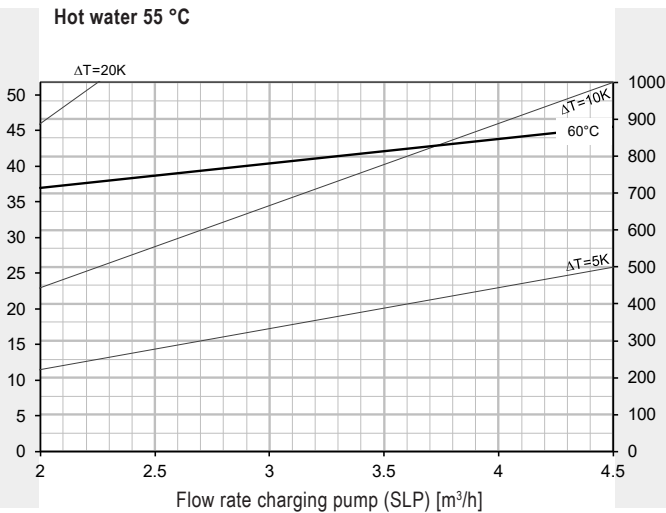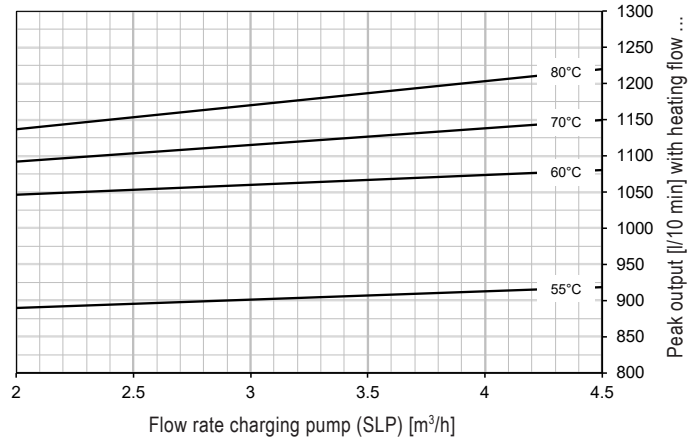

Pressure drop heating coil – delivery head charging pump




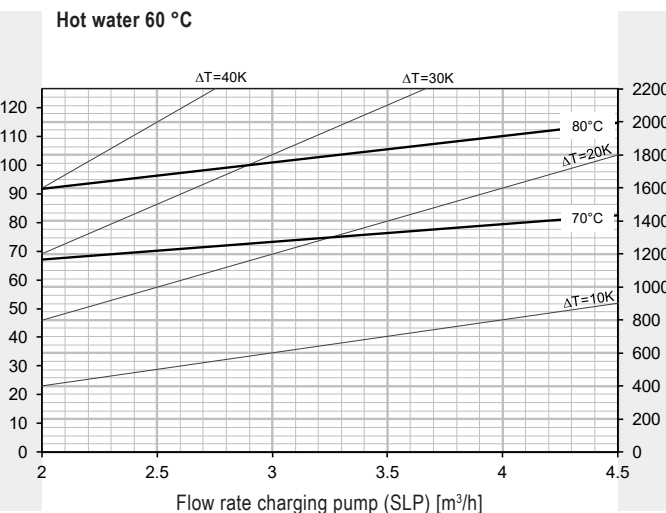
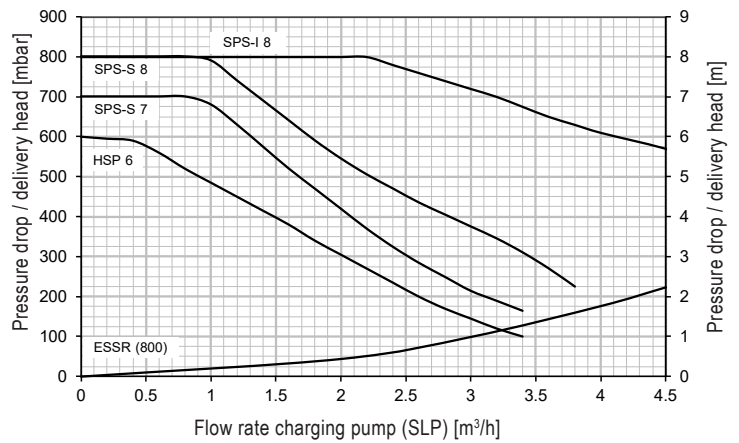


\* Calorifier heated to 60 °C

CombiVal ESSR (1000)



Hot water output  
Continuous output

Reading example  
see engineering

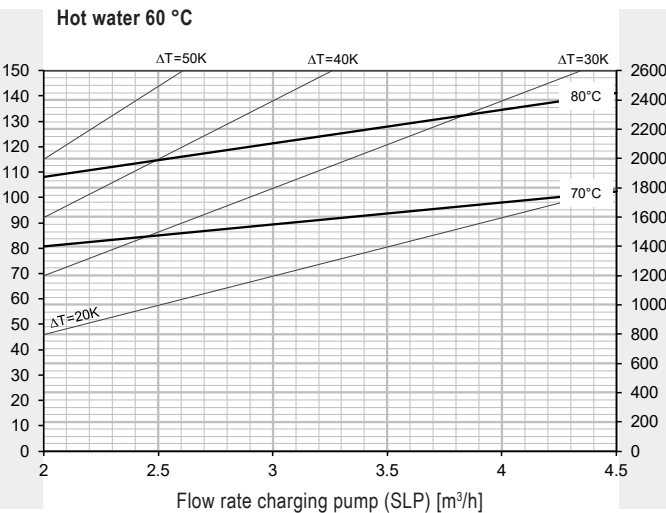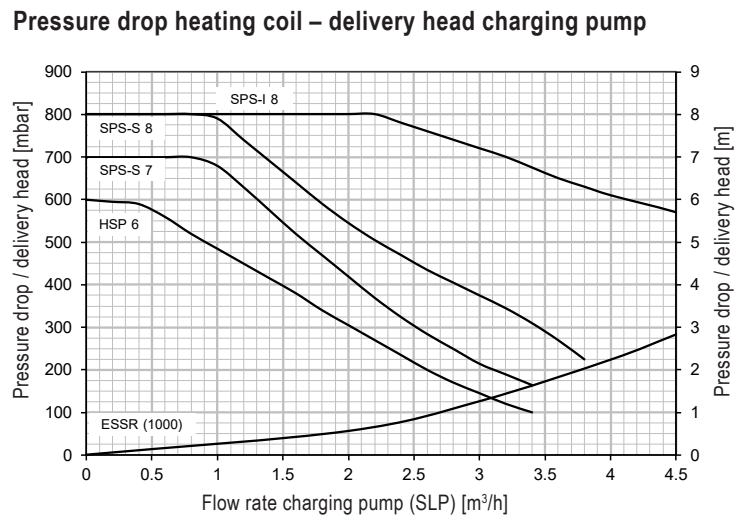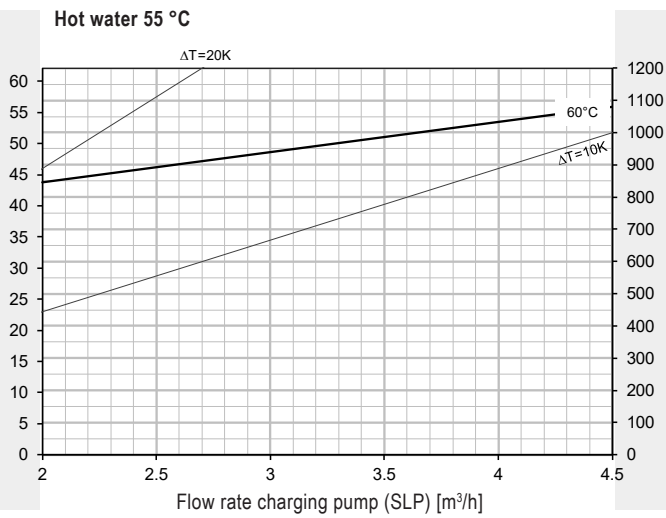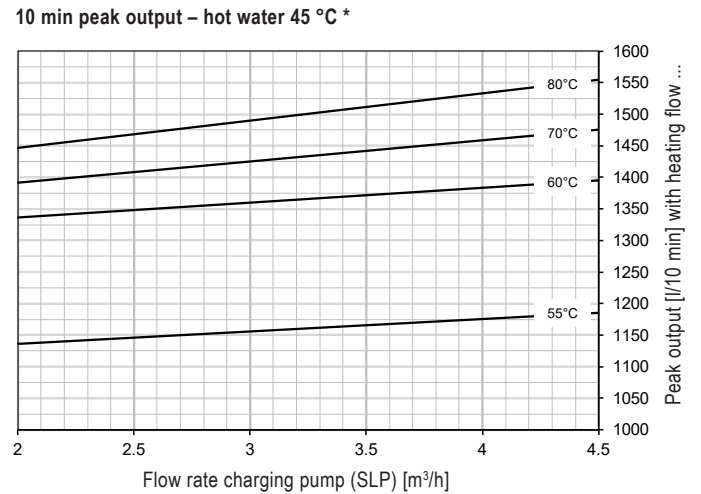
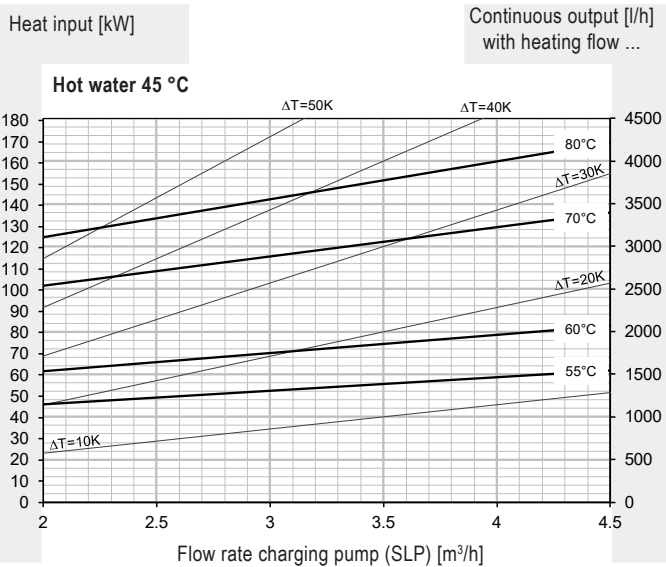


\* Calorifier heated to 60 °C

**CombiVal ESSR (500)**  
(Dimensions in mm)

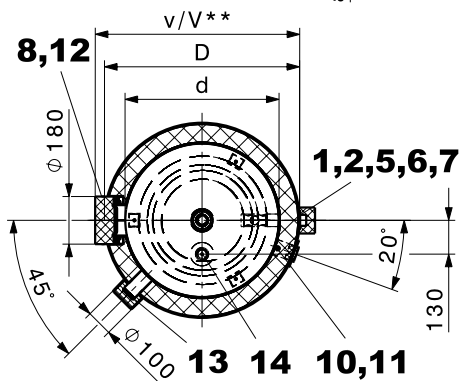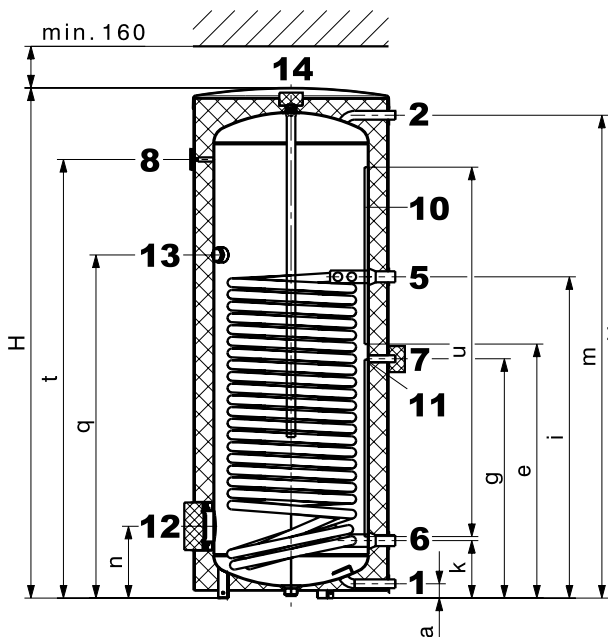

**CombiVal ESSR (800,1000)**

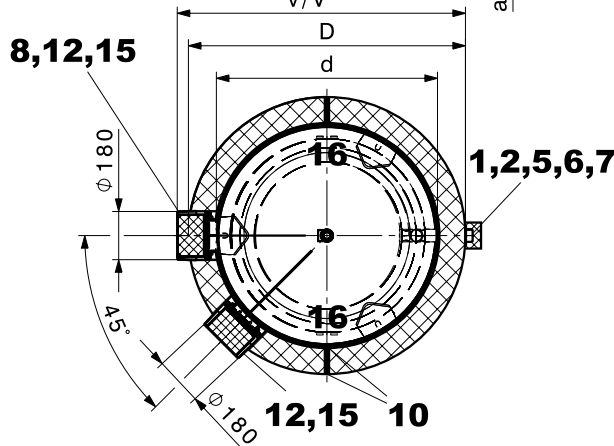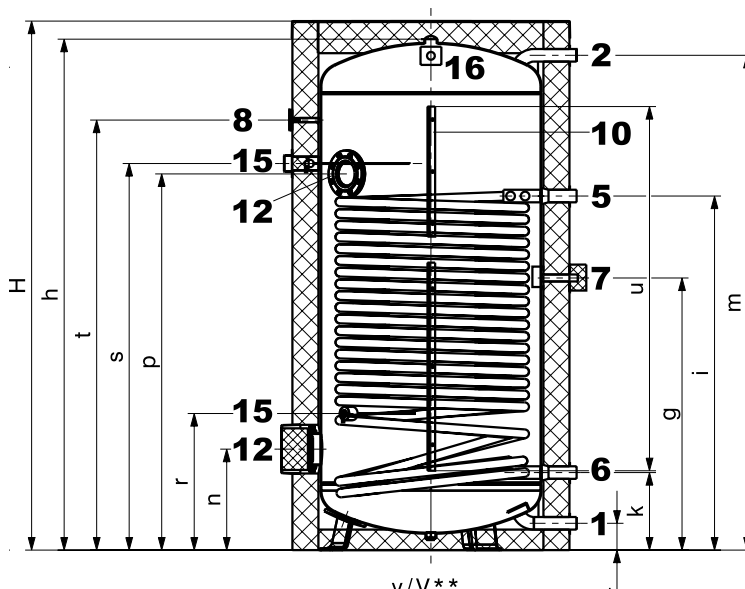

- 1 Cold water type (500) G 1" (ET)
- 2 Domestic hot water type (800,1000) G 1½" (ET)
- 5 Heating flow type (500) G 1¼" (ET)
- 6 Heating return type (800,1000) G 1½" (ET)
- 7 Circulation (removable insulated cap Ø 100 mm) type (500) G 1¼" (ET)
- 8 Thermometer type (800,1000) G 1½" (ET)

- 10 Sensor channel, inner Ø 11 mm type (500)
- 11 Removable cap (Ø 60 mm) for positioning the sensor in the sensor channel type (800,1000)
- 12 Hand-hole flange (flange-mounted electric heating element) Ø 180/120 mm, pitch circle 150 mm, 8 x M10 type (500) Rp 1½" (IT)
- 13 Connection for screw-in electric heating element (cap Ø 100 mm) type (800,1000) Rp ¾" (IT)
- 14 Anode sleeve type (500) Rp 1¼" (IT)
- 15 Correx® impressed current anode sleeve type (800,1000) Rp ¾" (IT)
- 16 Transport strap type (800,1000)

Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm

CombiVal ESSR type	D	d	H	h	a	e	g	i	k	m	n	p	r	q	s	t	u	v	v**	Tilting dimension
(500)	750	597	1953	-	55	977	920	1235	221	1856	276	-	-	1319	-	1686	1360	795	810	2093
(800)	950	750	2033	1937	104	-	995	1265	292	1890	382	1413	520	-	1497	1647	1400	975	1020	1962
(1000)	1050	850	2063	1963	103	-	1046	1361	298	1902	388	1446	525	-	1486	1653	1400	1075	1120	1991

\*\* When using a flange-mounted electric heating element

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval TransTherm<sup>®</sup> aqua

Calorifier charging system

TransTherm<sup>®</sup> aqua L

TransTherm<sup>®</sup> aqua L-FW





**Table of contents**

■ Description	5
■ Part numbers	7
■ Technical data	14
■ Dimensions	21
■ Example	36



**Calorifier charging system**

Consisting of:

- calorifier charging module TransTherm® aqua L  
 TransTherm® aqua L-FW (for indirect connection to the (district) heating network)
- hot water charging tank CombiVal E or CombiVal C (optional)

**Calorifier charging module**

**TransTherm® aqua L**

- Fully assembled station with plate heat exchanger for the provision of domestic hot water using the tank storage principle
- Intended for wall installation
- The primary side (heating side) contains the three-way valve, high-efficiency pump, air-bleeding, contact sensor and the filling and drain valve, line balancing valve. These components ensure a constant flow temperature at the plate heat exchanger. Pipes made from steel
- The secondary side (DHW side) contains the safety valve (10 bar), non-return valve, filling/drain valve and balancing valve. A flow sensor ensures the correct charging temperature for the hot process water storage tank. Pipes made from stainless steel
- Stainless steel plate heat exchanger 1.4404, copper-soldered or copper-free
- EPP insulation, 30 mm, for the heat exchanger
- Switch-on and switch-off of the charging pump is regulated via two sensors (included in the scope of delivery) in the storage tank.
- Mount tank sensor on the tank on site and connect it to the controller
- T-piece with dummy plug for on-site connection of the circulation group. Connect the pump to the controller on site.
- TopTronic® E control with integrated thermal disinfection of the DHW storage tank (anti-legionella circuit)

**Calorifier charging module**

**TransTherm® aqua L-FW**

- Fully assembled station with plate heat exchanger for the provision of domestic hot water using the tank storage principle
- Intended for wall installation
- The primary side (heating side) includes a flow rate controller with through valve and safety function, ventilation, sensor and fill/drain valve. These components ensure a constant flow temperature at the plate heat exchanger. Pipes made from steel
- The secondary side (DHW side) contains the safety valve (10 bar), non-return valve, filling/drain valve and balancing valve. A flow sensor ensures the correct charging temperature for the hot process water storage tank. Pipes made from stainless steel
- Stainless steel plate heat exchanger 1.4404, copper-soldered or copper-free
- EPP insulation, 30 mm, for the heat exchanger
- Switch-on and switch-off of the charging pump is regulated via two sensors (included in the scope of delivery) in the storage tank.
- Mount tank sensor on the tank on site and connect it to the controller



**Range**

Calorifier charging module

TransTherm® aqua L type	Output kW
(1-10)	50
(1-16)	90
(1-20)	115
(1-30)	175
(1-40)	230
(1-50)	275

Calorifier charging module

TransTherm® aqua L-FW type	Output kW
(2-10)	50
(2-16)	90
(2-20)	115
(2-30)	175
(2-40)	230
(2-50)	275



**Range**

Hot water charging tank

CombiVal E	Content l
(300)	B 301
(500)	B 475
(800)	747
(1000)	968
(1500)	1472
(2000)	2000

A\* → F



CombiVal C	Content l
(300)	B 289
(400)	B 411
(500)	B 490
(750)	B 756
(1000)	B 990
(1500)	B 1415
(2000)	B 1975
(2500)	B 2450

A\* → F

- T-piece with dummy plug for on-site connection of the circulation group. Connect the pump to the controller on site.
- TopTronic® E control with integrated thermal disinfection of the DHW storage tank (anti-legionella circuit)

**Delivery**

- The storage tank required is not included in the scope of delivery

**On site**

- Installation of a circulation unit; the necessary connection is provided.
- Electrical connection of the controller

**Heating network**

- Nominal pressure: 16 bar
- Maximum pressure: 13 bar
- Min. differential pressure: 0.6 bar
- Max. differential pressure: 12 bar
- Operating temperature: 70 ... 110 °C
- Maximum temperature: 120 °C

**Suitable hot water charging tanks**

see next page

**TopTronic® E controller**

**TopTronic® E basic module district heating/fresh water**

- Control unit for controlling district heating transfer stations in non-communicative networks and the corresponding consumers with integrated control functions for
  - primary valve control
  - cascade management
  - 1 heating/cooling circuit with mixer
  - 1 heating/cooling circuit without mixer
  - 1 hot water charging circuit
  - various additional functions
- Various functions for hot water:
  - selection of different basic programs (week programs, economy mode, holiday until, etc.)
  - various operating modes (e.g. accumulator priority or parallel mode)
  - buffer storage circuit on the primary or secondary side
  - adjustable loading criteria (e.g. adjustable loading times, undershooting the minimum nominal value, etc.)
  - adjustable switch-off criteria (e.g. achieving the setpoint valve, achieving the lower sensor setpoint value, etc.)

- adjustable loading block (if the loading flow temperature is too low, the setpoint temperature is not reached, differential temperature-dependent solar circuit control)
- definable switching times for recirculation pump control
- Outdoor sensor
- Immersion sensor (calorifier sensor)
- Contact sensor (flow temperature sensor)
- Complete plug set for DH module
- RPM-regulated pumps

**No further module expansions or controller modules can be installed in the control panel!**

#### Option

##### TopTronic® E control module

- Simple, intuitive operating concept
- Display of the most important operating states
- Configurable start screen
- Operating mode selection
- Configurable day and week programs
- Operation of all connected Hoval CAN bus modules
- Commissioning wizard
- Service and maintenance function
- Fault message management
- Analysis function
- Weather display (with HovalConnect option)
- Adaptation of the heating strategy based on the weather forecast (with HovalConnect option)

#### Notice

The TopTronic® E control module for operating the basic module district heating/fresh water must be ordered separately!

**Further information about the TopTronic® E** see "Controls"

#### Delivery

- All armatures required for operation, such as flow balancing and shut-off valves, backflow preventer, air-bleeding and drain valve are fitted.

#### Caution

As a result of thermal disinfection of the domestic hot water for legionella protection, increased water temperatures (at least 65 ... 70 °C) occur. Depending on the water quality, this may result in increased calcification at the installed armatures and heat exchangers and also brings the risk of scalding at the tapping points. Corresponding protective measures must be implemented on site.

#### CombiVal E (300-2000)

- Charging tank made of steel, enamelled inside (without built-in heating coil) for combination with calorifier charging module TransTherm® aqua L
- (300-1000) with one flange (1500,2000) with two flanges in each case with installed dummy flange plate for maintenance or installation of a flange-mounted electric heating element
- (300-1000) one magnesium protection anode built in (1500,2000) two magnesium protection anodes built in
- Thermal insulation made of
  - (300,500) polyurethane rigid foam, directly foamed, with dismantable foil jacket, 1-part, colour red
  - (800-2000) polyester fleece with foil jacket, completely removable, colour red (800-1500) 2-part (2000) 3-part
- Including thermometer
- (300,500) sensor channel (800-2000) two terminal bars for contact sensor

#### Delivery

- (300,500) with foil jacket completely installed
- (800-2000) with thermal insulation completely installed (removable)

#### Design on request

- Flange-mounted electric heating element

#### On site

- Installation of the thermometer
- Attachment of the glue-on protection rosettes to the thermal insulation

#### Water quality

see end of this brochure

#### CombiVal C (300-2500)

- Charging tank made of stainless steel (1.4571/1.4404) (without built-in heating coil) for combination with calorifier charging module TransTherm® aqua L
- (300-1000) with one flange (1500-2000) with two flanges (2500) with one manhole in each case with installed dummy flange plate for maintenance or, for types (300-2000), installation of a flange-mounted electric heating element
- Thermal insulation: Neodul® insulation (EPS rigid foam outside and 20 mm polyester fibre fleece inside) with zip, outer jacket made of polypropylene, colour red (300-1000) 2-piece (1500) 3-piece (2000-2500) 4-piece
- Thermometer incl. immersion sleeve loose (packed with the product)
- Sensor terminal bar
- Observe limit values for chloride content in domestic water – see "Engineering".

#### Delivery

- (300-1000) with thermal insulation completely installed (can be removed for bringing in)
- (1500-2500) thermal insulation separately packed

#### Design on request

- (300-2000) Flange-mounted electric heating element

#### On site

- Installation of immersion sleeve for thermometer
- (1500-2500) Installation of the thermal insulation and attaching the protection rosettes

Calorifier charging module



**TransTherm® aqua L**

Fully assembled station with plate heat exchanger for the provision of domestic hot water using the storage tank charging principle and built-in Hoval TopTronic® E control  
The required storage tank is not supplied.

TransTherm® aqua L	Output kW
(1-10)	50
(1-16)	90
(1-20)	115
(1-30)	175
(1-40)	230
(1-50)	275

**Authorisation number**

TransTherm® aqua L  
SVGW test number 2407-7331

**Part No.**

8005 864  
8005 865  
8005 866  
8005 867  
8005 868  
8005 869

Version with copper-free heat exchanger

**TransTherm® aqua L**

with copper-free heat exchanger

TransTherm® aqua L	Output kW
(1-10)	50
(1-16)	90
(1-20)	115
(1-30)	175
(1-40)	230
(1-50)	275

8006 491  
8006 492  
8006 493  
8006 494  
8006 495  
8006 496

**Calorifier charging module**



**TransTherm® aqua L-FW**

Fully assembled station with plate heat exchanger for the provision of domestic hot water using the storage tank charging principle and built-in Hoval TopTronic® E control  
 The required storage tank is not supplied.

Authorisation number	
TransTherm® aqua L-FW	
SVGW test number	2407-7331

TransTherm® aqua L	Output kW
(2-10)	50
(2-16)	90
(2-20)	115
(2-30)	175
(2-40)	230
(2-50)	275

**Part No.**

8006 353
8006 354
8006 355
8006 356
8006 367
8006 368

**Version with copper-free heat exchanger**


**TransTherm® aqua L-FW**

with copper-free heat exchanger

TransTherm® aqua L	Output kW
(2-10)	50
(2-16)	90
(2-20)	115
(2-30)	175
(2-40)	230
(2-50)	275

8006 497
8006 498
8006 499
8006 500
8006 501
8006 502

Accessories



**TopTronic® E control module black with 4.3" colour touchscreen**

For operation of all controller modules connected to the bus system (basic, solar, buffer modules etc.)  
Connection to the Hoval bus system via RJ45 plug connection or via plug terminals (max. 0.75 mm<sup>2</sup>), flat design with flexible installation option

Installation:

- in control panel of the heat generator
- in the Hoval wall casing
- in the control panel front, black high-gloss cover, customer-specific configurable start screen,

Display of current weather or weather forecast (only possible in combination with HovalConnect)

Consisting of:

- TopTronic® E control module black
- Clamping device set control module
- RJ45-RAST 5 CAN cable, L = 500



**Return changeover valve set**

Consisting of:

- temperature sensor
- changeover valve
- drive (8 sec.) DN 20-40
- drive (30 sec.) DN 50-80
- seals
- screw connections

Nominal diameter	Output kW	k <sub>vs</sub> m <sup>3</sup> /h
DN 20	50-90	6.3
DN 25	115-175	10
DN 32	230-275	16
DN 40	350	25
DN 50	450	40
DN 65	580	63
DN 80	700	100

6043 844

7010 832  
7010 836  
7011 009  
7011 025  
7016 331  
7016 332  
7016 333

**Notice**

When using a circulation set with integration at the heat exchanger (also on-site circulating pump), it is imperative to install a return switching valve set.

**Notice**

Only for TransTherm® aqua L



**Circulation set**

for TransTherm® aqua L, L-FW, F

Piping of parts in contact with domestic water in stainless steel and gunmetal

Consisting of:

- temperature sensor PT1000
- recirculation pump Wilo Yonos PARA
- recirculation pump Wilo Para MAXO
- regulating valve
- non-return valve

Connection	Flow rate m <sup>3</sup> /h	Recirculation pump
DN 20 ¾" Rp	1.9	Z15/7.0 RKC
DN 25 1" Rp	3.4	Z25/180/08/F02
DN 32 1¼" Rp	5.8	Z25/180/08/F02

8005 279  
8005 280  
8005 281

Part No.



**Test valve DN 8 G 1/4"**  
for TransTherm® aqua L, L-FW, F, FS  
Test valve suitable for flame treatment  
for hygienic-microbiologic  
tests.

2049 861



**Sludge separator DM with magnet**  
made of technopolymer (PO) or  
brass with insulation (MS)

Type	Connection inches	Flow rate at 1.2 m/s flow speed m³/h	k <sub>v</sub> value m³/h
DM PO	Rp 1"	1.3	10.5
DM PO	Rp 1 1/4"	2.1	10.5
DM MS	Rp 1 1/2"	5.4	63.2
DM MS	Rp 2"	8.2	70.0

2054 376  
2085 523  
2085 527  
2085 528

**Additional sludge separators**  
see "Various system components"



**Insulation for sludge separator  
DM PO 1"**  
10 mm insulating caps made of PE-X foam  
Thermal conductivity 0.035 W/mK  
Fire resistance (DIN 4102): class B2

2085 524



**Insulation for sludge separator  
DM PO 1 1/4"**  
10 mm insulating caps made of PE-X foam  
Thermal conductivity 0.035 W/mK  
Fire resistance (DIN 4102): class B2

2086 031



**Ball valve**  
Shut-off valve between heating network  
and TransTherm aqua L-FW  
Material: steel  
Weld end/external thread

Size	Max. operat- ing pressure bar	Max. operat- ing tempera- ture °C	External thread
DN 25	25	150	G 1"
DN 32	25	150	G 1 1/4"

2085 081  
2085 082



**Temperature monitor 0 ... 120 °C**  
for TransTherm® aqua L, L-FW, F, FS

2048 299



**Safety temperature monitor 70 ... 130 °C**  
for TransTherm® aqua L, L-FW, F, FS

2048 300



**Safety temperature limiter 70 ... 130 °C**  
for TransTherm® aqua L, L-FW, F, FS

2049 619



**Immersion sleeve G 1/2" stainless steel  
for thermostat**  
for TransTherm® aqua L, L-FW, F, FS  
Installation length = 100 mm  
Outer Ø: 8 mm, inner Ø: 6.5 mm

2048 285



**Immersion sleeve G 1/2" stainless steel  
for 2 thermostats**  
for TransTherm® aqua L, L-FW, F, FS  
Installation length = 100 mm  
Outer Ø: 15 mm, inner Ø: 13.5 mm

2048 288

Part No.

Hot water charging tank



**CombiVal E**  
**Enamelled charging tank**  
**(without heating coil)**

- CombiVal E (300-1000) with one flange  
CombiVal E (1500,2000) with two flanges
- (300,500) thermal insulation mounted with foil jacket
  - (800-2000) Thermal insulation completely installed (removable)

CombiVal type	Content l
E (300)	301
E (500)	475
E (800)	747
E (1000)	968
E (1500)	1472
E (2000)	2000

Part No.

6044 187
6044 188
6044 189
6044 190
6044 191
6044 192



**CombiVal C**  
**Stainless steel charging tank**  
**(without heating coil)**

- CombiVal C (300-1000) with one flange  
CombiVal C (1500-2000) with two flanges  
CombiVal C (2500) with one manhole thermal insulation
- (300-1000) completely installed (removable)
  - (1500-2000) separately packed


CombiVal type	Content l
C (300)	289
C (400)	411
C (500)	490
C (750)	756
C (1000)	990
C (1500)	1415
C (2000)	1975
C (2500)	2450

6065 396
6065 397
6065 398
6065 399
6065 400
6065 401
6065 402
6065 543

**Energy efficiency class**  
see "Description"

**Electric heating elements**  
see chapter "Electric heating elements"

For CombiVal E (300-2000)



**Flange cover 180 – ¾"**  
for the installation of the Correx®  
impressed current anode in flange  
Ø 180/110 mm, enamelled on the  
inside with Rp ¾" sleeve  
Seal included

2077 035



UP 2.3-919


**Kit Correx® impressed current anode  
UP2.3-919-L395/1**

for long-term corrosion protection for  
installation in the enamelled calorifier  
with reduction R 1¼" (ET) - Rp 1" (IT)  
and R 1" (ET) - Rp ¾" (IT)  
Installation length: 395 mm  
Connection cable length: 1 x 2000 mm  
1 Correx® impressed current anode

684 760


Either a Correx® impressed current anode or  
one/two magnesium protection anodes may  
be used.

For CombiVal C (300-2500)



**Flange cover 180 – 1½"**  
for the installation of the Correx®  
impressed current anode in flange  
Ø 180/110 mm, stainless steel with  
Rp 1½" sleeve  
Seal and screws included

2077 911



UP 1.9-924

**Kit Correx® impressed current anode  
UP1.9-924-L395/1**

for long-term corrosion protection for  
installation in the stainless steel  
calorifier  
with reduction R 1½" - Rp ¾"  
and R 1¼" - Rp ¾"  
Installation length: 395 mm  
Connection cable length: 1 x 3500 mm  
1 Correx® impressed current anode  
(up to 800 l)

6031 813

The flange cover 180 – 1½" must also be  
ordered for installation of the impressed cur-  
rent anode set.

Services



**Services and associated scope of  
services**  
see separate catalogue "Hoval Services"

Commissioning by Hoval customer service  
is a prerequisite for warranty/guarantee  
activation.

Performance data

TransTherm® aqua L (1-10 to 1-50) / TransTherm® aqua L-FW (2-10 to 2-50)

Domestic water secondary TransTherm® aqua L TransTherm® aqua L-FW			Flow temperature heating water											
			55 °C (1-...)						60 °C (1-...)					
			(10)	(16)	(20)	(30)	(40)	(50)	(10)	(16)	(20)	(30)	(40)	(50)
60/5 °C	T return primary °C	-	-	-	-	-	-	-	-	-	-	-	-	
	<b>V primary</b> m³/h	-	-	-	-	-	-	-	-	-	-	-	-	
	Q max. kW	-	-	-	-	-	-	-	-	-	-	-	-	
	<b>V secondary</b> m³/h	-	-	-	-	-	-	-	-	-	-	-	-	
60/10 °C	T return primary °C	-	-	-	-	-	-	-	-	-	-	-	-	
	<b>V primary</b> m³/h	-	-	-	-	-	-	-	-	-	-	-	-	
	Q max. kW	-	-	-	-	-	-	-	-	-	-	-	-	
	<b>V secondary</b> m³/h	-	-	-	-	-	-	-	-	-	-	-	-	
60/15 °C	T return primary °C	-	-	-	-	-	-	-	-	-	-	-	-	
	<b>V primary</b> m³/h	-	-	-	-	-	-	-	-	-	-	-	-	
	Q max. kW	-	-	-	-	-	-	-	-	-	-	-	-	
	<b>V secondary</b> m³/h	-	-	-	-	-	-	-	-	-	-	-	-	
60/20 °C	T return primary °C	-	-	-	-	-	-	-	-	-	-	-	-	
	<b>V primary</b> m³/h	-	-	-	-	-	-	-	-	-	-	-	-	
	Q max. kW	-	-	-	-	-	-	-	-	-	-	-	-	
	<b>V secondary</b> m³/h	-	-	-	-	-	-	-	-	-	-	-	-	
55/5 °C	T return primary °C	-	-	-	-	-	-	30	30	30	30	30	30	
	<b>V primary</b> m³/h	-	-	-	-	-	-	<b>1.25</b>	<b>2.04</b>	<b>2.51</b>	<b>3.71</b>	<b>4.76</b>	<b>5.66</b>	
	Q max. kW	-	-	-	-	-	-	43	70	86	127	163	194	
	<b>V secondary</b> m³/h	-	-	-	-	-	-	<b>0.74</b>	<b>1.2</b>	<b>1.48</b>	<b>2.18</b>	<b>2.8</b>	<b>3.33</b>	
55/10 °C	T return primary °C	-	-	-	-	-	-	30	30	30	30	30	30	
	<b>V primary</b> m³/h	-	-	-	-	-	-	<b>1.11</b>	<b>2.04</b>	<b>2.51</b>	<b>3.71</b>	<b>4.76</b>	<b>5.63</b>	
	Q max. kW	-	-	-	-	-	-	38	70	86	127	163	193	
	<b>V secondary</b> m³/h	-	-	-	-	-	-	<b>0.73</b>	<b>1.34</b>	<b>1.64</b>	<b>2.43</b>	<b>3.12</b>	<b>3.69</b>	
55/15 °C	T return primary °C	-	-	-	-	-	-	30	30	30	30	30	30	
	<b>V primary</b> m³/h	-	-	-	-	-	-	<b>0.76</b>	<b>1.46</b>	<b>1.95</b>	<b>3.06</b>	<b>4.23</b>	<b>5.4</b>	
	Q max. kW	-	-	-	-	-	-	26	50	67	105	145	185	
	<b>V secondary</b> m³/h	-	-	-	-	-	-	<b>0.56</b>	<b>1.08</b>	<b>1.44</b>	<b>2.26</b>	<b>3.12</b>	<b>3.98</b>	
55/20 °C	T return primary °C	-	-	-	-	-	-	30	30	30	30	30	30	
	<b>V primary</b> m³/h	-	-	-	-	-	-	<b>0.47</b>	<b>0.9</b>	<b>1.17</b>	<b>1.9</b>	<b>2.63</b>	<b>3.36</b>	
	Q max. kW	-	-	-	-	-	-	16	31	40	65	90	115	
	<b>V secondary</b> m³/h	-	-	-	-	-	-	<b>0.39</b>	<b>0.76</b>	<b>0.99</b>	<b>1.6</b>	<b>2.22</b>	<b>2.83</b>	
50/5 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	
	<b>V primary</b> m³/h	<b>1.29</b>	<b>2.03</b>	<b>2.51</b>	<b>3.67</b>	<b>4.72</b>	<b>5.66</b>	<b>1.28</b>	<b>2.04</b>	<b>2.51</b>	<b>3.71</b>	<b>4.76</b>	<b>5.63</b>	
	Q max. kW	37	58	72	105	135	162	44	70	86	127	163	193	
	<b>V secondary</b> m³/h	<b>0.71</b>	<b>1.11</b>	<b>1.37</b>	<b>2</b>	<b>2.58</b>	<b>3.09</b>	<b>0.84</b>	<b>1.34</b>	<b>1.64</b>	<b>2.43</b>	<b>3.12</b>	<b>3.69</b>	
50/10 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	
	<b>V primary</b> m³/h	<b>1.29</b>	<b>2.03</b>	<b>2.51</b>	<b>3.67</b>	<b>4.72</b>	<b>5.66</b>	<b>1.28</b>	<b>2.04</b>	<b>2.51</b>	<b>3.73</b>	<b>4.81</b>	<b>5.69</b>	
	Q max. kW	38	58	72	105	135	162	44	70	86	128	165	195	
	<b>V secondary</b> m³/h	<b>0.82</b>	<b>1.25</b>	<b>1.77</b>	<b>2.26</b>	<b>2.9</b>	<b>3.48</b>	<b>0.95</b>	<b>1.51</b>	<b>1.85</b>	<b>2.75</b>	<b>3.55</b>	<b>4.19</b>	
50/15 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	
	<b>V primary</b> m³/h	<b>1.29</b>	<b>2.03</b>	<b>2.51</b>	<b>3.67</b>	<b>4.72</b>	<b>5.66</b>	<b>1.11</b>	<b>1.95</b>	<b>2.48</b>	<b>3.76</b>	<b>4.76</b>	<b>5.69</b>	
	Q max. kW	37	58	72	105	135	162	38	67	85	129	163	195	
	<b>V secondary</b> m³/h	<b>0.91</b>	<b>1.43</b>	<b>1.77</b>	<b>2.58</b>	<b>3.32</b>	<b>3.99</b>	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.01</b>	<b>4.8</b>	
50/20 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	
	<b>V primary</b> m³/h	<b>1.15</b>	<b>2.03</b>	<b>2.55</b>	<b>3.7</b>	<b>4.75</b>	<b>5.69</b>	<b>0.96</b>	<b>1.69</b>	<b>2.13</b>	<b>3.24</b>	<b>3.63</b>	<b>5.16</b>	
	Q max. kW	33	58	73	106	136	163	33	58	73	111	145	177	
	<b>V secondary</b> m³/h	<b>0.95</b>	<b>1.67</b>	<b>2.1</b>	<b>3.05</b>	<b>3.91</b>	<b>4.69</b>	<b>0.95</b>	<b>1.67</b>	<b>2.1</b>	<b>3.19</b>	<b>4.17</b>	<b>5.09</b>	

T return primary °C Return temperature primary  
**V primary** m³/h Flow rate primary  
 Q max. kW Output  
**V secondary** m³/h Flow rate secondary

The specified technical data relate to the full load of the module in each case.

Performance data

TransTherm® aqua L (1-10 to 1-50) / TransTherm® aqua L-FW (2-10 to 2-50)

Flow temperature heating water

Domestic water secondary	TransTherm® aqua L TransTherm® aqua L-FW	65 °C (1-...)											70 °C (1-...)													
		(10)	(16)	(20)	(30)	(40)	(50)	(10)	(16)	(20)	(30)	(40)	(50)	(10)	(16)	(20)	(30)	(40)	(50)							
60/5 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30			
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>1.08</b>	<b>1.88</b>	<b>2.5</b>	<b>3.73</b>	<b>4.84</b>	<b>5.77</b>	<b>1.32</b>	<b>2.09</b>	<b>2.59</b>	<b>3.76</b>	<b>4.82</b>	<b>5.72</b>	<b>1.32</b>	<b>2.09</b>	<b>2.59</b>	<b>3.76</b>	<b>4.82</b>	<b>5.72</b>	<b>1.32</b>	<b>2.09</b>	<b>2.59</b>	<b>3.76</b>	<b>4.82</b>	<b>5.72</b>
	Q max.	kW	43	75	100	149	193	230	60	95	118	171	219	260	60	95	118	171	219	260	60	95	118	171	219	260
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.67</b>	<b>1.17</b>	<b>1.55</b>	<b>2.33</b>	<b>3.01</b>	<b>3.59</b>	<b>0.94</b>	<b>1.48</b>	<b>1.84</b>	<b>2.67</b>	<b>3.42</b>	<b>4.06</b>	<b>0.94</b>	<b>1.48</b>	<b>1.84</b>	<b>2.67</b>	<b>3.42</b>	<b>4.06</b>	<b>0.94</b>	<b>1.48</b>	<b>1.84</b>	<b>2.67</b>	<b>3.42</b>	<b>4.06</b>
60/10 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>0.8</b>	<b>1.5</b>	<b>2.01</b>	<b>3.16</b>	<b>4.34</b>	<b>5.39</b>	<b>1.08</b>	<b>1.94</b>	<b>2.48</b>	<b>3.77</b>	<b>4.95</b>	<b>5.92</b>	<b>1.08</b>	<b>1.94</b>	<b>2.48</b>	<b>3.77</b>	<b>4.95</b>	<b>5.92</b>	<b>1.08</b>	<b>1.94</b>	<b>2.48</b>	<b>3.77</b>	<b>4.95</b>	<b>5.92</b>
	Q max.	kW	32	60	80	126	173	215	50	90	115	175	230	275	50	90	115	175	230	275	50	90	115	175	230	275
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.55</b>	<b>1.03</b>	<b>1.38</b>	<b>2.17</b>	<b>2.98</b>	<b>3.7</b>	<b>0.86</b>	<b>1.54</b>	<b>1.98</b>	<b>3.01</b>	<b>3.95</b>	<b>4.73</b>	<b>0.86</b>	<b>1.54</b>	<b>1.98</b>	<b>3.01</b>	<b>3.95</b>	<b>4.73</b>	<b>0.86</b>	<b>1.54</b>	<b>1.98</b>	<b>3.01</b>	<b>3.95</b>	<b>4.73</b>
60/15 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>0.55</b>	<b>1.05</b>	<b>1.38</b>	<b>2.13</b>	<b>3.08</b>	<b>3.96</b>	<b>0.97</b>	<b>1.8</b>	<b>2.37</b>	<b>3.73</b>	<b>4.84</b>	<b>5.72</b>	<b>0.97</b>	<b>1.8</b>	<b>2.37</b>	<b>3.73</b>	<b>4.84</b>	<b>5.72</b>	<b>0.97</b>	<b>1.8</b>	<b>2.37</b>	<b>3.73</b>	<b>4.84</b>	<b>5.72</b>
	Q max.	kW	22	42	55	85	123	158	44	82	108	170	220	260	44	82	108	170	220	260	44	82	108	170	220	260
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.42</b>	<b>0.8</b>	<b>1.05</b>	<b>1.63</b>	<b>2.35</b>	<b>3.02</b>	<b>0.84</b>	<b>1.57</b>	<b>2.08</b>	<b>3.24</b>	<b>4.21</b>	<b>4.98</b>	<b>0.84</b>	<b>1.57</b>	<b>2.08</b>	<b>3.24</b>	<b>4.21</b>	<b>4.98</b>	<b>0.84</b>	<b>1.57</b>	<b>2.08</b>	<b>3.24</b>	<b>4.21</b>	<b>4.98</b>
60/20 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>0.3</b>	<b>0.6</b>	<b>0.8</b>	<b>1.28</b>	<b>1.75</b>	<b>2.33</b>	<b>0.62</b>	<b>1.14</b>	<b>2.05</b>	<b>2.4</b>	<b>3.43</b>	<b>4.22</b>	<b>0.62</b>	<b>1.14</b>	<b>2.05</b>	<b>2.4</b>	<b>3.43</b>	<b>4.22</b>	<b>0.62</b>	<b>1.14</b>	<b>2.05</b>	<b>2.4</b>	<b>3.43</b>	<b>4.22</b>
	Q max.	kW	12	24	32	51	70	93	28	52	68	109	156	192	28	52	68	109	156	192	28	52	68	109	156	192
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.26</b>	<b>0.52</b>	<b>0.69</b>	<b>1.1</b>	<b>1.51</b>	<b>2</b>	<b>0.6</b>	<b>1.12</b>	<b>1.47</b>	<b>2.36</b>	<b>3.36</b>	<b>4.14</b>	<b>0.6</b>	<b>1.12</b>	<b>1.47</b>	<b>2.36</b>	<b>3.36</b>	<b>4.14</b>	<b>0.6</b>	<b>1.12</b>	<b>1.47</b>	<b>2.36</b>	<b>3.36</b>	<b>4.14</b>
55/5 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>0.8</b>	<b>1.5</b>	<b>2.01</b>	<b>3.16</b>	<b>4.34</b>	<b>5.39</b>	<b>1.08</b>	<b>2.09</b>	<b>2.53</b>	<b>3.74</b>	<b>4.84</b>	<b>5.76</b>	<b>1.08</b>	<b>2.09</b>	<b>2.53</b>	<b>3.74</b>	<b>4.84</b>	<b>5.76</b>	<b>1.08</b>	<b>2.09</b>	<b>2.53</b>	<b>3.74</b>	<b>4.84</b>	<b>5.76</b>
	Q max.	kW	32	60	80	126	173	215	50	95	115	170	220	262	50	95	115	170	220	262	50	95	115	170	220	262
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.55</b>	<b>1.03</b>	<b>1.38</b>	<b>2.17</b>	<b>2.98</b>	<b>3.7</b>	<b>0.86</b>	<b>1.63</b>	<b>1.97</b>	<b>2.92</b>	<b>3.78</b>	<b>4.5</b>	<b>0.86</b>	<b>1.63</b>	<b>1.97</b>	<b>2.92</b>	<b>3.78</b>	<b>4.5</b>	<b>0.86</b>	<b>1.63</b>	<b>1.97</b>	<b>2.92</b>	<b>3.78</b>	<b>4.5</b>
55/10 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>1.3</b>	<b>2.06</b>	<b>2.53</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>1.08</b>	<b>1.87</b>	<b>2.42</b>	<b>3.74</b>	<b>4.84</b>	<b>5.72</b>	<b>1.08</b>	<b>1.87</b>	<b>2.42</b>	<b>3.74</b>	<b>4.84</b>	<b>5.72</b>	<b>1.08</b>	<b>1.87</b>	<b>2.42</b>	<b>3.74</b>	<b>4.84</b>	<b>5.72</b>
	Q max.	kW	52	82	101	148	192	225	49	85	110	170	220	260	49	85	110	170	220	260	49	85	110	170	220	260
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.99</b>	<b>1.57</b>	<b>1.93</b>	<b>2.83</b>	<b>3.67</b>	<b>4.3</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.24</b>	<b>4.21</b>	<b>4.98</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.24</b>	<b>4.21</b>	<b>4.98</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.24</b>	<b>4.21</b>	<b>4.98</b>
55/15 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>0.97</b>	<b>1.65</b>	<b>2.11</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>1.1</b>	<b>1.88</b>	<b>2.41</b>	<b>3.74</b>	<b>4.22</b>	<b>5.1</b>	<b>1.1</b>	<b>1.88</b>	<b>2.41</b>	<b>3.74</b>	<b>4.22</b>	<b>5.1</b>	<b>1.1</b>	<b>1.88</b>	<b>2.41</b>	<b>3.74</b>	<b>4.22</b>	<b>5.1</b>
	Q max.	kW	44	75	96	148	192	225	44	75	96	148	192	232	44	75	96	148	192	232	44	75	96	148	192	232
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>4.84</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.19</b>	<b>4.21</b>	<b>5</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.19</b>	<b>4.21</b>	<b>5</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.19</b>	<b>4.21</b>	<b>5</b>
55/20 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>0.95</b>	<b>1.68</b>	<b>2.13</b>	<b>3.23</b>	<b>4.24</b>	<b>5.14</b>	<b>0.84</b>	<b>1.47</b>	<b>1.87</b>	<b>2.84</b>	<b>3.72</b>	<b>4.51</b>	<b>0.84</b>	<b>1.47</b>	<b>1.87</b>	<b>2.84</b>	<b>3.72</b>	<b>4.51</b>	<b>0.84</b>	<b>1.47</b>	<b>1.87</b>	<b>2.84</b>	<b>3.72</b>	<b>4.51</b>
	Q max.	kW	38	67	85	129	169	205	38	67	85	129	169	205	38	67	85	129	169	205	38	67	85	129	169	205
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>
50/5 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>1.25</b>	<b>2.06</b>	<b>2.53</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>1.08</b>	<b>1.87</b>	<b>2.42</b>	<b>3.56</b>	<b>4.84</b>	<b>5.72</b>	<b>1.08</b>	<b>1.87</b>	<b>2.42</b>	<b>3.56</b>	<b>4.84</b>	<b>5.72</b>	<b>1.08</b>	<b>1.87</b>	<b>2.42</b>	<b>3.56</b>	<b>4.84</b>	<b>5.72</b>
	Q max.	kW	50	82	101	148	192	225	49	85	110	162	220	260	49	85	110	162	220	260	49	85	110	162	220	260
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.95</b>	<b>1.57</b>	<b>1.93</b>	<b>2.83</b>	<b>3.67</b>	<b>4.3</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.09</b>	<b>4.21</b>	<b>4.98</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.09</b>	<b>4.21</b>	<b>4.98</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.09</b>	<b>4.21</b>	<b>4.98</b>
50/10 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>1.1</b>	<b>1.88</b>	<b>2.41</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>0.97</b>	<b>1.65</b>	<b>2.11</b>	<b>3.25</b>	<b>4.22</b>	<b>5.1</b>	<b>0.97</b>	<b>1.65</b>	<b>2.11</b>	<b>3.25</b>	<b>4.22</b>	<b>5.1</b>	<b>0.97</b>	<b>1.65</b>	<b>2.11</b>	<b>3.25</b>	<b>4.22</b>	<b>5.1</b>
	Q max.	kW	44	75	96	148	192	225	44	75	96	148	192	232	44	75	96	148	192	232	44	75	96	148	192	232
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>4.84</b>	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>5</b>	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>5</b>	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>5</b>
50/15 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
	$\dot{V}$ primary	m <sup>3</sup> /h	<b>0.95</b>	<b>1.68</b>	<b>2.13</b>	<b>3.23</b>	<b>4.24</b>	<b>5.14</b>	<b>0.84</b>	<b>1.47</b>	<b>1.87</b>	<b>2.84</b>	<b>3.72</b>	<b>4.51</b>	<b>0.84</b>	<b>1.47</b>	<b>1.87</b>	<b>2.84</b>	<b>3.72</b>	<b>4.51</b>	<b>0.84</b>	<b>1.47</b>	<b>1.87</b>	<b>2.84</b>	<b>3.72</b>	<b>4.51</b>
	Q max.	kW	38	67	85	129	169	205	38	67	85	129	169	205	38	67	85	129	169	205	38	67	85	129	169	205
	$\dot{V}$ secondary	m <sup>3</sup> /h	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.1</b>																			

Performance data

TransTherm® aqua L (1-10 to 1-50) / TransTherm® aqua L-FW (2-10 to 2-50)

Temperature primary 70 °C flow/30 °C return

Domestic water heating

	TransTherm® aqua L	Cold water 10 °C, domestic water 60 °C					
	TransTherm® aqua L-FW	(10)	(16)	(20)	(30)	(40)	(50)
<b>kW</b>		50	90	115	175	230	275
<b>m³/h</b>		0.86	1.54	1.97	3.00	3.94	4.71
<b>l/min</b>		14.3	25.7	32.9	50.0	65.7	78.6
<b>l/s</b>		0.2	0.4	0.5	0.8	1.1	1.3

Tank size

Tank size l		I/10 min	Cold water 10 °C, domestic water 60 °C					
			(10)	(16)	(20)	(30)	(40)	(50)
300	<b>Ṽs</b>		443	557	629	800	-	-
	Hourly output	l/h at 60 °C	1157	1843	2271	3300	-	-
	<b>NL index</b>		16	30	39	60	-	-
400	<b>Ṽs</b>		543	657	729	900	-	-
	Hourly output	l/h at 60 °C	1257	1943	2371	3400	-	-
	<b>NL index</b>		18	32	41	64	-	-
500	<b>Ṽs</b>		643	757	829	1000	1157	-
	Hourly output	l/h at 60 °C	1357	2043	2471	3500	4443	-
	<b>NL index</b>		20	34	43	66	88	-
800	<b>Ṽs</b>		943	1057	1129	1300	1457	-
	Hourly output	l/h at 60 °C	1657	2343	2771	3800	4743	-
	<b>NL index</b>		26	40	49	73	96	-
1000	<b>Ṽs</b>		1143	1257	1329	1500	1657	1786
	Hourly output	l/h at 60 °C	1857	2543	2971	4000	4943	5714
	<b>NL index</b>		30	45	54	77	100	119
1500	<b>Ṽs</b>		-	1757	1829	2000	2157	2286
	Hourly output	l/h at 60 °C	-	3043	3471	4500	5443	6214
	<b>NL index</b>		-	56	65	89	112	131
2000	<b>Ṽs</b>		-	2257	2329	2500	2657	2786
	Hourly output	l/h at 60 °C	-	3543	3971	5000	5943	6714
	<b>NL index</b>		-	67	77	101	124	143
2500	<b>Ṽs</b>		-	2757	2829	3000	3157	3286
	Hourly output	l/h at 60 °C	-	4043	4471	5500	6443	7214
	<b>NL index</b>		-	79	89	113	137	160

**Ṽs** I/10 min 10 min peak output at 60 °C  
**NL index** Performance figure in accordance with DIN 4708 = number of flats which can be supplied with domestic hot water when the calorifier is heated and permanently reheated with the heat generator (standard flat: 1 bath – 4 rooms – 3.5 persons)

Performance data

TransTherm® aqua L (1-10 to 1-50) / TransTherm® aqua L-FW (2-10 to 2-50)

Tapping point (mixing temperature)

		TransTherm® aqua L		Cold water 10 °C, domestic water 45 °C					
		TransTherm® aqua L-FW	(10)	(16)	(20)	(30)	(40)	(50)	
		<b>kW</b>	50	90	115	175	230	275	
		<b>m³/h</b>	1.22	2.20	2.82	4.29	5.63	6.73	
		<b>l/min</b>	20.4	36.7	46.9	71.4	93.9	112.2	
		<b>l/s</b>	0.3	0.6	0.8	1.2	1.6	1.9	
<b>Tank size</b>									
<b>l</b>									
300	<b>Ṽs</b>	<b>I/10 min</b>	633	796	898	1143	-	-	
	Hourly output	l/h at 45 °C	1653	2633	3245	4714	-	-	
	<b>NL index</b>		16	30	39	60	-	-	
400	<b>Ṽs</b>	<b>I/10 min</b>	776	939	1041	1286	-	-	
	Hourly output	l/h at 45 °C	1796	2776	3388	4857	-	-	
	<b>NL index</b>		18	32	41	64	-	-	
500	<b>Ṽs</b>	<b>I/10 min</b>	918	1082	1184	1429	1653	-	
	Hourly output	l/h at 45 °C	1939	2918	3531	5000	6347	-	
	<b>NL index</b>		20	34	43	66	88	-	
800	<b>Ṽs</b>	<b>I/10 min</b>	1347	1510	1612	1857	2082	-	
	Hourly output	l/h at 45 °C	2367	3347	3959	5429	6776	-	
	<b>NL index</b>		26	40	49	73	96	-	
1000	<b>Ṽs</b>	<b>I/10 min</b>	1633	1796	1898	2143	2367	2551	
	Hourly output	l/h at 45 °C	2653	3633	4245	5714	7061	8163	
	<b>NL index</b>		30	45	54	77	100	119	
1500	<b>Ṽs</b>	<b>I/10 min</b>	-	2510	2612	2857	3082	3265	
	Hourly output	l/h at 45 °C	-	4347	4959	6429	7776	8878	
	<b>NL index</b>		-	56	65	89	112	131	
2000	<b>Ṽs</b>	<b>I/10 min</b>	-	3224	3327	3571	3796	3980	
	Hourly output	l/h at 45 °C	-	5061	5673	7143	8490	9592	
	<b>NL index</b>		-	67	77	101	124	143	
2500	<b>Ṽs</b>	<b>I/10 min</b>	-	3939	4041	4286	4510	4694	
	Hourly output	l/h at 45 °C	-	5776	6388	7857	9204	10306	
	<b>NL index</b>		-	79	89	113	137	160	

**Ṽs** **I/10 min** 10 min peak output at 45 °C  
**NL index** Performance figure in accordance with DIN 4708 = number of flats which can be supplied with domestic hot water when the calorifier is heated and permanently reheated with the heat generator (standard flat: 1 bath – 4 rooms – 3.5 persons)

Performance data

TransTherm® aqua L (1-10 to 1-50) / TransTherm® aqua L-FW (2-10 to 2-50)

Temperature primary 65 °C flow/30 °C return

Domestic water heating

	TransTherm® aqua L	Cold water 10 °C, domestic water 60 °C					
	TransTherm® aqua L-FW	(10)	(16)	(20)	(30)	(40)	(50)
<b>kW</b>		32	60	80	126	173	215
<b>m³/h</b>		0.55	1.03	1.37	2.16	2.97	3.69
<b>l/min</b>		9.1	17.1	22.9	36.0	49.4	61.4
<b>l/s</b>		0.2	0.3	0.4	0.6	0.8	1.0

Tank size

Tank size	<b>Ṽs</b>	<b>I/10 min</b>						
300	<b>Ṽs</b>	<b>I/10 min</b>	391	471	529	660	-	-
	Hourly output	l/h at 60 °C	849	1329	1671	2460	-	-
	<b>NL index</b>		10	19	26	43	-	-
400	<b>Ṽs</b>	<b>I/10 min</b>	491	571	629	760	-	-
	Hourly output	l/h at 60 °C	949	1429	1771	2560	-	-
	<b>NL index</b>		12	21	28	45	-	-
500	<b>Ṽs</b>	<b>I/10 min</b>	591	671	729	860	994	-
	Hourly output	l/h at 60 °C	1049	1529	1871	2660	3466	-
	<b>NL index</b>		14	23	30	47	65	-
800	<b>Ṽs</b>	<b>I/10 min</b>	891	971	1029	1160	1294	-
	Hourly output	l/h at 60 °C	1349	1829	2171	2960	3766	-
	<b>NL index</b>		19	30	36	53	72	-
1000	<b>Ṽs</b>	<b>I/10 min</b>	1091	1171	1229	1360	1494	1614
	Hourly output	l/h at 60 °C	1549	2029	2371	3160	3966	4686
	<b>NL index</b>		24	33	41	59	77	94
1500	<b>Ṽs</b>	<b>I/10 min</b>	-	1671	1729	1860	1994	2114
	Hourly output	l/h at 60 °C	-	2529	2871	3660	4466	5186
	<b>NL index</b>		-	44	52	69	89	106
2000	<b>Ṽs</b>	<b>I/10 min</b>	-	2171	2229	2360	2494	2614
	Hourly output	l/h at 60 °C	-	3029	3371	4160	4966	5686
	<b>NL index</b>		-	56	64	81	102	119
2500	<b>Ṽs</b>	<b>I/10 min</b>	-	2671	2729	2860	2994	3114
	Hourly output	l/h at 60 °C	-	3529	3871	4660	5466	6186
	<b>NL index</b>		-	65	75	93	113	131

**Ṽs** **I/10 min** 10 min peak output at 60 °C  
**NL index** Performance figure in accordance with DIN 4708 = number of flats which can be supplied with domestic hot water when the calorifier is heated and permanently reheated with the heat generator (standard flat: 1 bath – 4 rooms – 3.5 persons)

Performance data

TransTherm® aqua L (1-10 to 1-50) / TransTherm® aqua L-FW (2-10 to 2-50)

Tapping point (mixing temperature)

		TransTherm® aqua L		Cold water 10 °C, domestic water 45 °C					
		TransTherm® aqua L-FW	(10)	(16)	(20)	(30)	(40)	(50)	
		<b>kW</b>	32	60	80	126	173	215	
		<b>m³/h</b>	0.78	1.47	1.96	3.09	4.24	5.27	
		<b>l/min</b>	13.1	24.5	32.7	51.4	70.6	87.8	
		<b>l/s</b>	0.2	0.4	0.5	0.9	1.2	1.5	
<b>Tank size</b>									
<b>l</b>									
300	<b>ṽs</b>	<b>I/10 min</b>	559	673	755	943	-	-	
	Hourly output	l/h at 45 °C	1212	1898	2388	3514	-	-	
	<b>NL index</b>		10	19	26	43	-	-	
400	<b>ṽs</b>	<b>I/10 min</b>	702	816	898	1086	-	-	
	Hourly output	l/h at 45 °C	1355	2041	2531	3657	-	-	
	<b>NL index</b>		12	21	28	45	-	-	
500	<b>ṽs</b>	<b>I/10 min</b>	845	959	1041	1229	1420	-	
	Hourly output	l/h at 45 °C	1498	2184	2673	3800	4951	-	
	<b>NL index</b>		14	23	30	47	65	-	
800	<b>ṽs</b>	<b>I/10 min</b>	1273	1388	1469	1657	1849	-	
	Hourly output	l/h at 45 °C	1927	2612	3102	4229	5380	-	
	<b>NL index</b>		19	30	36	53	72	-	
1000	<b>ṽs</b>	<b>I/10 min</b>	1559	1673	1755	1943	2135	2306	
	Hourly output	l/h at 45 °C	2212	2898	3388	4514	5665	6694	
	<b>NL index</b>		24	33	41	59	77	94	
1500	<b>ṽs</b>	<b>I/10 min</b>	-	2388	2469	2657	2849	3020	
	Hourly output	l/h at 45 °C	-	3612	4102	5229	6380	7408	
	<b>NL index</b>		-	44	52	69	89	106	
2000	<b>ṽs</b>	<b>I/10 min</b>	-	3102	3184	3371	3563	3735	
	Hourly output	l/h at 45 °C	-	4327	4816	5943	7094	8122	
	<b>NL index</b>		-	56	64	81	102	119	
2500	<b>ṽs</b>	<b>I/10 min</b>	-	3816	3898	4086	4278	4449	
	Hourly output	l/h at 45 °C	-	5041	5531	6657	7808	8837	
	<b>NL index</b>		-	65	75	93	113	131	

**ṽs** **I/10 min** 10 min peak output at 45 °C  
**NL index** Performance figure in accordance with DIN 4708 = number of flats which can be supplied with domestic hot water when the calorifier is heated and permanently reheated with the heat generator (standard flat: 1 bath – 4 rooms – 3.5 persons)


**Hot water charging tank CombiVal E (300-2000)**

Type		(300)	(500)	(800)	(1000)	(1500)	(2000)
• Volume	l	301	475	747	968	1472	2000
• Max. operating/test pressure SVGW	bar	6/12	6/12	6/12	6/12	6/12	6/12
• Max. operating/test pressure DVGW	bar	10/13	10/13	10/13	10/13	10/13	10/13
• Max. operating temperature	°C	95	95	95	95	95	95
• Thermal insulation PU hard foam, foam-lined	mm	75	75	-	-	-	-
• Thermal insulation polyester fleece	mm	-	-	100	100	120	120
• Thermal insulation $\lambda$	W/mK	0.027	0.027	0.040	0.040	0.040	0.040
• Fire protection class		B2	B2	B2	B2	B2	B2
• Heat loss at 65 °C	W	58	75	128	139	170	190
• Transport weight	kg	97	126	205	264	400	600
• U value	W/m <sup>2</sup> K	0.290	0.303	0.381	0.362	0.339	0.325

**Hot water charging tank CombiVal C (300-2500)**

Type		(300)	(400)	(500)	(750)	(1000)	(1500)	(2000)	(2500)
• Volume	l	289	411	490	756	990	1415	1975	2450
• Max. operating/test pressure SVGW	bar	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12
• Max. operating temperature	°C	95	95	95	95	95	95	95	95
• Thermal insulation		Neodul® insulation (EPS rigid foam outside and polyester fibre fleece inside)							
	mm	100	100	100	130	130	150	150	150
• Thermal insulation $\lambda$ (EPS)	W/mK	0.0316	0.0316	0.0316	0.0316	0.0316	0.0316	0.0316	0.0316
• Fire protection class		B2	B2	B2	B2	B2	B2	B2	B2
• Heat loss at 65 °C	W	59	68	73	84	99	114	135	169
• Weight (only container)	kg	55	65	70	118	155	200	250	430
• Transport weight (incl. thermal insulation and packaging/pallet)	kg	75	90	100	165	210	260	325	510
• U value	W/m <sup>2</sup> K	0.327	0.327	0.327	0.249	0.249	0.216	0.216	0.216

**Charging module TransTherm® aqua L (1-10)**  
(Dimensions in mm)

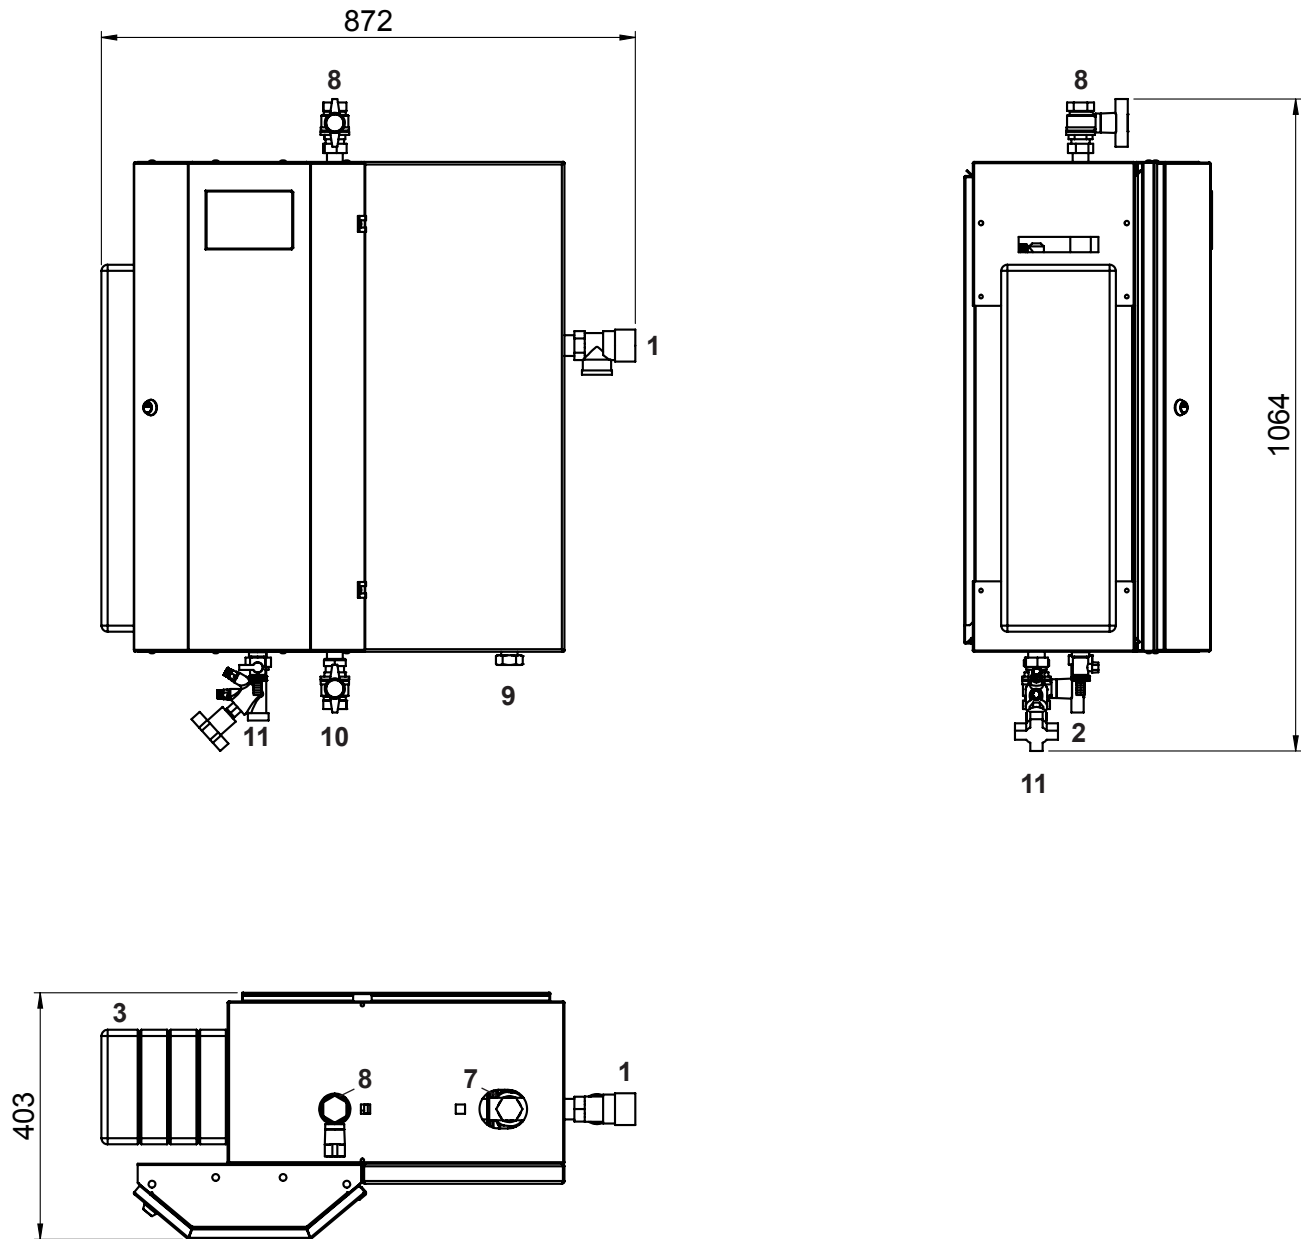




- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger

	(1-10)
7 Circulation <sup>1)</sup>	DN 25, Rp 1" (20, Rp ¾") (IT)
8 Hot water	DN 25, Rp 1" (IT)
9 Cold water	DN 20, Gp 1" (IT)
10 Flow heating water	DN 25, Rp 1" (IT)
11 Return heating water	DN 25, Gp 1" (IT)


<sup>1)</sup> Optional, connection and installation on site  
Gp = straight internal thread

TransTherm® aqua L	Weight in kg
(1-10)	56

Charging module TransTherm® aqua L (1-10)  
(Dimensions in mm)

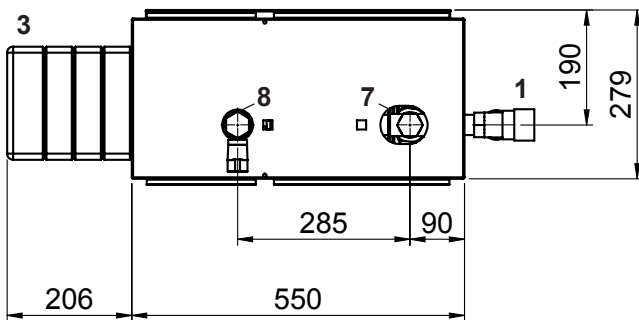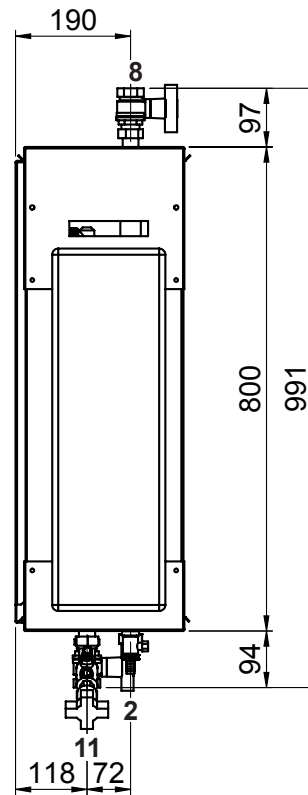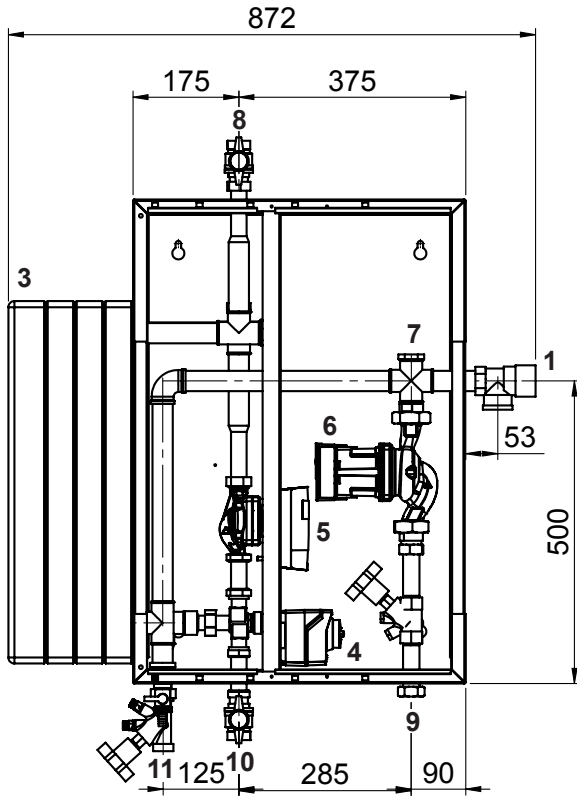

Version incl. circulation set

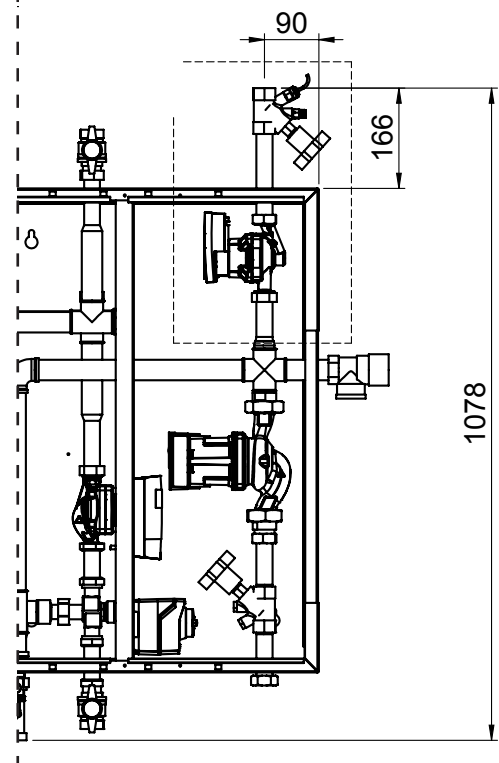

- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger
- 4 Primary three-way valve
- 5 Primary circulating pump
- 6 Secondary circulating pump


(1-10)

- |                             |                               |
|-----------------------------|-------------------------------|
| 7 Circulation <sup>1)</sup> | DN 25, Rp 1" (20, Rp ¾") (IT) |
| 8 Hot water                 | DN 25, Rp 1" (IT)             |
| 9 Cold water                | DN 20, Gp 1" (IT)             |
| 10 Flow heating water       | DN 25, Rp 1" (IT)             |
| 11 Return heating water     | DN 25, Gp 1" (IT)             |

<sup>1)</sup> Optional, connection and installation on site

Gp = straight internal thread

Charging module TransTherm® aqua L (1-16, 1-20)  
(Dimensions in mm)

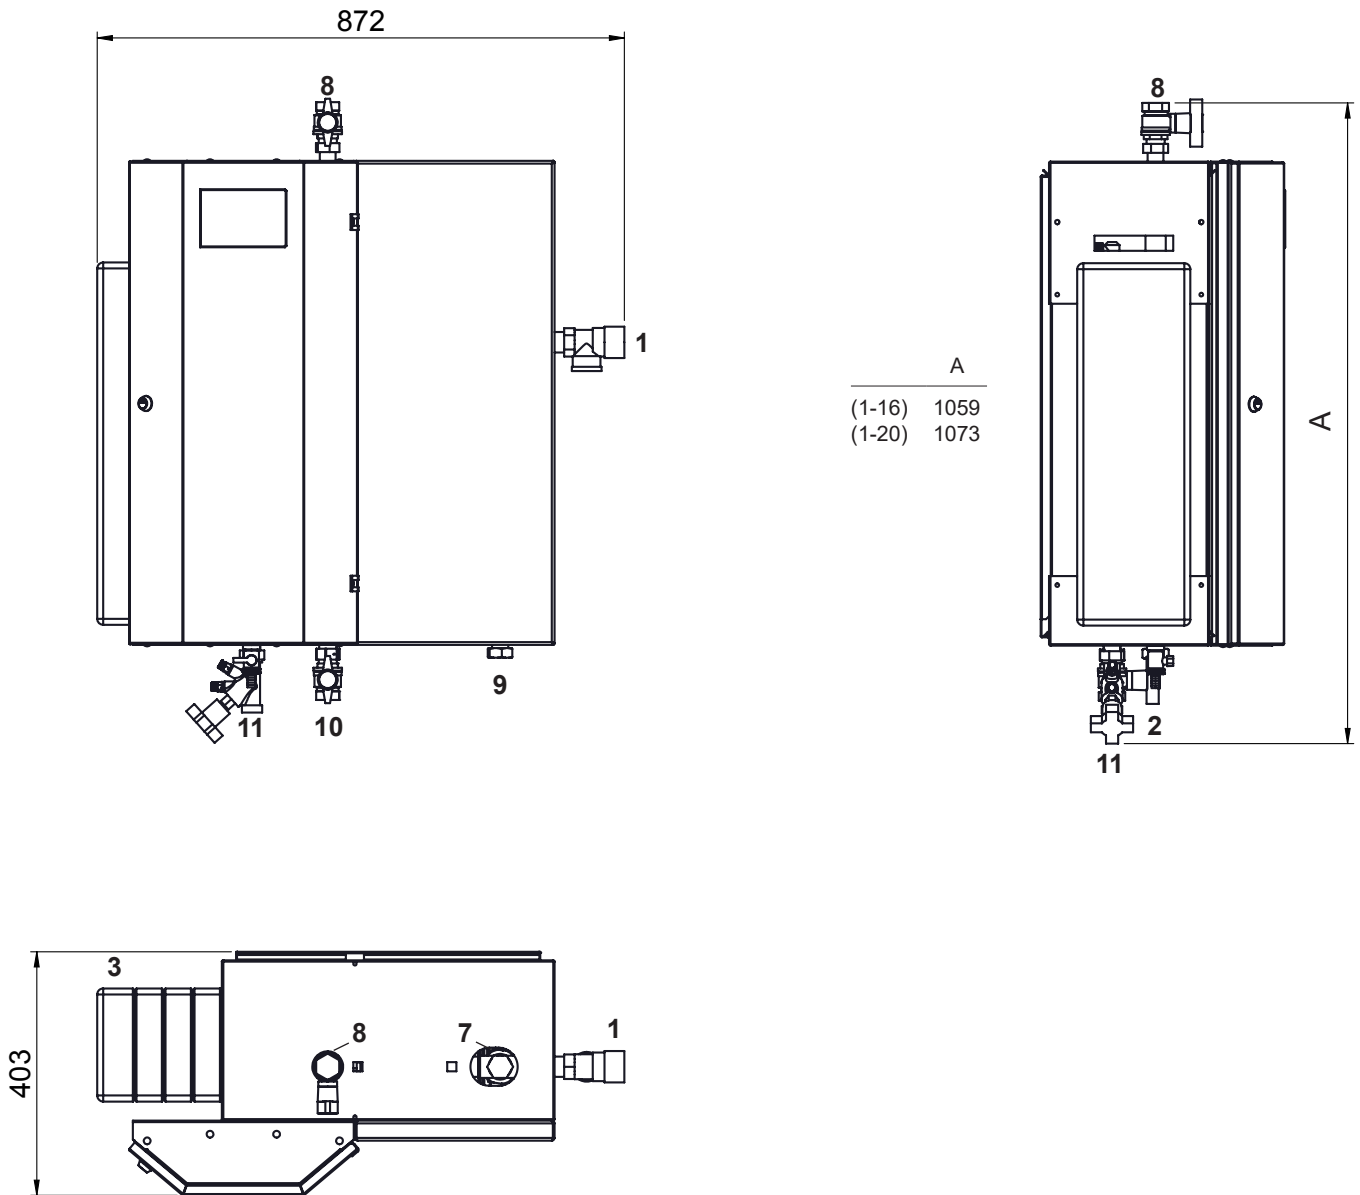

	A
(1-16)	1059
(1-20)	1073




- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger

	(1-16)	(1-20)
7 Circulation <sup>1)</sup>	DN 25, Rp 1" (20, Rp ¾")	(IT)
8 Hot water	DN 25, Rp 1" (IT)	
9 Cold water	DN 20, Gp 1" (IT)	
10 Flow heating water	DN 25, Rp 1" (IT)	
11 Return heating water	DN 25, Gp 1" (IT)	


TransTherm® aqua L	Weight in kg
(1-16)	58
(1-20)	60

<sup>1)</sup> Optional, connection and installation on site  
Gp = straight internal thread

Charging module TransTherm® aqua L (1-16, 1-20)  
(Dimensions in mm)

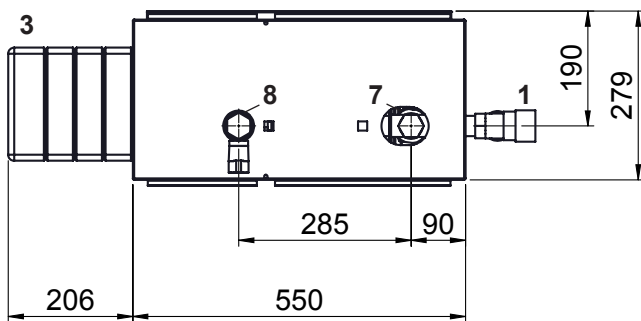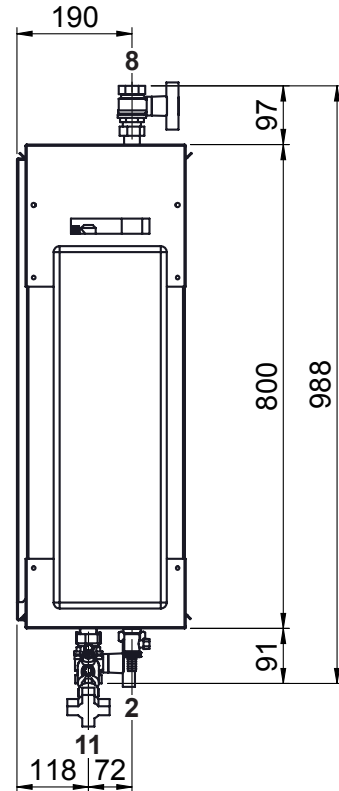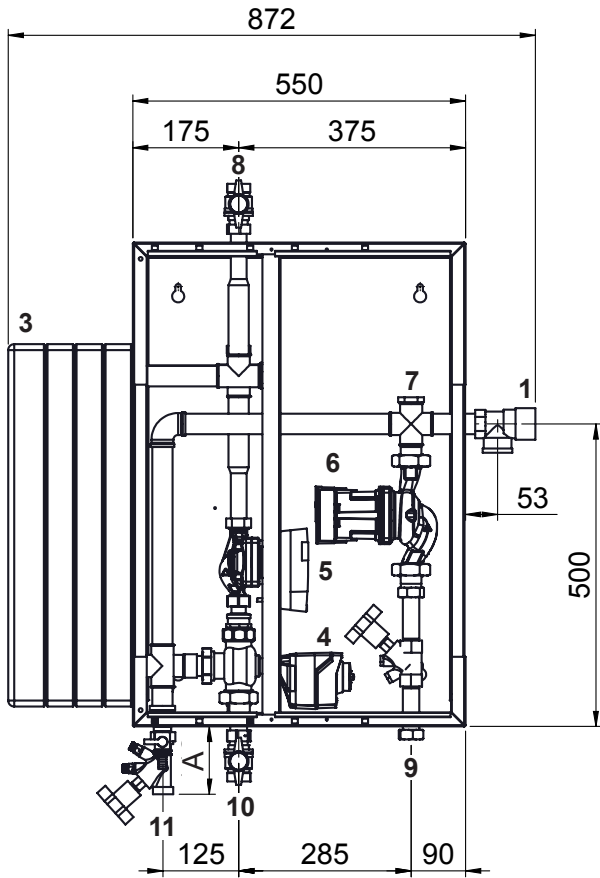

Version incl. circulation set

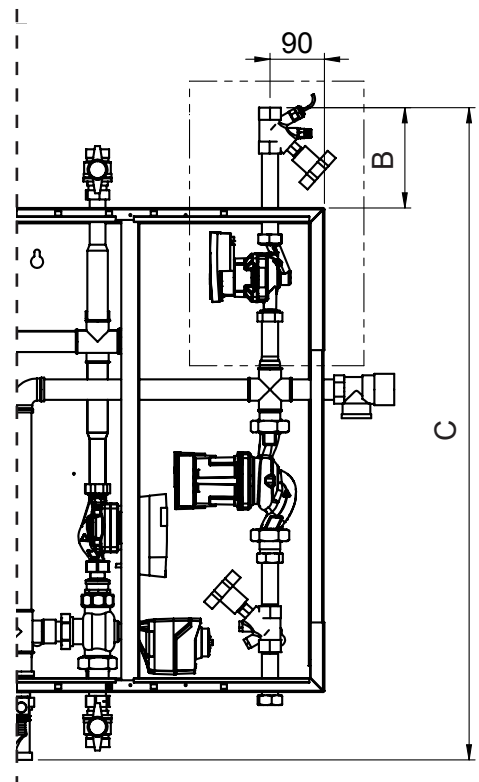

- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger
- 4 Three-way valve primary
- 5 Primary circulating pump
- 6 Secondary circulating pump




	A	B	C
(1-16)	112	166	1078
(1-20)	128	193	1121

- (1-16) (1-20)
- 7 Circulation <sup>1)</sup> DN 25, Rp 1" (20, Rp ¾") (IT)
- 8 Hot water DN 25, Rp 1" (IT)
- 9 Cold water DN 20, Gp 1" (IT)
- 10 Flow heating water DN 25, Rp 1" (IT)
- 11 Return heating water DN 25, Gp 1" (IT)

<sup>1)</sup> Optional, connection and installation on site

Gp = straight internal thread

Charging module TransTherm® aqua L (1-30 to 1-50)  
(Dimensions in mm)

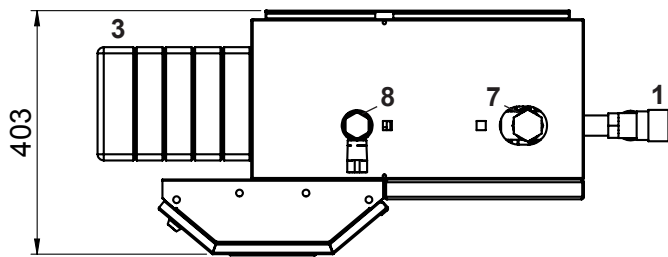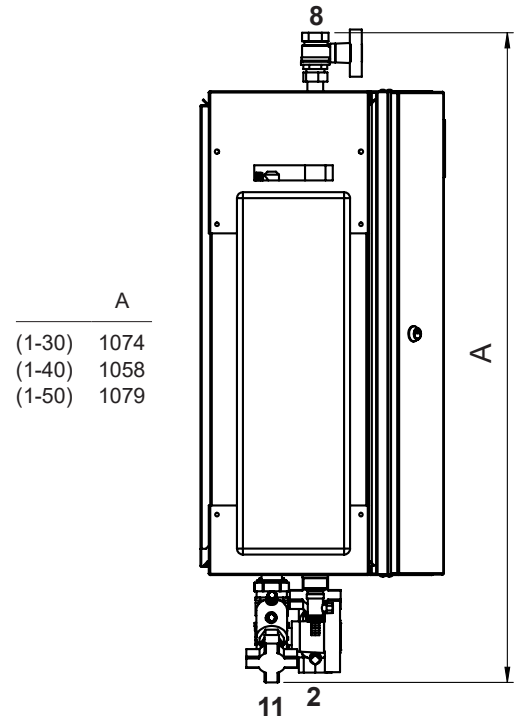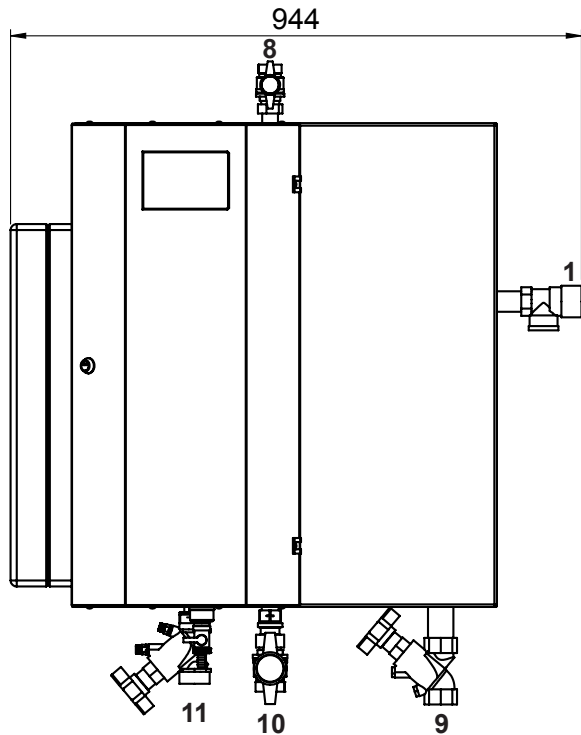




- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger

	(1-30)	(1-40)	(1-50)
7 Circulation <sup>1)</sup>	DN 32, Rp 1¼"	(25, Rp 1")	(20, Rp ¾") (IT)
8 Hot water	DN 32, Rp 1¼" (IT)		
9 Cold water	DN 32, Rp 1¼" (IT)		
10 Flow heating water	DN 32, Rp 1¼" (IT)		
11 Return heating water	DN 32, Gp 1½" (IT)		


TransTherm® aqua L	Weight in kg
(1-30)	66
(1-40)	68
(1-50)	70

<sup>1)</sup> Optional, connection and installation on site  
Gp = straight internal thread

Charging module TransTherm® aqua L (1-30 to 1-50)  
(Dimensions in mm)

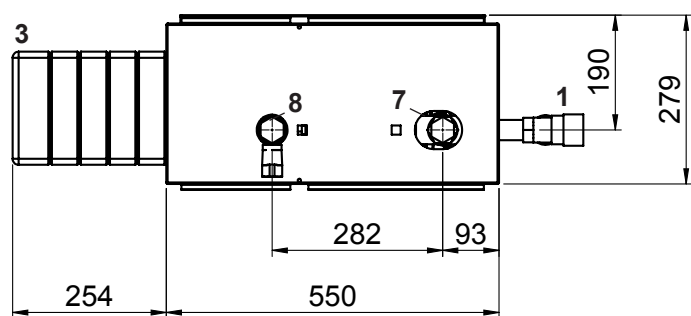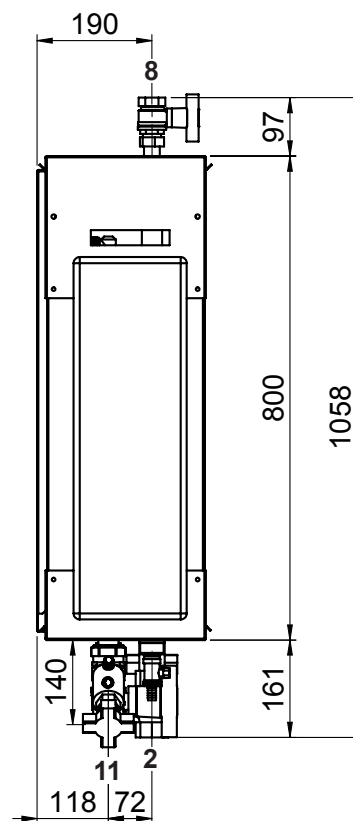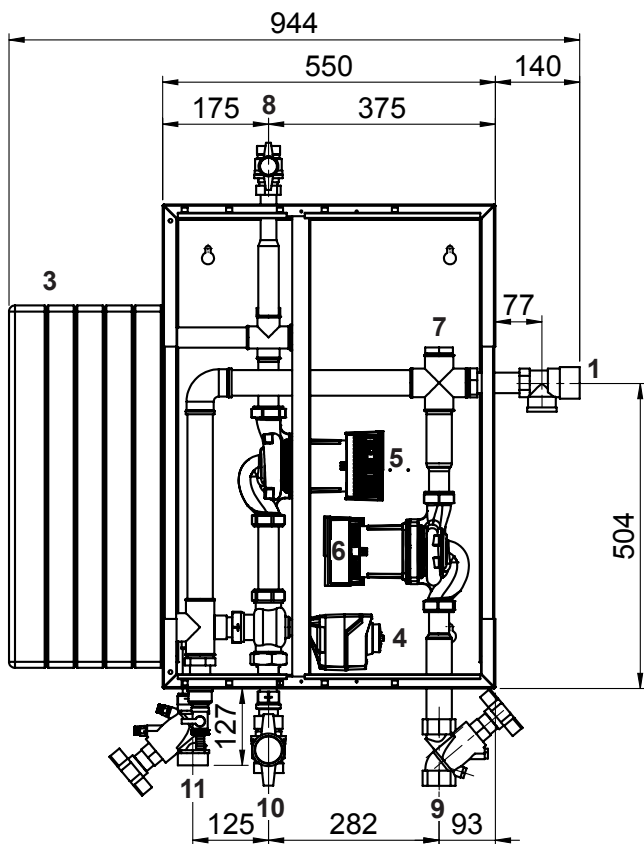

Version incl. circulation set

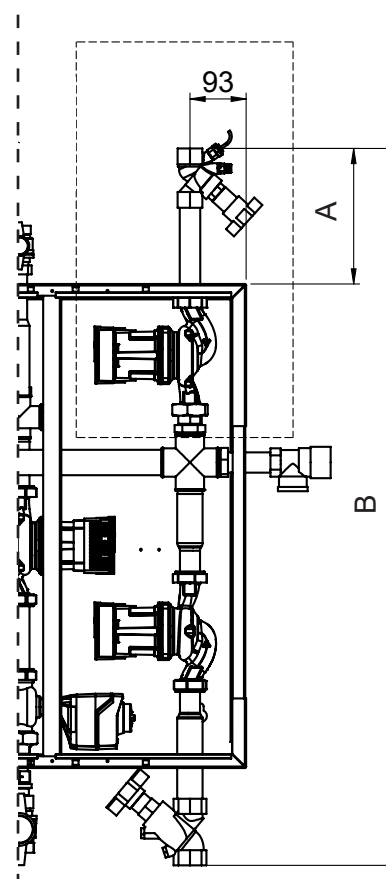


	A	B
(1-30)	224	1185
(1-40)	221	1182
(1-50)	219	1180

- |    |                            |  |        |        |
|----|----------------------------|--|--------|--------|
| 1  | Safety valve               |  |        |        |
|    | Hot water 10 bar           |  |        |        |
| 2  | Filling/drain valve        |  |        |        |
| 3  | Heat exchanger             |  |        |        |
| 4  | Primary three-way valve    |  |        |        |
| 5  | Primary circulating pump   |  |        |        |
| 6  | Secondary circulating pump |  |        |        |
|    |                            | (1-30)                                     | (1-40) | (1-50) |
| 7  | Circulation <sup>1)</sup>  | DN 32, Rp 1¼" (25, Rp 1") (20, Rp ¾") (IT) |        |        |
| 8  | Hot water                  | DN 32, Rp 1¼" (IT)                         |        |        |
| 9  | Cold water                 | DN 32, Rp 1¼" (IT)                         |        |        |
| 10 | Flow heating water         | DN 32, Rp 1¼" (IT)                         |        |        |
| 11 | Return heating water       | DN 32, Gp 1½" (IT)                         |        |        |

<sup>1)</sup> Optional, connection and installation on site

Gp = straight internal thread

Charging module TransTherm® aqua L-FW (2-10)  
(Dimensions in mm)

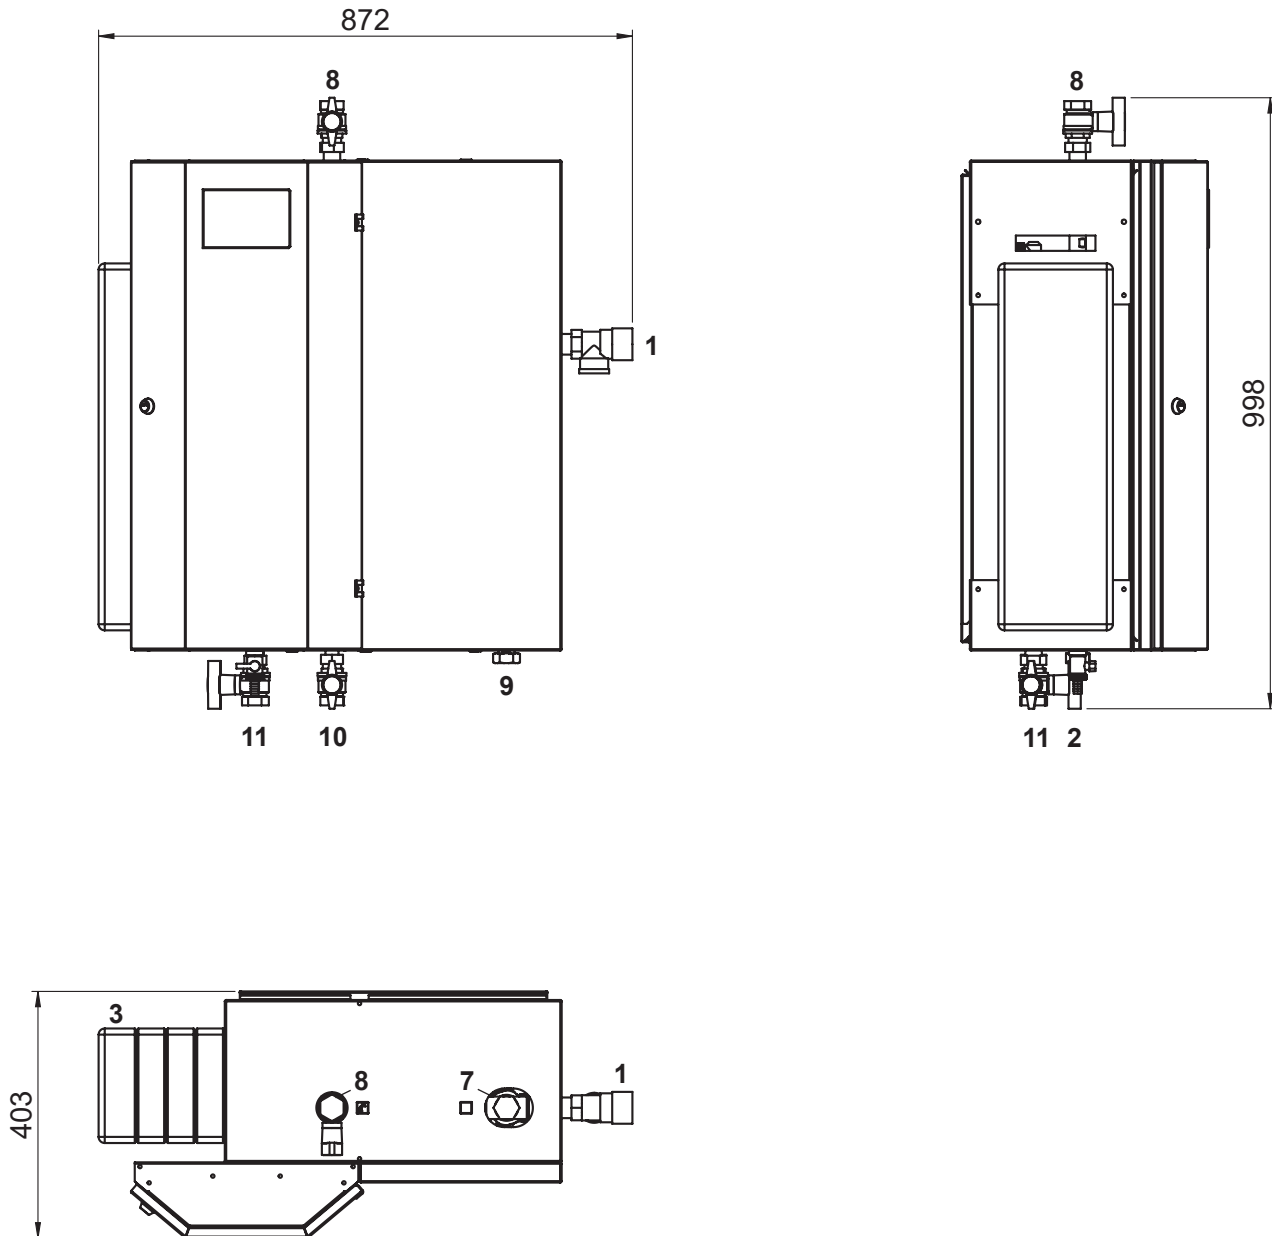




- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger

	(2-10)
7 Circulation <sup>1)</sup>	DN 25, Rp 1" (20, Rp ¾") (IT)
8 Hot water	DN 25, Rp 1" (IT)
9 Cold water	DN 20, Gp 1" (IT)
10 Flow heating water	DN 25, Rp 1" (IT)
11 Return heating water	DN 25, Gp 1" (IT)


- <sup>1)</sup> Optional, connection and installation on site
- Gp = straight internal thread

TransTherm® aqua L-FW	Weight in kg
(2-10)	56

Charging module TransTherm® aqua L-FW (2-10)  
(Dimensions in mm)

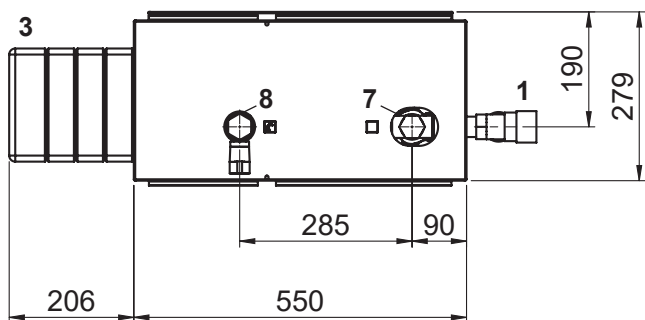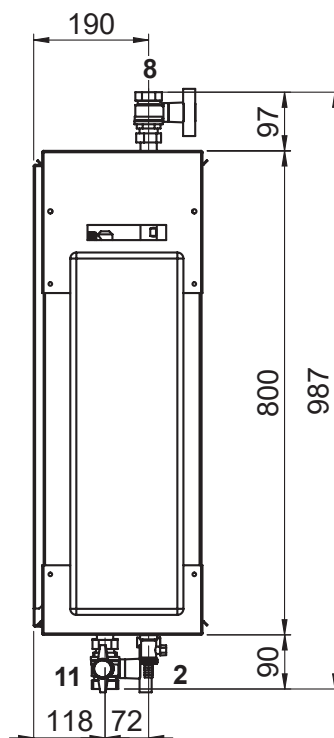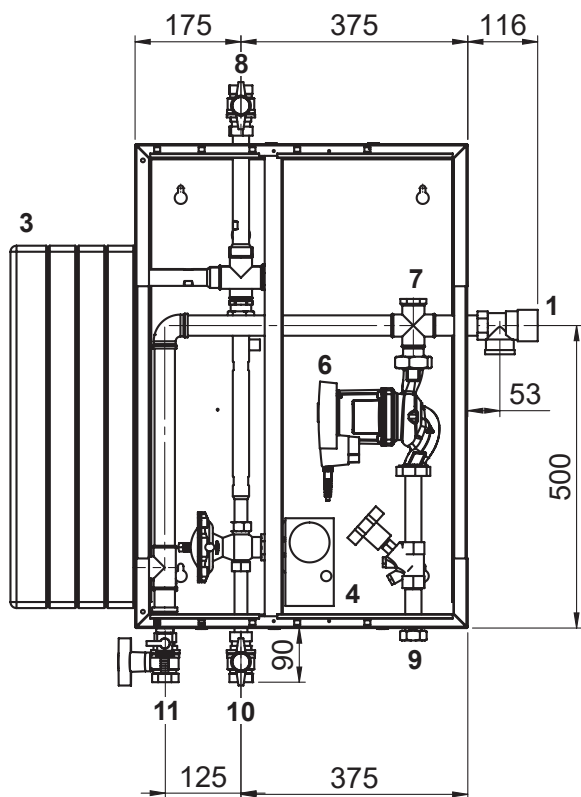

Version incl. circulation set

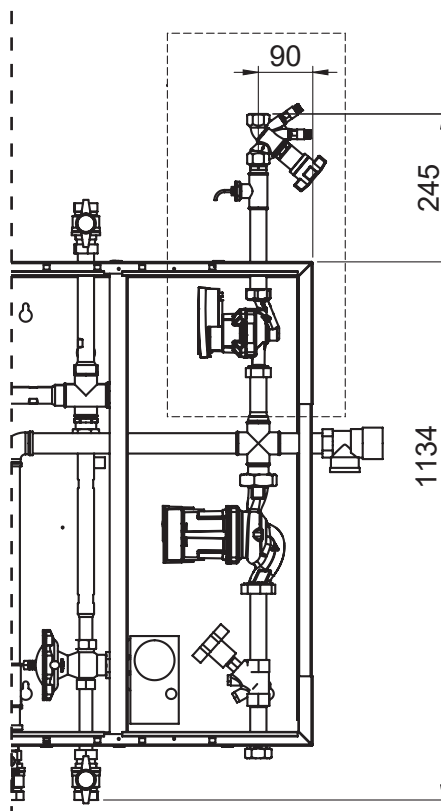

- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger
- 4 Primary three-way valve
- 5 Primary circulating pump
- 6 Secondary circulating pump


(2-10)

- |                             |                               |
|-----------------------------|-------------------------------|
| 7 Circulation <sup>1)</sup> | DN 25, Rp 1" (20, Rp ¾") (IT) |
| 8 Hot water                 | DN 25, Rp 1" (IT)             |
| 9 Cold water                | DN 20, Gp 1" (IT)             |
| 10 Flow heating water       | DN 25, Rp 1" (IT)             |
| 11 Return heating water     | DN 25, Gp 1" (IT)             |

<sup>1)</sup> Optional, connection and installation on site

Gp = straight internal thread

Charging module TransTherm® aqua L-FW (2-16, 2-20)  
(Dimensions in mm)

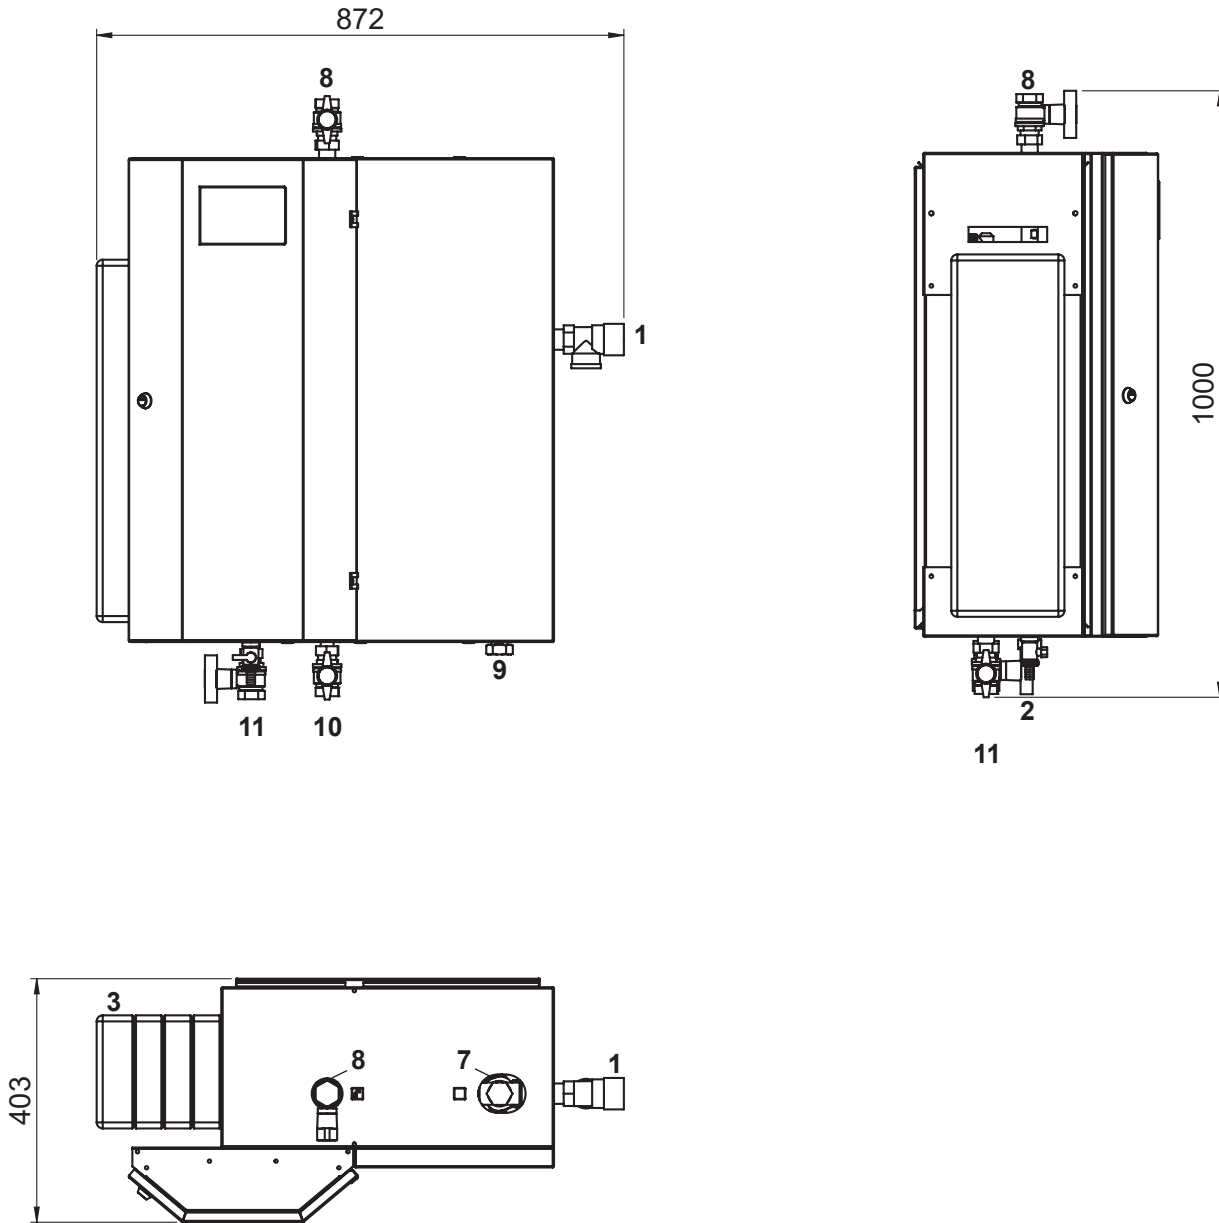




- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger

	(2-16) (2-20)
7 Circulation <sup>1)</sup>	DN 25, Rp 1" (20, Rp ¾") (IT)
8 Hot water	DN 25, Rp 1" (IT)
9 Cold water	DN 20, Gp 1" (IT)
10 Flow heating water	DN 25, Rp 1" (IT)
11 Return heating water	DN 25, Gp 1" (IT)

TransTherm® aqua L-FW	Weight in kg
(2-16)	58
(2-20)	60

<sup>1)</sup> Optional, connection and installation on site  
Gp = straight internal thread

Charging module TransTherm® aqua L-FW (2-16, 2-20)  
(Dimensions in mm)

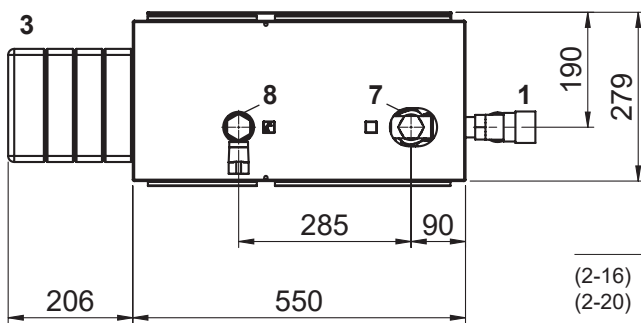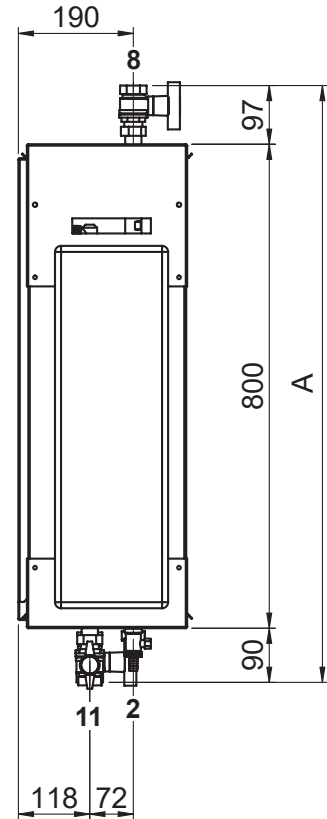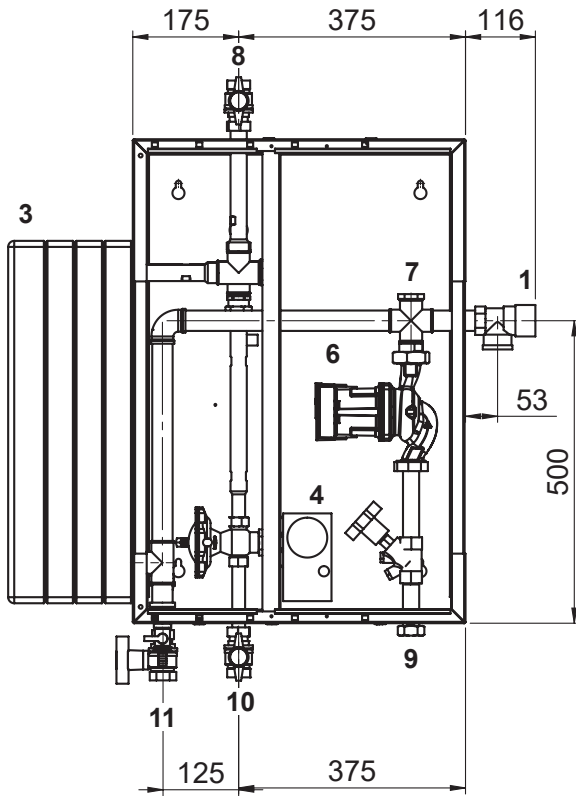

	A	B	C
(2-16)	1000	245	1134
(2-20)	987	257	1146

- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger
- 4 Three-way valve primary
- 5 Primary circulating pump
- 6 Secondary circulating pump


(2-16) (2-20)

- 7 Circulation <sup>1)</sup> DN 25, Rp 1" (20, Rp ¾") (IT)
- 8 Hot water DN 25, Rp 1" (IT)
- 9 Cold water DN 20, Gp 1" (IT)
- 10 Flow heating water DN 25, Rp 1" (IT)
- 11 Return heating water DN 25, Gp 1" (IT)


<sup>1)</sup> Optional, connection and installation on site

Gp = straight internal thread



Version incl. circulation set

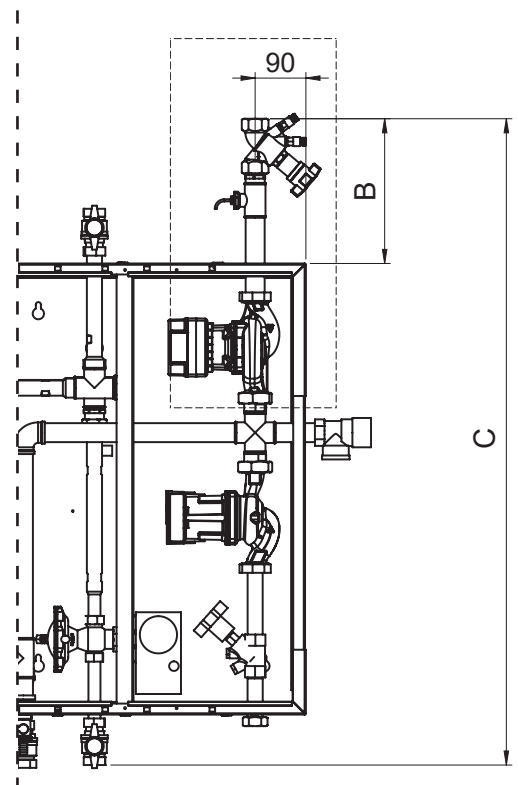

Charging module TransTherm® aqua L-FW (2-30 to 2-50)  
(Dimensions in mm)

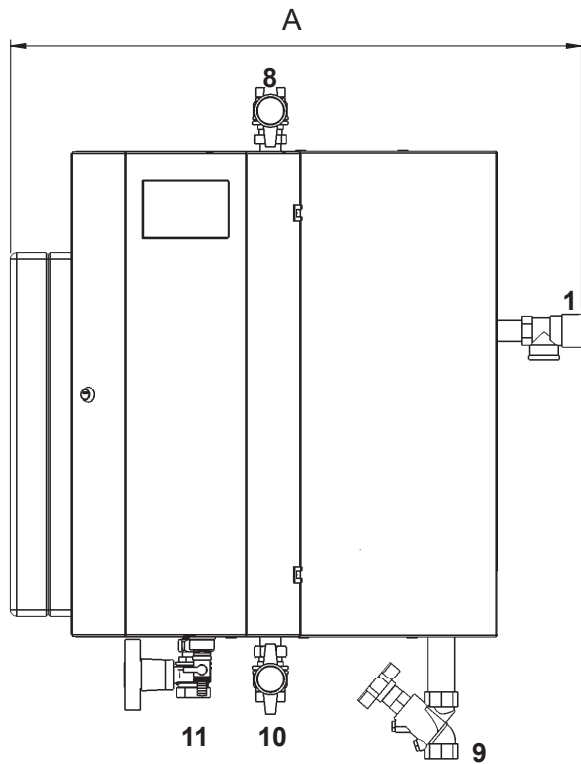

	A	B
(2-30)	943	1129
(2-40)	943	1129
(2-50)	992	1146

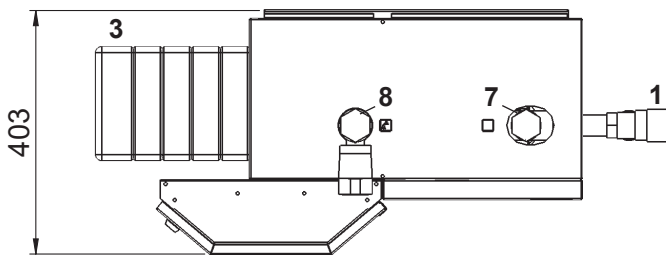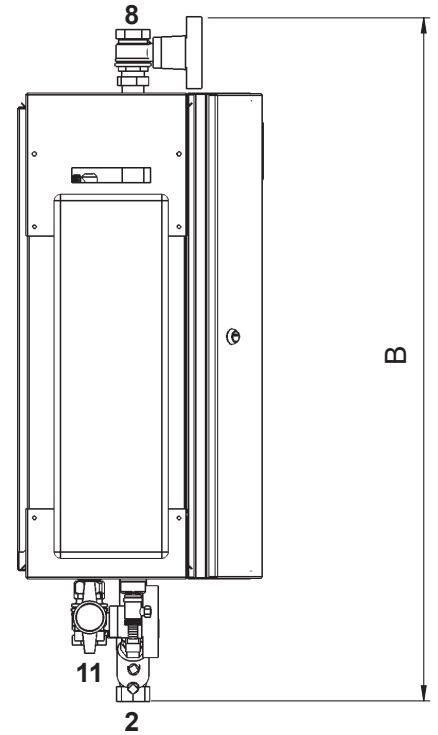

- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger


	(2-30)	(2-40)	(2-50)
7 Circulation <sup>1)</sup>	DN 32, Rp 1¼"	(25, Rp 1")	(20, Rp ¾") (IT)
8 Hot water	DN 32, Rp 1¼" (IT)		
9 Cold water	DN 32, Rp 1¼" (IT)		
10 Flow heating water	DN 32, Rp 1¼" (IT)		
11 Return heating water	DN 32, Gp 1½" (IT)		

<sup>1)</sup> Optional, connection and installation on site



Gp = straight internal thread

TransTherm® aqua L-FW	Weight in kg
(2-30)	66
(2-40)	68
(2-50)	70

Charging module TransTherm® aqua L-FW (2-30 to 2-50)  
(Dimensions in mm)

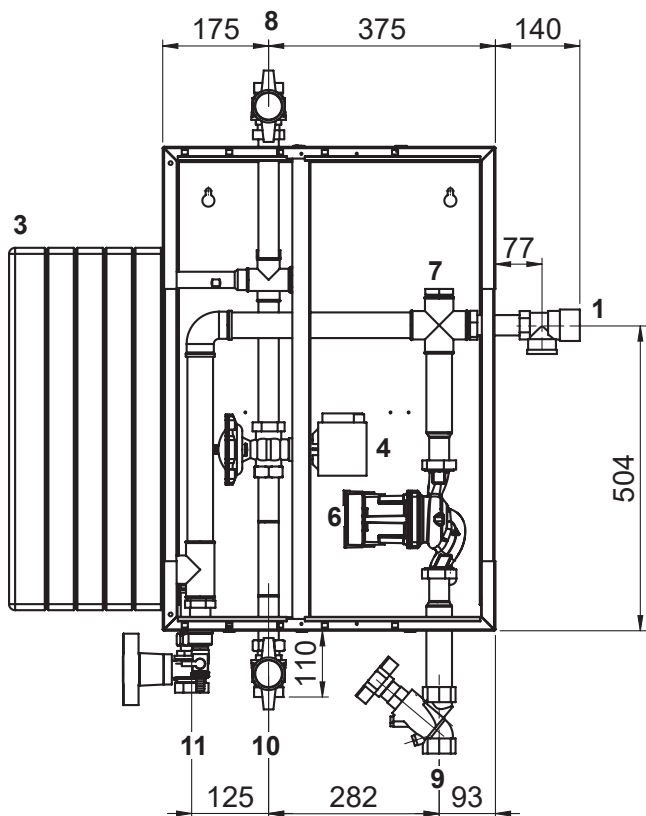

	A	B	C
(2-30)	106	1109	203
(2-40)	106	1109	203
(2-50)	97	1146	249

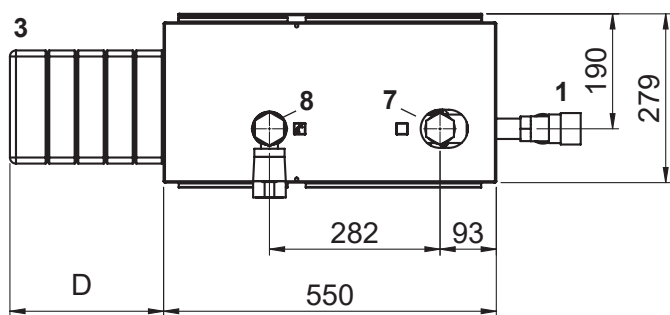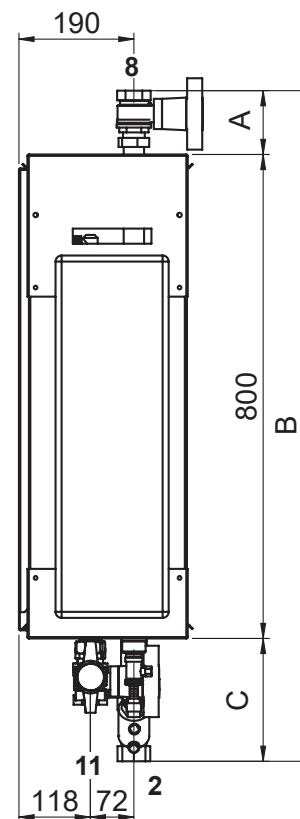

- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger
- 4 Primary three-way valve
- 5 Primary circulating pump
- 6 Secondary circulating pump


	D	E	F
(2-30)	254	287	1290
(2-40)	254	299	1302
(2-50)	302	299	1348

	(2-30)	(2-40)	(2-50)
7 Circulation <sup>1)</sup>	DN 32, Rp 1¼" (25, Rp 1") (20, Rp ¾") (IT)		
8 Hot water	DN 32, Rp 1¼" (IT)		
9 Cold water	DN 32, Rp 1¼" (IT)		
10 Flow heating water	DN 32, Rp 1¼" (IT)		
11 Return heating water	DN 32, Gp 1½" (IT)		


<sup>1)</sup> Optional, connection and installation on site

Gp = straight internal thread


Version incl. circulation set

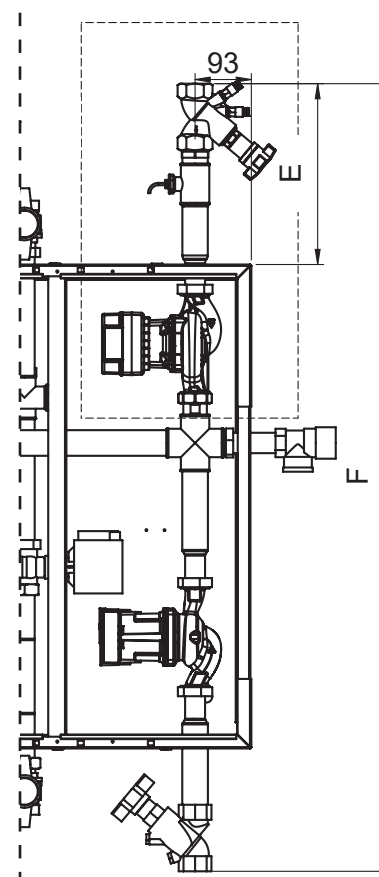

**CombiVal E (300,500)**  
(Dimensions in mm)

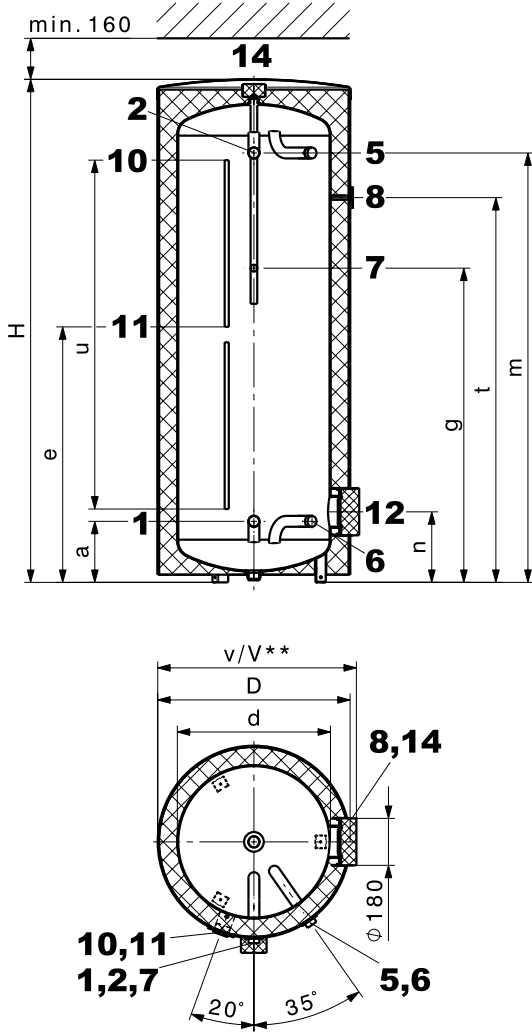

**CombiVal E (800-2000)**

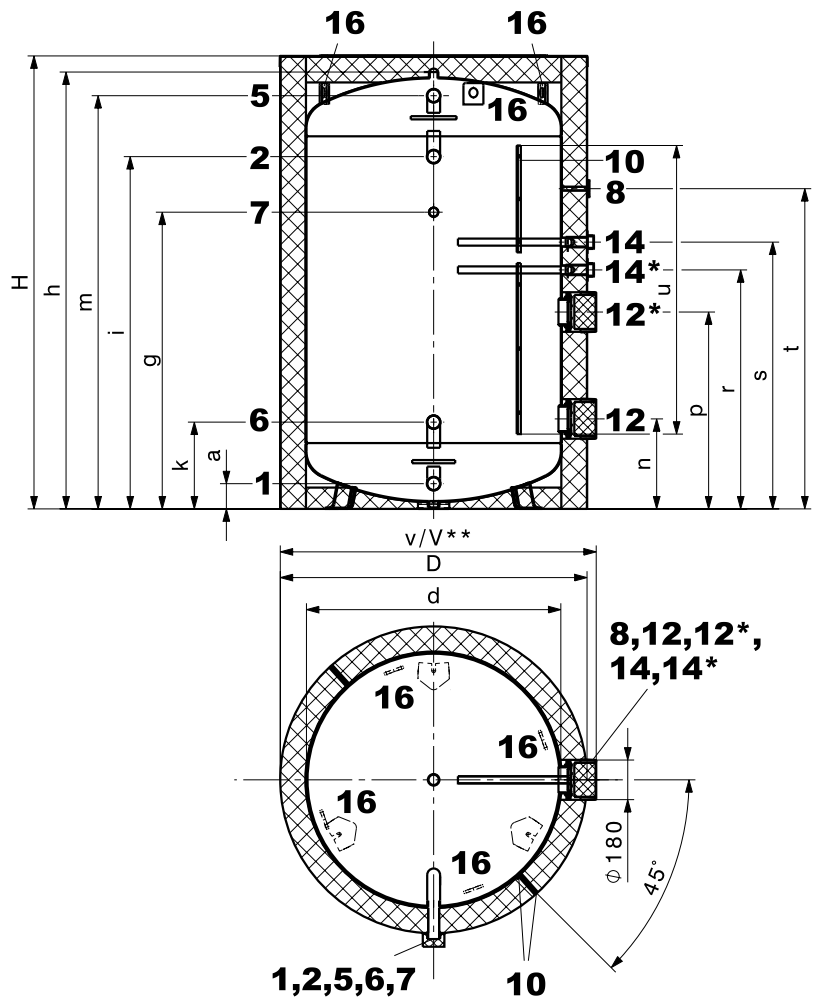

- 1 Cold water type (300,500) G 1¼" (ET)  
type (800-2000) G 2" (ET)
- 2 Domestic hot water type (300,500) G 1¼" (ET)  
type (800-2000) G 2" (ET)
- 5 Charging flow – hot type (300,500) G 1¼" (ET)  
type (800-2000) G 2" (ET)
- 6 Charging return – cold type (300,500) G 1¼" (ET)  
type (800-2000) G 2" (ET)
- 7 Circulation type (300,500) G ¾" (ET)  
(removable insulated cap type (800-2000) G 1¼" (ET)  
Ø 100 mm)


- 8 Thermometer
- 10 Sensor channel, inner Ø 11 mm type (300,500)  
Sensor terminal strip (zip fastener) type (800-2000)
- 11 Removable cap (Ø 60 mm) type (300,500)  
for positioning the sensor in the sensor channel
- 12 Hand-hole flange (flange-mounted electric heating element)  
Ø 180/120 mm, pitch circle 150 mm, 8 x M10
- 12\* **Attention:** type (800,1000) does not have a second flange
- 14 Anode sleeve type (300,500) G 1" (IT)  
type (800-2000) G 1¼" (IT)
- 14\* Anode sleeve type (1500,2000) G 1¼" (IT)
- 16 Transport strap type (800-2000)

Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm



CombiVal E type	D	d	H	h	a	k	e	g	m	n	p	r	s	t	u	v	V**	Tilting dimension
(300)	650	500	1850	-	235	-	945	1160	1584	325	-	-	-	1505	1360	745	785	1961
(500)	750	597	1960	-	238	-	996	1225	1674	275	-	-	-	1500	1360	745	785	2082
(800)	950	750	2030	1938	101	347	-	1150	1893	352	-	-	1336	1505	1400	975	1020	1960
(1000)	1050	850	2060	1968	100	355	-	1158	1910	360	-	-	1331	1500	1400	1075	1120	2000
(1500)	1240	1000	2240	2133	105	375	-	1357	2049	390	890	1167	1521	1657	1450	1265	1310	2370
(2000)	1440	1200	2150	2044	118	406	-	1388	1933	421	921	1118	1248	1498	1350	1465	1510	2350

\*\* When using a flange-mounted electric heating element

**CombiVal C (300-1000)**  
(Dimensions in mm)

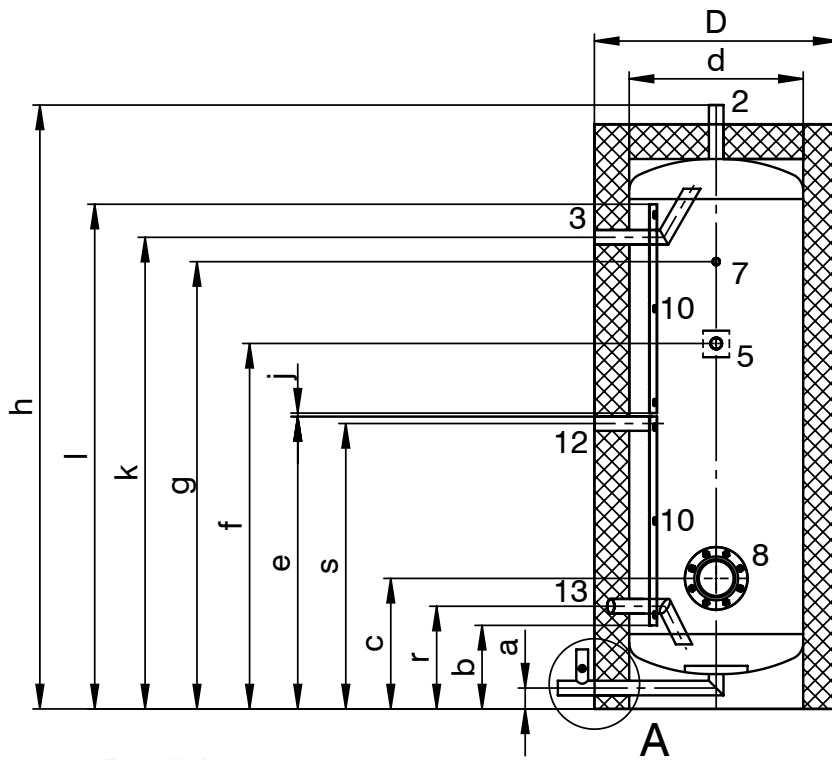

Detail A

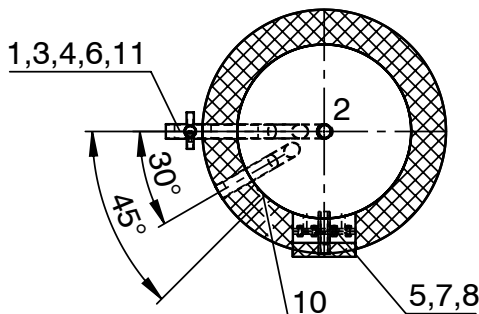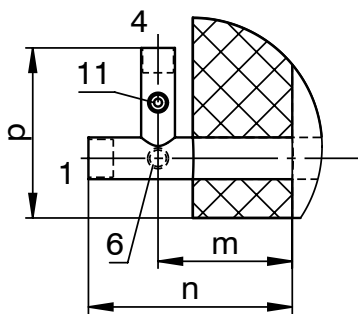


- |   |   |             |    |   |
|---|---|-------------|----|---|
| 1 | Cold water with baffle plate type (300) | Rp 1¼" (IT) | 7  | Sleeve (Rp ½" (IT)) for mountable immersion sleeve and thermometer (L = 100 mm, inner Ø = 8 mm) |
|   | type (400,500)                          | Rp 1½" (IT) | 8  | Hand-hole flange  |
|   | type (750,1000)                         | Rp 2" (IT)  |    | Ø 180/120 mm, pitch circle 150 mm, 8 x M10 or optional:   |
| 2 | Hot water                               | Rp 1¼" (IT) |    | - flange-mounted electric heating element or  |
|   | type (400,500)                          | Rp 1½" (IT) |    | - impressed current anode set with flange cover,  |
|   | type (750,1000)                         | Rp 2" (IT)  |    | 180 – 1½" (IT)  |
| 3 | Charging flow – hot                     | Rp 1" (IT)  | 10 | Sensor terminal bar 600 x 30 mm   |
|   | type (300-500)                          | Rp 1¼" (IT) |    | 2 x type (300-1000)   |
|   | type (750,1000)                         | Rp 1" (IT)  | 11 | Immersion sleeve M16 x 1.5 for sensor/thermostat  |
| 4 | Charging return – cold                  | Rp 1" (IT)  | 12 | Charging flow – MAGRO   |
|   | type (300-500)                          | Rp 1" (IT)  |    | type (300-500) Rp 1" (IT)   |
|   | type (750,1000)                         | Rp 1¼" (IT) |    | type (750,1000) Rp 1¼" (IT)   |
| 5 | Circulation with baffle plate           | Rp 1" (IT)  | 13 | Charging return – cold  |
|   | type (300-500)                          | Rp 1" (IT)  |    | type (300-500) Rp 1" (IT)   |
|   | type (750,1000)                         | Rp 1¼" (IT) |    | type (750,1000) Rp 1¼" (IT)   |
| 6 | Drain                                   | Rp ½" (IT)  |    |   |
|   | type (300-500)                          | Rp ½" (IT)  |    |   |
|   | type (750,1000)                         | Rp ¾" (IT)  |    |   |

Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm


CombiVal C

type	a	b	c	d	D	e	f	g	h	j	k	l	m	n	p	r	s	Tilting dimension
(300)	60	240	375	500	700	840	1050	1285	1680	10	1355	1450	135	205	174	295	820	1720
(400)	70	285	420	600	800	885	1095	1330	1745	10	1368	1495	135	205	187	340	850	1795
(500)	80	295	430	650	850	895	1105	1340	1765	10	1378	1505	130	190	197	350	860	1820
(750)	80	335	470	750	1010	935	1310	1590	2140	60	1674	1595	165	235	203	390	1030	2195
(1000)	80	365	500	900	1160	965	1215	1495	1945	10	1384	1575	165	235	203	420	930	2020


**CombiVal C (1500,2000)**  
(Dimensions in mm)

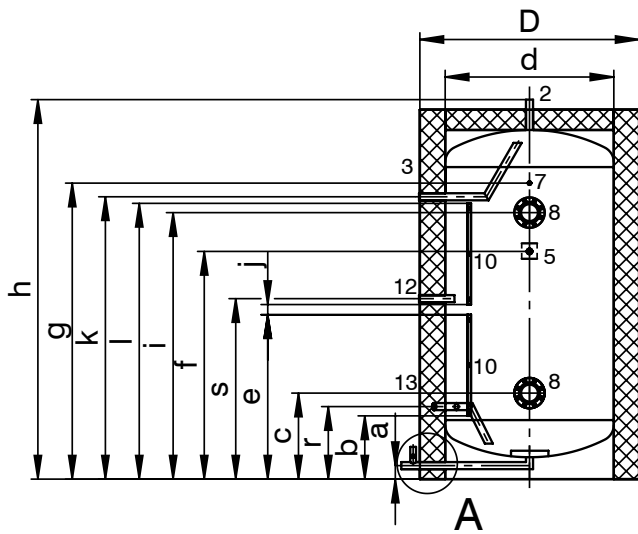


**CombiVal C (2500)**

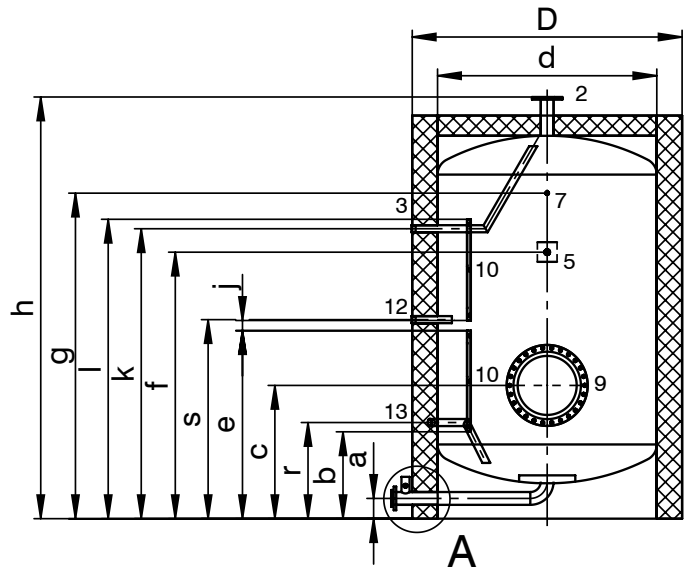

Detail A

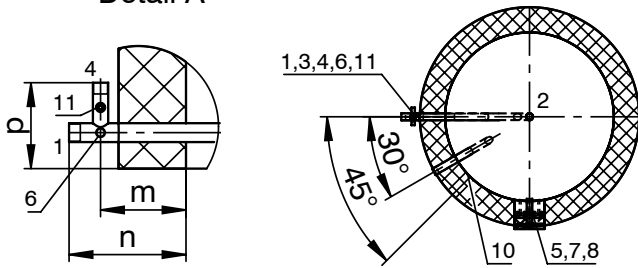

Detail A

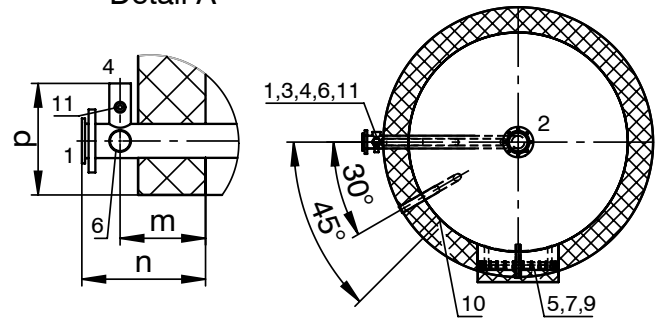

- |  |   |  |
|--|---|--|
| <p>1 Cold water with baffle plate<br/>2 Hot water<br/>3 Charging flow – hot<br/>4 Charging return – cold<br/>5 Circulation with baffle plate<br/>6 Drain<br/>7 Sleeve (Rp ½" (IT)) for mountable immersion sleeve and thermometer (L = 100 mm, inner Ø = 8 mm)<br/>8 Hand-hole flange<br/>Ø 180/120 mm, pitch circle 150 mm, 8 x M10 or optional:<br/>- flange-mounted electric heating element or<br/>- impressed current anode set with flange cover, 180 – 1½" (IT)</p> | <p>type (1500,2000) Rp 2" (IT)<br/>type (2500) DN 65/PN 10<br/>type (1500,2000) Rp 2" (IT)<br/>type (2500) DN 65/PN 10<br/>type (1500-2000) Rp 1½" (IT)<br/>type (1500-2000) Rp 1½" (IT)<br/>type (1500-2000) Rp 1½" (IT)<br/>type (1500-2000) Rp ¾" (IT)<br/>type (1500-2000) Rp 1½" (IT)<br/>type (1500-2000) Rp 1½" (IT)<br/>type (1500-2000) Rp 1½" (IT)<br/>type (1500-2000) Rp 1½" (IT)</p> | <p>9 Manhole flange<br/>Ø 400/480 mm, pitch circle 445 mm, 26 x M14 or optional<br/>Flange adapter:<br/>- for electric heating element or<br/>- for impressed current anode set with flange cover, 180 – 1½" (IT)<br/>10 Sensor terminal bar 600 x 30 mm<br/>2 x type (1500-2500)<br/>11 Immersion sleeve M16 x 1.5 for sensor/thermostat<br/>12 Charging flow – MAGRO type (1500-2000) Rp 1½" (IT)<br/>13 Charging return – cold type (1500-2000) Rp 1½" (IT)</p> |
|--|---|--|


Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm

CombiVal C type	a	b	c	d	D	e	f	g	h	i	j	k	l	m	n	p	r	s	Tilting dimension
(1500)	80	375	510	1000	1300	975	1350	1755	2250	1580	60	1674	1635	165	260	203	430	1070	2330
(2000)	80	405	530	1100	1400	1005	1580	2035	2555	1860	165	1909	1770	165	260	191	460	1230	2635
(2500)	120	515	790	1300	1600	1115	1580	1930	2500	-	60	1719	1775	190	275	248	570	1180	2620

**Water heating**

TransTherm® aqua L

- Circulation via storage tank
- Storage tank charging system

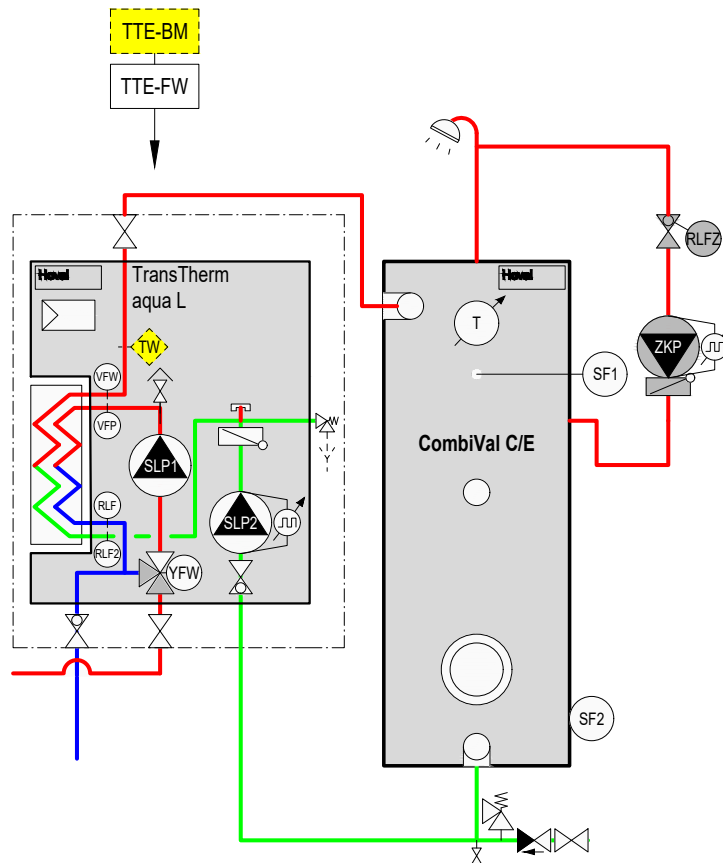

- TTE-FW Basic module district heating/fresh water
- TW Flow temperature monitor (if required)
- VFP Primary flow sensor
- VFW Flow sensor domestic hot water
- RLF Primary return sensor
- RLF2 Return sensor domestic cold water
- SF1 Calorifier sensor 1
- SF2 Calorifier sensor 2
- RLFZ Circulation sensor
- SLP1 Calorifier charging pump primary
- SLP2 Calorifier charging pump secondary
- YFW Flow rate sender with through valve and safety function
- ZKP Recirculation pump

*Option*  
BM TopTronic® E control module


**Notice**

A safety valve (6 bar) must be installed in the cold water line. The loading module is already protected with a safety valve (10 bar).

### Water heating

TransTherm® aqua L-FW

- Circulation via storage tank
- Storage tank charging system

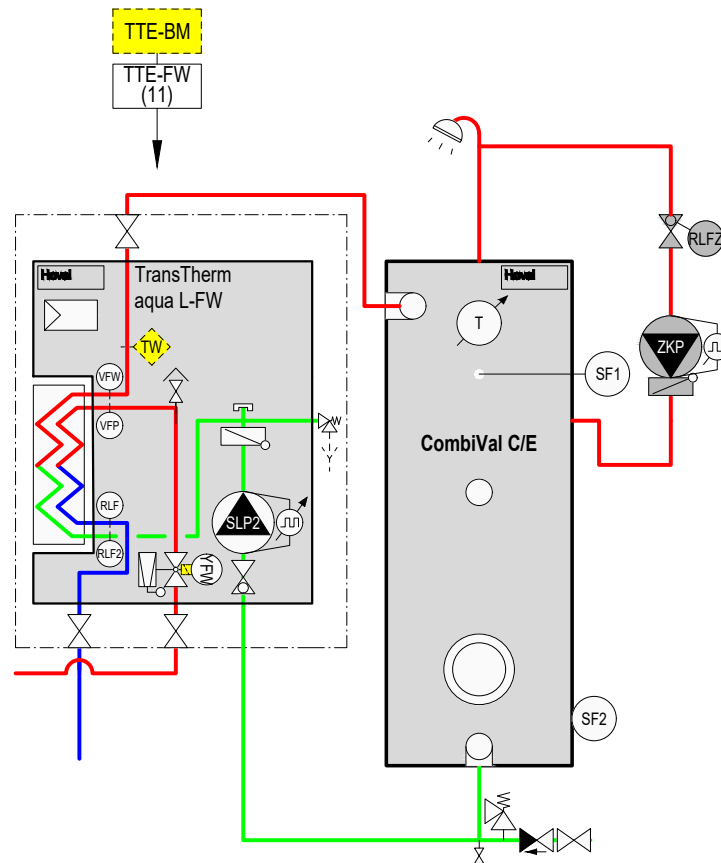

TTE-FW	Basic module district heating/fresh water
TW	Flow temperature monitor (if required)
VFP	Primary flow sensor
VFW	Flow sensor domestic hot water
RLF	Primary return sensor
RLF2	Return sensor domestic cold water
SF1	Calorifier sensor 1
SF2	Calorifier sensor 2
RLFZ	Circulation sensor
SLP1	Calorifier charging pump primary
SLP2	Calorifier charging pump secondary
YFW	Flow rate sender with through valve and safety function
ZKP	Recirculation pump

*Option*

BM TopTronic® E control module

**Notice**

A safety valve (6 bar) must be installed in the cold water line. The loading module is already protected with a safety valve (10 bar).

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval TransTherm® aqua

Calorifier continuous flow system

TransTherm® aqua F (6-10)-(6-50)





**Table of contents**

■ Description	5
■ Part numbers	6
■ Technical data	10
■ Dimensions	17
■ Example	21



## Calorifier continuous flow system

Consisting of:

- fresh water module TransTherm® aqua F
- buffer storage tank (option)

## Fresh water module TransTherm® aqua F

- Fully installed station with plate heat exchanger for the provision of domestic hot water using the continuous flow principle
- Intended for wall installation
- The primary side (heating side) contains the three-way valve, high-efficiency pump, ventilation, filling/drain valve and balancing valve. These components ensure a constant flow temperature at the plate heat exchanger. Pipes made from steel
- The secondary side (DHW side) contains the safety valve (10 bar), non-return valve and a filling/drain valve. A flow sensor ensures the correct hot water temperature. Pipes made from stainless steel
- Stainless steel plate heat exchanger 1.4404, copper-soldered or copper-free
- EPP insulation, 30 mm, for the heat exchanger
- Flow sensor
- Switch-on and switch-off of the charging pump is regulated via two sensors (included in the scope of delivery) in the storage tank
- Mount tank sensor on the tank on site and connect it to the controller
- T-piece with dummy plug for on-site connection of the circulation group. Connect the pump to the controller on site.
- TopTronic® E control with integrated thermal disinfection of the DHW storage tank (anti-legionella circuit)



### Range

Fresh water module

TransTherm® aqua F type	Output kW
(6-10)	50
(6-16)	90
(6-20)	115
(6-30)	175
(6-40)	230
(6-50)	275

### Delivery

- The buffer storage tank required is not included in the scope of delivery

### On site

- Installation of a circulation unit; the necessary connection is provided
- Electrical connection of the controller

### TopTronic® E controller

#### TopTronic® E basic module district heating/fresh water

- Control unit for controlling district heating transfer stations in non-communicative networks and the corresponding consumers with integrated control functions for
  - primary valve control
  - cascade management
  - 1 heating/cooling circuit with mixer
  - 1 heating/cooling circuit without mixer
  - 1 hot water charging circuit
  - various additional functions
- Various functions for hot water:
  - selection of different basic programs (week programs, economy mode, holiday until, etc.)
  - various operating modes (e.g. accumulator priority or parallel mode)
  - buffer storage circuit on the primary or secondary side
  - adjustable loading criteria (e.g. adjustable loading times, undershooting the minimum nominal value, etc.)

- adjustable switch-off criteria (e.g. achieving the setpoint valve, achieving the lower sensor setpoint value, etc.)
- adjustable loading block (if the loading flow temperature is too low, the setpoint temperature is not reached, differential temperature-dependent solar circuit control)
- Definable switching times for recirculation pump control
- Outdoor sensor
- Immersion sensor (calorifier sensor)
- Contact sensor (flow temperature sensor)
- Complete plug set for DH module
- speed-controlled pumps

**No further module expansions or controller modules can be installed in the control panel!**

### Option

#### TopTronic® E control module

- Simple, intuitive operating concept
- Display of the most important operating states
- Configurable start screen
- Operating mode selection
- Configurable day and week programs
- Operation of all connected Hoval CAN bus modules
- Commissioning wizard
- Service and maintenance function
- Fault message management
- Analysis function
- Weather display (with HovalConnect option)

- Adaptation of the heating strategy based on the weather forecast (with HovalConnect option)

### Notice

The TopTronic® E control module for operating the basic module district heating/fresh water must be ordered separately!

**Further information about the TopTronic® E** see "Controls"

### Delivery

- All armatures required for operation, such as flow balancing and shut-off valves, backflow preventer, air-bleeding and drain valve are fitted.

### Caution

As a result of thermal disinfection of the domestic hot water for legionella protection, increased water temperatures (at least 65 ... 70 °C) occur. Depending on the water quality, this may result in increased calcification at the installed armatures and heat exchangers and also brings the risk of scalding at the tapping points. Corresponding protective measures must be implemented on site.

### Hot water connection for application according to the SVGW (Swiss association for electricity, gas, district heating and water)

The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

**Fresh water module**



**TransTherm® aqua F**

Fully assembled station with plate heat exchanger for the provision of domestic hot water using the continuous flow principle and built-in Hoval TopTronic® E control

The required buffer storage tank is not supplied.

TransTherm® aqua F	Output kW
(6-10)	50
(6-16)	90
(6-20)	115
(6-30)	175
(6-40)	230
(6-50)	275

**Authorisation number**

TransTherm® aqua F (6-10)-(6-50)  
 SVGW test number 2407-7331

**Version with copper-free heat exchanger**

**TransTherm® aqua F**


with copper-free heat exchanger

TransTherm® aqua F	Output kW
(6-10)	50
(6-16)	90
(6-20)	115
(6-30)	175
(6-40)	230
(6-50)	275

**Part No.**

	8006 387
	8006 388
	8006 389
	8006 390
	8006 391
	8006 392
	8006 521
	8006 522
	8006 523
	8006 524
	8006 525
	8006 526

Accessories



**TopTronic® E control module black with 4.3" colour touchscreen**

For operation of all controller modules connected to the bus system (basic, solar, buffer modules etc.)  
 Connection to the Hoval bus system via RJ45 plug connection or via plug terminals (max. 0.75 mm<sup>2</sup>), flat design with flexible installation option

Installation:

- in control panel of the heat generator
- in the Hoval wall casing
- in the control panel front, black high-gloss cover, customer-specific configurable start screen,

Display of current weather or weather forecast (only possible in combination with HovalConnect)

Consisting of:

- TopTronic® E control module black
- Clamping device set control module
- RJ45-RAST 5 CAN cable, L = 500



**Return changeover valve set**

Consisting of:

- temperature sensor
- changeover valve
- drive (8 sec.) DN 20-40
- drive (30 sec.) DN 50-80
- seals
- screw connections

Nominal diameter	Output kW	k <sub>vs</sub> m <sup>3</sup> /h
DN 20	50-90	6.3
DN 25	115-175	10
DN 32	230-275	16
DN 40	350	25
DN 50	450	40
DN 65	580	63
DN 80	700	100

6043 844

7010 832  
 7010 836  
 7011 009  
 7011 025  
 7016 331  
 7016 332  
 7016 333

**Notice**

When using a circulation set (also on-site recirculation pump), it is imperative to install a return switching valve set.



**Circulation set**

for TransTherm® aqua L, L-FW, F  
 Piping of parts in contact with domestic water in stainless steel and gunmetal

Consisting of:

- temperature sensor PT1000
- recirculation pump Wilo Yonos PARA
- recirculation pump Wilo Para MAXO
- regulating valve
- non-return valve

Connection	Flow rate m <sup>3</sup> /h	Recirculation pump
DN 20 ¾" Rp	1.9	Z15/7.0 RKC
DN 25 1" Rp	3.4	Z25/180/08/F02
DN 32 1¼" Rp	5.8	Z25/180/08/F02

8005 279  
 8005 280  
 8005 281

**Part No.**



**Test valve DN 8 G 1/4"**  
 for TransTherm® aqua L, L-FW, F, FS  
 Test valve suitable for flame treatment  
 for hygienic-microbiologic  
 tests.

2049 861



**Sludge separator DM with magnet**  
 made of technopolymer (PO) or  
 brass with insulation (MS)

Type	Connection inches	Flow rate at 1.2 m/s flow speed m³/h	k <sub>v</sub> value m³/h
DM PO	Rp 1"	1.3	10.5
DM PO	Rp 1 1/4"	2.1	10.5
DM MS	Rp 1 1/2"	5.4	63.2
DM MS	Rp 2"	8.2	70.0

2054 376  
 2085 523  
 2085 527  
 2085 528

**Additional sludge separators**  
 see "Various system components"



**Insulation for sludge separator  
 DM PO 1"**  
 10 mm insulating caps made of PE-X foam  
 Thermal conductivity 0.035 W/mK  
 Fire resistance (DIN 4102): class B2

2085 524



**Insulation for sludge separator  
 DM PO 1 1/4"**  
 10 mm insulating caps made of PE-X foam  
 Thermal conductivity 0.035 W/mK  
 Fire resistance (DIN 4102): class B2

2086 031

Part No.



**Temperature monitor 0 ... 120 °C**  
for TransTherm® aqua L, L-FW, F, FS

2048 299



**Safety temperature monitor 70 ... 130 °C**  
for TransTherm® aqua L, L-FW, F, FS

2048 300



**Safety temperature limiter 70 ... 130 °C**  
for TransTherm® aqua L, L-FW, F, FS

2049 619



**Immersion sleeve G 1/2" stainless steel for thermostat**  
for TransTherm® aqua L, L-FW, F, FS  
Installation length = 100 mm  
Outer Ø: 8 mm, inner Ø: 6.5 mm

2048 285



**Immersion sleeve G 1/2" stainless steel for 2 thermostats**  
for TransTherm® aqua L, L-FW, F, FS  
Installation length = 100 mm  
Outer Ø: 15 mm, inner Ø: 13.5 mm

2048 288

Services



**Services and associated scope of services**  
see separate catalogue "Hoval Services"

Commissioning by Hoval customer service is a prerequisite for warranty/guarantee activation.

Performance data

TransTherm® aqua F (6-10 to 6-50)

Domestic water secondary		TransTherm® aqua F		Flow temperature heating water											
				55 °C (6-...)						60 °C (6-...)					
				(10)	(16)	(20)	(30)	(40)	(50)	(10)	(16)	(20)	(30)	(40)	(50)
60/5 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
60/10 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
60/15 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
60/20 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
55/5 °C	T return primary	°C	-	-	-	-	-	-	-	30	30	30	30	30	30
	Ṽ primary	m³/h	-	-	-	-	-	-	-	1.25	2.04	2.51	3.71	4.76	5.66
	Q max.	kW	-	-	-	-	-	-	-	43	70	86	127	163	194
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	0.74	1.2	1.48	2.18	2.8	3.33
55/10 °C	T return primary	°C	-	-	-	-	-	-	-	30	30	30	30	30	30
	Ṽ primary	m³/h	-	-	-	-	-	-	-	1.11	2.04	2.51	3.71	4.76	5.63
	Q max.	kW	-	-	-	-	-	-	-	38	70	86	127	163	193
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	0.73	1.34	1.64	2.43	3.12	3.69
55/15 °C	T return primary	°C	-	-	-	-	-	-	-	30	30	30	30	30	30
	Ṽ primary	m³/h	-	-	-	-	-	-	-	0.76	1.46	1.95	3.06	4.23	5.4
	Q max.	kW	-	-	-	-	-	-	-	26	50	67	105	145	185
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	0.56	1.08	1.44	2.26	3.12	3.98
55/20 °C	T return primary	°C	-	-	-	-	-	-	-	30	30	30	30	30	30
	Ṽ primary	m³/h	-	-	-	-	-	-	-	0.47	0.9	1.17	1.9	2.63	3.36
	Q max.	kW	-	-	-	-	-	-	-	16	31	40	65	90	115
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	0.39	0.76	0.99	1.6	2.22	2.83
50/5 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	1.29	2.03	2.51	3.67	4.72	5.66	1.28	2.04	2.51	3.71	4.76	5.63	
	Q max.	kW	37	58	72	105	135	162	44	70	86	127	163	193	
	Ṽ secondary	m³/h	0.71	1.11	1.37	2	2.58	3.09	0.84	1.34	1.64	2.43	3.12	3.69	
50/10 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	1.29	2.03	2.51	3.67	4.72	5.66	1.28	2.04	2.51	3.73	4.81	5.69	
	Q max.	kW	38	58	72	105	135	162	44	70	86	128	165	195	
	Ṽ secondary	m³/h	0.82	1.25	1.77	2.26	2.9	3.48	0.95	1.51	1.85	2.75	3.55	4.19	
50/15 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	1.29	2.03	2.51	3.67	4.72	5.66	1.11	1.95	2.48	3.76	4.76	5.69	
	Q max.	kW	37	58	72	105	135	162	38	67	85	129	163	195	
	Ṽ secondary	m³/h	0.91	1.43	1.77	2.58	3.32	3.99	0.94	1.65	2.09	3.18	4.01	4.8	
50/20 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	1.15	2.03	2.55	3.7	4.75	5.69	0.96	1.69	2.13	3.24	3.63	5.16	
	Q max.	kW	33	58	73	106	136	163	33	58	73	111	145	177	
	Ṽ secondary	m³/h	0.95	1.67	2.1	3.05	3.91	4.69	0.95	1.67	2.1	3.19	4.17	5.09	
45/5 °C	T return primary	°C	19	18	18	18	18	17	17	16	16	16	16	15	
	Ṽ primary	m³/h	0.86	1.91	2.9	2.9	3.8	4.61	0.86	1.92	2.91	2.91	3.82	4.63	
	Q max.	kW	35	80	123	123	162	199	42	95	145	145	192	235	
	Ṽ secondary	m³/h	0.76	1.73	2.65	2.65	3.50	4.27	0.90	2.05	3.13	3.13	4.14	5.05	
45/10 °C	T return primary	°C	21	21	20	20	20	20	20	19	19	19	18	18	
	Ṽ primary	m³/h	0.86	1.91	2.89	2.89	3.81	4.62	0.86	1.92	2.84	2.84	3.63	4.32	
	Q max.	kW	33	74	114	114	151	185	39	89	133	133	172	207	
	Ṽ secondary	m³/h	0.81	1.84	2.81	2.81	3.74	4.56	0.97	2.20	3.29	3.29	4.25	5.09	
45/15 °C	T return primary	°C	24	23	23	23	23	23	23	22	21	21	21	21	
	Ṽ primary	m³/h	0.86	1.91	2.91	2.91	3.81	4.62	0.87	1.8	2.61	2.61	3.33	3.98	
	Q max.	kW	30	69	106	106	139	170	37	78	115	115	148	178	
	Ṽ secondary	m³/h	0.88	1.99	3.05	3.05	4.02	4.90	1.07	2.26	3.31	3.31	4.26	5.12	
45/20 °C	T return primary	°C	27	26	26	26	26	26	25	26	24	24	24	24	
	Ṽ primary	m³/h	0.86	1.92	2.91	2.91	3.71	4.41	0.85	1.63	2.36	2.36	3.02	3.61	
	Q max.	kW	27	63	96	96	124	148	33	65	96	96	123	148	
	Ṽ secondary	m³/h	0.96	2.18	3.33	3.33	4.28	5.13	1.16	2.27	3.32	3.32	4.28	5.14	

T return primary °C Return temperature primary  
 Ṽ primary m³/h Flow rate primary  
 Q max. kW Output  
 Ṽ secondary m³/h Flow rate secondary

The specified technical data relate to the full load of the module in each case.

Performance data

TransTherm® aqua F (6-10 to 6-50)

Domestic water secondary	TransTherm® aqua F	Flow temperature heating water											
		65 °C (6-...)						70 °C (6-...)					
		(10)	(16)	(20)	(30)	(40)	(50)	(10)	(16)	(20)	(30)	(40)	(50)
60/5 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>1.08</b>	<b>1.88</b>	<b>2.5</b>	<b>3.73</b>	<b>4.84</b>	<b>5.77</b>	<b>1.32</b>	<b>2.09</b>	<b>2.59</b>	<b>3.76</b>	<b>4.82</b>	<b>5.72</b>
	Q max. kW	43	75	100	149	193	230	60	95	118	171	219	260
	<b>V secondary</b> m³/h	<b>0.67</b>	<b>1.17</b>	<b>1.55</b>	<b>2.33</b>	<b>3.01</b>	<b>3.59</b>	<b>0.94</b>	<b>1.48</b>	<b>1.84</b>	<b>2.67</b>	<b>3.42</b>	<b>4.06</b>
60/10 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.8</b>	<b>1.5</b>	<b>2.01</b>	<b>3.16</b>	<b>4.34</b>	<b>5.39</b>	<b>1.08</b>	<b>1.94</b>	<b>2.48</b>	<b>3.77</b>	<b>4.95</b>	<b>5.92</b>
	Q max. kW	32	60	80	126	173	215	50	90	115	175	230	275
	<b>V secondary</b> m³/h	<b>0.55</b>	<b>1.03</b>	<b>1.38</b>	<b>2.17</b>	<b>2.98</b>	<b>3.7</b>	<b>0.86</b>	<b>1.54</b>	<b>1.98</b>	<b>3.01</b>	<b>3.95</b>	<b>4.73</b>
60/15 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.55</b>	<b>1.05</b>	<b>1.38</b>	<b>2.13</b>	<b>3.08</b>	<b>3.96</b>	<b>0.97</b>	<b>1.8</b>	<b>2.37</b>	<b>3.73</b>	<b>4.84</b>	<b>5.72</b>
	Q max. kW	22	42	55	85	123	158	44	82	108	170	220	260
	<b>V secondary</b> m³/h	<b>0.42</b>	<b>0.8</b>	<b>1.05</b>	<b>1.63</b>	<b>2.35</b>	<b>3.02</b>	<b>0.84</b>	<b>1.57</b>	<b>2.08</b>	<b>3.24</b>	<b>4.21</b>	<b>4.98</b>
60/20 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.3</b>	<b>0.6</b>	<b>0.8</b>	<b>1.28</b>	<b>1.75</b>	<b>2.33</b>	<b>0.62</b>	<b>1.14</b>	<b>2.05</b>	<b>2.4</b>	<b>3.43</b>	<b>4.22</b>
	Q max. kW	12	24	32	51	70	93	28	52	68	109	156	192
	<b>V secondary</b> m³/h	<b>0.26</b>	<b>0.52</b>	<b>0.69</b>	<b>1.1</b>	<b>1.51</b>	<b>2</b>	<b>0.6</b>	<b>1.12</b>	<b>1.47</b>	<b>2.36</b>	<b>3.36</b>	<b>4.14</b>
55/5 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.8</b>	<b>1.5</b>	<b>2.01</b>	<b>3.16</b>	<b>4.34</b>	<b>5.39</b>	<b>1.08</b>	<b>2.09</b>	<b>2.53</b>	<b>3.74</b>	<b>4.84</b>	<b>5.76</b>
	Q max. kW	32	60	80	126	173	215	50	95	115	170	220	262
	<b>V secondary</b> m³/h	<b>0.55</b>	<b>1.03</b>	<b>1.38</b>	<b>2.17</b>	<b>2.98</b>	<b>3.7</b>	<b>0.86</b>	<b>1.63</b>	<b>1.97</b>	<b>2.92</b>	<b>3.78</b>	<b>4.5</b>
55/10 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>1.3</b>	<b>2.06</b>	<b>2.53</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>1.08</b>	<b>1.87</b>	<b>2.42</b>	<b>3.74</b>	<b>4.84</b>	<b>5.72</b>
	Q max. kW	52	82	101	148	192	225	49	85	110	170	220	260
	<b>V secondary</b> m³/h	<b>0.99</b>	<b>1.57</b>	<b>1.93</b>	<b>2.83</b>	<b>3.67</b>	<b>4.3</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.24</b>	<b>4.21</b>	<b>4.98</b>
55/15 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.97</b>	<b>1.65</b>	<b>2.11</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>1.1</b>	<b>1.88</b>	<b>2.41</b>	<b>3.74</b>	<b>4.22</b>	<b>5.1</b>
	Q max. kW	44	75	96	148	192	225	44	75	96	148	192	232
	<b>V secondary</b> m³/h	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>4.84</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.19</b>	<b>4.21</b>	<b>5</b>
55/20 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.95</b>	<b>1.68</b>	<b>2.13</b>	<b>3.23</b>	<b>4.24</b>	<b>5.14</b>	<b>0.84</b>	<b>1.47</b>	<b>1.87</b>	<b>2.84</b>	<b>3.72</b>	<b>4.51</b>
	Q max. kW	38	67	85	129	169	205	38	67	85	129	169	205
	<b>V secondary</b> m³/h	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>
50/5 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>1.25</b>	<b>2.06</b>	<b>2.53</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>1.08</b>	<b>1.87</b>	<b>2.42</b>	<b>3.56</b>	<b>4.84</b>	<b>5.72</b>
	Q max. kW	50	82	101	148	192	225	49	85	110	162	220	260
	<b>V secondary</b> m³/h	<b>0.95</b>	<b>1.57</b>	<b>1.93</b>	<b>2.83</b>	<b>3.67</b>	<b>4.3</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.09</b>	<b>4.21</b>	<b>4.98</b>
50/10 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>1.1</b>	<b>1.88</b>	<b>2.41</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>0.97</b>	<b>1.65</b>	<b>2.11</b>	<b>3.25</b>	<b>4.22</b>	<b>5.1</b>
	Q max. kW	44	75	96	148	192	225	44	75	96	148	192	232
	<b>V secondary</b> m³/h	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>4.84</b>	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>5</b>
50/15 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.95</b>	<b>1.68</b>	<b>2.13</b>	<b>3.23</b>	<b>4.24</b>	<b>5.14</b>	<b>0.84</b>	<b>1.47</b>	<b>1.87</b>	<b>2.84</b>	<b>3.72</b>	<b>4.51</b>
	Q max. kW	38	67	85	129	169	205	38	67	85	129	169	205
	<b>V secondary</b> m³/h	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>
50/20 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.83</b>	<b>1.45</b>	<b>1.81</b>	<b>2.44</b>	<b>3.63</b>	<b>4.44</b>	<b>0.73</b>	<b>1.28</b>	<b>1.61</b>	<b>2.44</b>	<b>3.19</b>	<b>3.89</b>
	Q max. kW	33	58	73	111	145	177	33	58	73	111	145	177
	<b>V secondary</b> m³/h	<b>0.95</b>	<b>1.67</b>	<b>2.1</b>	<b>3.19</b>	<b>4.17</b>	<b>5.09</b>	<b>0.95</b>	<b>1.67</b>	<b>2.1</b>	<b>3.19</b>	<b>4.17</b>	<b>5.09</b>
45/5 °C	T return primary °C	16	15	14	14	14	13	15	13	13	13	12	12
	<b>V primary</b> m³/h	<b>0.87</b>	<b>1.83</b>	<b>2.64</b>	<b>2.64</b>	<b>3.38</b>	<b>4.03</b>	<b>0.84</b>	<b>1.62</b>	<b>2.35</b>	<b>2.35</b>	<b>3.01</b>	<b>3.59</b>
	Q max. kW	48	104	152	152	196	236	52	104	152	152	196	236
	<b>V secondary</b> m³/h	<b>1.04</b>	<b>2.24</b>	<b>3.27</b>	<b>3.27</b>	<b>4.23</b>	<b>5.07</b>	<b>1.13</b>	<b>2.24</b>	<b>3.28</b>	<b>3.28</b>	<b>4.23</b>	<b>5.07</b>
45/10 °C	T return primary °C	19	17	17	17	17	16	17	16	16	16	15	15
	<b>V primary</b> m³/h	<b>0.87</b>	<b>1.69</b>	<b>2.45</b>	<b>2.45</b>	<b>3.13</b>	<b>3.73</b>	<b>0.77</b>	<b>1.49</b>	<b>2.17</b>	<b>2.17</b>	<b>2.78</b>	<b>3.32</b>
	Q max. kW	45	91	134	134	172	206	46	91	133	133	172	206
	<b>V secondary</b> m³/h	<b>1.13</b>	<b>2.25</b>	<b>3.30</b>	<b>3.30</b>	<b>4.24</b>	<b>5.09</b>	<b>1.13</b>	<b>2.24</b>	<b>3.29</b>	<b>3.29</b>	<b>4.24</b>	<b>5.09</b>
45/15 °C	T return primary °C	21	20	20	20	20	19	20	19	19	19	19	18
	<b>V primary</b> m³/h	<b>0.8</b>	<b>1.55</b>	<b>2.24</b>	<b>2.24</b>	<b>2.87</b>	<b>3.43</b>	<b>0.71</b>	<b>1.36</b>	<b>1.98</b>	<b>1.98</b>	<b>2.54</b>	<b>3.03</b>
	Q max. kW	39	78	115	115	148	178	40	78	114	114	148	177
	<b>V secondary</b> m³/h	<b>1.14</b>	<b>2.27</b>	<b>3.31</b>	<b>3.31</b>	<b>4.26</b>	<b>5.11</b>	<b>1.16</b>	<b>2.26</b>	<b>3.30</b>	<b>3.30</b>	<b>4.26</b>	<b>5.10</b>
45/20 °C	T return primary °C	24	23	23	23	23	23	23	23	22	22	22	22
	<b>V primary</b> m³/h	<b>0.72</b>	<b>1.4</b>	<b>2.02</b>	<b>2.02</b>	<b>2.59</b>	<b>3.1</b>	<b>0.63</b>	<b>1.22</b>	<b>1.78</b>	<b>1.78</b>	<b>2.29</b>	<b>2.73</b>
	Q max. kW	33	66	96	96	123	148	33	65	96	96	124	148
	<b>V secondary</b> m³/h	<b>1.16</b>	<b>2.29</b>	<b>3.32</b>	<b>3.32</b>	<b>4.28</b>	<b>5.13</b>	<b>1.15</b>	<b>2.27</b>	<b>3.32</b>	<b>3.32</b>	<b>4.29</b>	<b>5.13</b>

T return primary °C Return temperature primary  
**V primary** m³/h Flow rate primary  
 Q max. kW Output  
**V secondary** m³/h Flow rate secondary

The specified technical data relate to the full load of the module in each case.

Performance data

TransTherm® aqua F

Residential units standard apartment according to DIN 4708	Peak heat demand standard apartment according to DIN 4708 with preparation 10 min	Sum flow rate domestic hot water calculation flow rate according to DIN 4708	Simultaneity factor according to DIN 4708	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak output (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	DHW calorifier output TransTherm® aqua F	TransTherm® aqua F	Required heating water volume at 70/30 °C (40 K)	Required heating water buffer storage tank volume at 70/30 °C (40 K)	Buffer storage tank 1 EnerVal	Required recharging capacity	Required recharging capacity	Required recharging capacity
N	Preparation	Σ VR at DHW 60 °C	g	Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C		Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C	Q at HT 70/30 °C DHW 10/60 °C	Type			Type	Time: 20 min 70/30 °C (40 K)	Time: 30 min 70/30 °C (40 K)	Time: 60 min 70/30 °C (40 K)
	[Wh]	[l/s]		[l/s]	[l/min]	[m³/h]	[kW]	[l/s]	[l/min]	[m³/h]	[kW]		[m³]	[m³]		[kW]	[kW]	[kW]
1	5820	0.17	1.00	0.17	10.01	0.60	35	0.24	14.3	0.86	50	(6-10)	0.13	0.16	(200)	23	15	8
2	11640	0.33	0.680	0.23	13.61	0.82	47	0.24	14.3	0.86	50	(6-10)	0.17	0.22	(200)	31	21	10
3	17460	0.50	0.544	0.27	16.33	0.98	57	0.43	25.8	1.55	90	(6-16)	0.20	0.27	(300)	37	25	12
4	23280	0.67	0.466	0.31	18.66	1.12	65	0.43	25.8	1.55	90	(6-16)	0.23	0.30	(300)	42	28	14
5	29100	0.83	0.415	0.35	20.77	1.25	72	0.43	25.8	1.55	90	(6-16)	0.26	0.34	(500)	47	31	16
6	34920	1.00	0.377	0.38	22.64	1.36	79	0.43	25.8	1.55	90	(6-16)	0.28	0.37	(500)	51	34	17
7	40740	1.17	0.349	0.41	24.45	1.47	85	0.43	25.8	1.55	90	(6-16)	0.31	0.40	(500)	55	37	18
8	46560	1.33	0.349	0.47	27.94	1.68	97	0.55	33.0	1.98	115	(6-20)	0.35	0.45	(500)	63	42	21
9	52380	1.50	0.308	0.46	27.74	1.66	97	0.55	33.0	1.98	115	(6-20)	0.35	0.45	(500)	63	42	21
10	58200	1.67	0.292	0.49	29.23	1.75	102	0.55	33.0	1.98	115	(6-20)	0.37	0.47	(500)	66	44	22
11	64020	1.83	0.279	0.51	30.72	1.84	107	0.55	33.0	1.98	115	(6-20)	0.38	0.50	(500)	70	46	23
12	69840	2.00	0.268	0.54	32.19	1.93	112	0.55	33.0	1.98	115	(6-20)	0.40	0.52	(500)	73	49	24
13	75660	2.17	0.258	0.56	33.57	2.01	117	0.55	33.0	1.98	115	(6-20)	0.42	0.55	(500)	76	51	25
14	81480	2.34	0.249	0.58	34.89	2.09	122	0.84	50.2	3.01	175	(6-30)	0.44	0.57	(500)	79	53	26
15	87300	2.50	0.242	0.61	36.33	2.18	127	0.84	50.2	3.01	175	(6-30)	0.45	0.59	(800)	82	55	27
16	93120	2.67	0.235	0.63	37.63	2.26	131	0.84	50.2	3.01	175	(6-30)	0.47	0.61	(800)	85	57	28
17	98940	2.84	0.228	0.65	38.79	2.33	135	0.84	50.2	3.01	175	(6-30)	0.49	0.63	(800)	88	59	29
18	104760	3.00	0.223	0.67	40.17	2.41	140	0.84	50.2	3.01	175	(6-30)	0.50	0.65	(800)	91	61	30
19	110580	3.17	0.217	0.69	41.27	2.48	144	0.84	50.2	3.01	175	(6-30)	0.52	0.67	(800)	94	62	31
20	116400	3.34	0.212	0.71	42.44	2.55	148	0.84	50.2	3.01	175	(6-30)	0.53	0.69	(800)	96	64	32
21	122220	3.50	0.208	0.73	43.72	2.62	153	0.84	50.2	3.01	175	(6-30)	0.55	0.71	(800)	99	66	33
22	128040	3.67	0.204	0.75	44.92	2.70	157	0.84	50.2	3.01	175	(6-30)	0.56	0.73	(800)	102	68	34
23	133860	3.84	0.200	0.77	46.04	2.76	161	0.84	50.2	3.01	175	(6-30)	0.58	0.75	(800)	104	70	35
24	139680	4.00	0.196	0.78	47.08	2.82	164	0.84	50.2	3.01	175	(6-30)	0.59	0.77	(800)	107	71	36
25	145500	4.17	0.193	0.80	48.29	2.90	168	0.84	50.2	3.01	175	(6-30)	0.60	0.78	(800)	110	73	37
26	151320	4.34	0.190	0.82	49.44	2.97	173	0.84	50.2	3.01	175	(6-30)	0.62	0.80	(800)	112	75	37
27	157140	4.50	0.187	0.84	50.53	3.03	176	0.84	50.2	3.01	175	(6-30)	0.63	0.82	(800)	115	76	38
28	162960	4.67	0.184	0.86	51.56	3.09	180	0.84	50.2	3.01	175	(6-30)	0.64	0.84	(800)	117	78	39
29	168780	4.84	0.181	0.88	52.54	3.15	183	1.10	65.8	3.95	230	(6-40)	0.66	0.85	(800)	119	79	40
30	174600	5.00	0.179	0.90	53.75	3.22	188	1.10	65.8	3.95	230	(6-40)	0.67	0.87	(1000)	122	81	41
31	180420	5.17	0.176	0.91	54.61	3.28	191	1.10	65.8	3.95	230	(6-40)	0.68	0.89	(1000)	124	83	41
32	186240	5.34	0.174	0.93	55.73	3.34	194	1.10	65.8	3.95	230	(6-40)	0.70	0.91	(1000)	126	84	42
33	192060	5.50	0.172	0.95	56.81	3.41	198	1.10	65.8	3.95	230	(6-40)	0.71	0.92	(1000)	129	86	43
34	197880	5.67	0.170	0.96	57.85	3.47	202	1.10	65.8	3.95	230	(6-40)	0.72	0.94	(1000)	131	87	44
35	203700	5.84	0.168	0.98	58.85	3.53	205	1.10	65.8	3.95	230	(6-40)	0.74	0.96	(1000)	133	89	44
36	209520	6.01	0.166	1.00	59.81	3.59	209	1.10	65.8	3.95	230	(6-40)	0.75	0.97	(1000)	136	90	45
37	215340	6.17	0.164	1.01	60.73	3.64	212	1.10	65.8	3.95	230	(6-40)	0.76	0.99	(1000)	138	92	46
38	221160	6.34	0.163	1.03	61.99	3.72	216	1.10	65.8	3.95	230	(6-40)	0.78	1.01	(1000)	141	94	47
39	226980	6.51	0.161	1.05	62.84	3.77	219	1.10	65.8	3.95	230	(6-40)	0.79	1.02	(1000)	143	95	48
40	232800	6.67	0.159	1.06	63.65	3.82	222	1.10	65.8	3.95	230	(6-40)	0.80	1.03	(1000)	144	96	48
41	238620	6.84	0.158	1.08	64.84	3.89	226	1.10	65.8	3.95	230	(6-40)	0.81	1.05	(1000)	147	98	49
42	244440	7.01	0.156	1.09	65.58	3.93	229	1.10	65.8	3.95	230	(6-40)	0.82	1.07	(1000)	149	99	50
43	250260	7.17	0.155	1.11	66.71	4.00	233	1.10	65.8	3.95	230	(6-40)	0.83	1.08	(1000)	151	101	50
44	256080	7.34	0.154	1.13	67.82	4.07	237	1.31	78.8	4.73	275	(6-50)	0.85	1.10	(1500)	154	103	51
45	261900	7.51	0.152	1.14	68.46	4.11	239	1.31	78.8	4.73	275	(6-50)	0.86	1.11	(1500)	155	104	52
46	267720	7.67	0.151	1.16	69.52	4.17	243	1.31	78.8	4.73	275	(6-50)	0.87	1.13	(1500)	158	105	53
47	273540	7.84	0.150	1.18	70.56	4.23	246	1.31	78.8	4.73	275	(6-50)	0.88	1.15	(1500)	160	107	53
48	279360	8.01	0.149	1.19	71.58	4.29	250	1.31	78.8	4.73	275	(6-50)	0.89	1.16	(1500)	162	108	54
49	285180	8.17	0.148	1.21	72.58	4.35	253	1.31	78.8	4.73	275	(6-50)	0.91	1.18	(1500)	165	110	55
50	291000	8.34	0.146	1.22	73.06	4.38	255	1.31	78.8	4.73	275	(6-50)	0.91	1.19	(1500)	166	110	55
51	296820	8.51	0.145	1.23	74.01	4.44	258	1.31	78.8	4.73	275	(6-50)	0.93	1.20	(1500)	168	112	56
52	302640	8.67	0.144	1.25	74.94	4.50	261	1.31	78.8	4.73	275	(6-50)	0.94	1.22	(1500)	170	113	57
53	308460	8.84	0.143	1.26	75.86	4.55	265	1.31	78.8	4.73	275	(6-50)	0.95	1.23	(1500)	172	115	57
54	314280	9.01	0.142	1.28	76.75	4.60	268	1.31	78.8	4.73	275	(6-50)	0.96	1.25	(1500)	174	116	58

Residential units standard apartment according to DIN 4708	Peak heat demand standard apartment according to DIN 4708 with preparation 10 min	Sum flow rate domestic hot water calculation flow rate according to DIN 4708	Simultaneity factor according to DIN 4708	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak output (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	DHW calorifier output TransTherm® aqua F	TransTherm® aqua F	Required heating water volume at 70/30 °C (40 K)	Required heating water buffer storage tank volume at 70/30 °C (40 K)	Buffer storage tank 1 EnerVal	Required recharging capacity	Required recharging capacity	Required recharging capacity
N	Preparation	∑ VR at DHW 60 °C	g	Ṡs at DHW 60 °C	Ṡs at DHW 60 °C	Ṡs at DHW 60 °C	[kW]	Ṡs at DHW 60 °C	Ṡs at DHW 60 °C	Ṡs at DHW 60 °C	Q at HT 70/30 °C DHW 10/60 °C	Type	[m³]	[m³]	Type	Time: 20 min 70/30 °C (40 K)	Time: 30 min 70/30 °C (40 K)	Time: 60 min 70/30 °C (40 K)
	[Wh]	[l/s]		[l/s]	[l/min]	[m³/h]	[kW]	[l/s]	[l/min]	[m³/h]	[kW]		[m³]	[m³]		[kW]	[kW]	[kW]
55	320 100	9.17	0.141	1.29	77.62	4.66	271	1.31	78.8	4.73	275	(6-50)	0.97	1.26	(1500)	176	117	59
56	325 920	9.34	0.140	1.31	78.47	4.71	274	1.31	78.8	4.73	275	(6-50)	0.98	1.28	(1500)	178	119	59
57	331 740	9.51	0.140	1.33	79.87	4.79	279	1.31	78.8	4.73	275	(6-50)	1.00	1.30	(1500)	181	121	60
58	337 560	9.67	0.139	1.34	80.69	4.84	282	1.69	101.2	6.07	350	(6-60)	1.01	1.31	(1500)	183	122	61
59	343 380	9.84	0.138	1.36	81.49	4.89	284	1.69	101.2	6.07	350	(6-60)	1.02	1.32	(1500)	185	123	62
60	349 200	10.01	0.137	1.37	82.27	4.94	287	1.69	101.2	6.07	350	(6-60)	1.03	1.34	(1500)	187	124	62
61	355 020	10.18	0.136	1.38	83.03	4.98	290	1.69	101.2	6.07	350	(6-60)	1.04	1.35	(1500)	188	126	63
62	360 840	10.34	0.135	1.40	83.77	5.03	292	1.69	101.2	6.07	350	(6-60)	1.05	1.36	(1500)	190	127	63
63	366 660	10.51	0.135	1.42	85.12	5.11	297	1.69	101.2	6.07	350	(6-60)	1.06	1.38	(1500)	193	129	64
64	372 480	10.68	0.134	1.43	85.83	5.15	299	1.69	101.2	6.07	350	(6-60)	1.07	1.40	(1500)	195	130	65
65	378 300	10.84	0.133	1.44	86.52	5.19	302	1.69	101.2	6.07	350	(6-60)	1.08	1.41	(1500)	196	131	65
66	384 120	11.01	0.132	1.45	87.19	5.23	304	1.69	101.2	6.07	350	(6-60)	1.09	1.42	(1500)	198	132	66
67	389 940	11.18	0.132	1.48	88.52	5.31	309	1.69	101.2	6.07	350	(6-60)	1.11	1.44	(1500)	201	134	67
68	395 760	11.34	0.131	1.49	89.16	5.35	311	1.69	101.2	6.07	350	(6-60)	1.11	1.45	(1500)	202	135	67
69	401 580	11.51	0.130	1.50	89.78	5.39	313	1.69	101.2	6.07	350	(6-60)	1.12	1.46	(1500)	204	136	68
70	407 400	11.68	0.130	1.52	91.08	5.46	318	1.69	101.2	6.07	350	(6-60)	1.14	1.48	(1500)	207	138	69
71	413 220	11.84	0.129	1.53	91.67	5.50	320	1.69	101.2	6.07	350	(6-60)	1.15	1.49	(1500)	208	139	69
72	419 040	12.01	0.128	1.54	92.24	5.53	322	1.69	101.2	6.07	350	(6-60)	1.15	1.50	(1500)	209	139	70
73	424 860	12.18	0.128	1.56	93.52	5.61	326	1.69	101.2	6.07	350	(6-60)	1.17	1.52	(1500)	212	141	71
74	430 680	12.34	0.127	1.57	94.06	5.64	328	1.69	101.2	6.07	350	(6-60)	1.18	1.53	(1500)	213	142	71
75	436 500	12.51	0.127	1.59	95.33	5.72	333	1.69	101.2	6.07	350	(6-60)	1.19	1.55	(1500)	216	144	72
76	442 320	12.68	0.126	1.60	95.84	5.75	334	1.69	101.2	6.07	350	(6-60)	1.20	1.56	(1500)	217	145	72
77	448 140	12.84	0.126	1.62	97.10	5.83	339	1.69	101.2	6.07	350	(6-60)	1.21	1.58	(1500)	220	147	73
78	453 960	13.01	0.125	1.63	97.58	5.86	340	1.69	101.2	6.07	350	(6-60)	1.22	1.59	(1500)	221	148	74
79	459 780	13.18	0.124	1.63	98.04	5.88	342	1.69	101.2	6.07	350	(6-60)	1.23	1.59	(1500)	222	148	74
80	465 600	13.34	0.124	1.65	99.29	5.96	346	1.69	101.2	6.07	350	(6-60)	1.24	1.61	(2000)	225	150	75
81	471 420	13.51	0.123	1.66	99.72	5.98	348	1.69	101.2	6.07	350	(6-60)	1.25	1.62	(2000)	226	151	75
82	477 240	13.68	0.123	1.68	100.95	6.06	352	1.69	101.2	6.07	350	(6-60)	1.26	1.64	(2000)	229	153	76
83	483 060	13.85	0.122	1.69	101.35	6.08	354	1.69	101.2	6.07	350	(6-60)	1.27	1.65	(2000)	230	153	77
84	488 880	14.01	0.122	1.71	102.57	6.15	358	2.17	130.0	7.80	450	(6-70)	1.28	1.67	(2000)	233	155	78
85	494 700	14.18	0.121	1.72	102.94	6.18	359	2.17	130.0	7.80	450	(6-70)	1.29	1.67	(2000)	233	156	78
86	500 520	14.35	0.121	1.74	104.15	6.25	363	2.17	130.0	7.80	450	(6-70)	1.30	1.69	(2000)	236	157	79
87	506 340	14.51	0.120	1.74	104.49	6.27	365	2.17	130.0	7.80	450	(6-70)	1.31	1.70	(2000)	237	158	79
88	512 160	14.68	0.120	1.76	105.69	6.34	369	2.17	130.0	7.80	450	(6-70)	1.32	1.72	(2000)	240	160	80
89	517 980	14.85	0.120	1.78	106.89	6.41	373	2.17	130.0	7.80	450	(6-70)	1.34	1.74	(2000)	242	162	81
90	523 800	15.01	0.119	1.79	107.19	6.43	374	2.17	130.0	7.80	450	(6-70)	1.34	1.74	(2000)	243	162	81
91	529 620	15.18	0.119	1.81	108.38	6.50	378	2.17	130.0	7.80	450	(6-70)	1.36	1.76	(2000)	246	164	82
92	535 440	15.35	0.118	1.81	108.65	6.52	379	2.17	130.0	7.80	450	(6-70)	1.36	1.77	(2000)	246	164	82
93	541 260	15.51	0.118	1.83	109.83	6.59	383	2.17	130.0	7.80	450	(6-70)	1.37	1.79	(2000)	249	166	83
94	547 080	15.68	0.117	1.83	110.07	6.60	384	2.17	130.0	7.80	450	(6-70)	1.38	1.79	(2000)	250	166	83
95	552 900	15.85	0.117	1.85	111.25	6.67	388	2.17	130.0	7.80	450	(6-70)	1.39	1.81	(2000)	252	168	84
96	558 720	16.01	0.117	1.87	112.42	6.74	392	2.17	130.0	7.80	450	(6-70)	1.41	1.83	(2000)	255	170	85
97	564 540	16.18	0.116	1.88	112.62	6.76	393	2.17	130.0	7.80	450	(6-70)	1.41	1.83	(2000)	255	170	85
98	570 360	16.35	0.116	1.90	113.78	6.83	397	2.17	130.0	7.80	450	(6-70)	1.42	1.85	(2000)	258	172	86
99	576 180	16.51	0.116	1.92	114.94	6.90	401	2.17	130.0	7.80	450	(6-70)	1.44	1.87	(2000)	261	174	87
100	582 000	16.68	0.115	1.92	115.10	6.91	402	2.17	130.0	7.80	450	(6-70)	1.44	1.87	(2000)	261	174	87


Performance data

TransTherm® aqua F

Residential units standard apartment according to DIN 4708	Peak heat demand standard apartment according to DIN 4708 with preparation 10 min	Sum flow rate domestic hot water calculation flow rate according to DIN 4708	Simultaneity factor according to DIN 4708	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak output (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	DHW calorifier output TransTherm® aqua F	TransTherm® aqua F	Required heating water volume at 65/30 °C (35 K)	Required heating water buffer storage tank volume at 65/30 °C (35 K)	Buffer storage tank 1 EnerVal	Required recharging capacity	Required recharging capacity	Required recharging capacity
N	Preparation	Σ VR at DHW 60 °C	g	Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C		Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C	Q at HT 65/30 °C DHW 10/60 °C	Type			Type	Time: 20 min 65/30 °C (35 K)	Time: 30 min 65/30 °C (35 K)	Time: 60 min 65/30 °C (35 K)
	[Wh]	[l/s]		[l/s]	[l/min]	[m³/h]	[kW]	[l/s]	[l/min]	[m³/h]	[kW]		[m³]	[m³]		[kW]	[kW]	[kW]
1	5820	0.17	1.00	0.17	10.01	0.60	35	0.15	9.2	0.55	32	(6-10)	0.14	0.19	(200)	23	15	8
2	11640	0.33	0.680	0.23	13.61	0.82	47	0.24	14.3	0.86	60	(6-16)	0.19	0.25	(200)	31	21	10
3	17460	0.50	0.544	0.27	16.33	0.98	57	0.43	25.8	1.55	60	(6-16)	0.23	0.30	(300)	37	25	12
4	23280	0.67	0.466	0.31	18.66	1.12	65	0.38	23.0	1.38	80	(6-20)	0.27	0.35	(300)	42	28	14
5	29100	0.83	0.415	0.35	20.77	1.25	72	0.38	23.0	1.38	80	(6-20)	0.30	0.39	(500)	47	31	16
6	34920	1.00	0.377	0.38	22.64	1.36	79	0.38	23.0	1.38	80	(6-20)	0.32	0.42	(500)	51	34	17
7	40740	1.17	0.349	0.41	24.45	1.47	85	0.60	36.2	2.17	126	(6-30)	0.35	0.45	(500)	55	37	18
8	46560	1.33	0.349	0.47	27.94	1.68	97	0.60	36.2	2.17	126	(6-30)	0.40	0.52	(500)	63	42	21
9	52380	1.50	0.308	0.46	27.74	1.66	97	0.60	36.2	2.17	126	(6-30)	0.40	0.52	(500)	63	42	21
10	58200	1.67	0.292	0.49	29.23	1.75	102	0.60	36.2	2.17	126	(6-30)	0.42	0.54	(500)	66	44	22
11	64020	1.83	0.279	0.51	30.72	1.84	107	0.60	36.2	2.17	126	(6-30)	0.44	0.57	(500)	70	46	23
12	69840	2.00	0.268	0.54	32.19	1.93	112	0.60	36.2	2.17	126	(6-30)	0.46	0.60	(500)	73	49	24
13	75660	2.17	0.258	0.56	33.57	2.01	117	0.60	36.2	2.17	126	(6-30)	0.48	0.62	(500)	76	51	25
14	81480	2.34	0.249	0.58	34.89	2.09	122	0.60	36.2	2.17	126	(6-30)	0.50	0.65	(500)	79	53	26
15	87300	2.50	0.242	0.61	36.33	2.18	127	0.60	36.2	2.17	126	(6-30)	0.52	0.67	(800)	82	55	27
16	93120	2.67	0.235	0.63	37.63	2.26	131	0.83	49.7	2.98	173	(6-40)	0.54	0.70	(800)	85	57	28
17	98940	2.84	0.228	0.65	38.79	2.33	135	0.83	49.7	2.98	173	(6-40)	0.55	0.72	(800)	88	59	29
18	104760	3.00	0.223	0.67	40.17	2.41	140	0.83	49.7	2.98	173	(6-40)	0.57	0.75	(800)	91	61	30
19	110580	3.17	0.217	0.69	41.27	2.48	144	0.83	49.7	2.98	173	(6-40)	0.59	0.77	(800)	94	62	31
20	116400	3.34	0.212	0.71	42.44	2.55	148	0.83	49.7	2.98	173	(6-40)	0.61	0.79	(800)	96	64	32
21	122220	3.50	0.208	0.73	43.72	2.62	153	0.83	49.7	2.98	173	(6-40)	0.62	0.81	(800)	99	66	33
22	128040	3.67	0.204	0.75	44.92	2.70	157	0.83	49.7	2.98	173	(6-40)	0.64	0.83	(800)	102	68	34
23	133860	3.84	0.200	0.77	46.04	2.76	161	0.83	49.7	2.98	173	(6-40)	0.66	0.86	(800)	104	70	35
24	139680	4.00	0.196	0.78	47.08	2.82	164	0.83	49.7	2.98	173	(6-40)	0.67	0.87	(800)	107	71	36
25	145500	4.17	0.193	0.80	48.29	2.90	168	0.83	49.7	2.98	173	(6-40)	0.69	0.90	(800)	110	73	37
26	151320	4.34	0.190	0.82	49.44	2.97	173	0.83	49.7	2.98	173	(6-40)	0.71	0.92	(800)	112	75	37
27	157140	4.50	0.187	0.84	50.53	3.03	176	0.83	49.7	2.98	173	(6-40)	0.72	0.94	(800)	115	76	38
28	162960	4.67	0.184	0.86	51.56	3.09	180	1.03	61.7	3.70	215	(6-50)	0.74	0.96	(800)	117	78	39
29	168780	4.84	0.181	0.88	52.54	3.15	183	1.03	61.7	3.70	215	(6-50)	0.75	0.98	(800)	119	79	40
30	174600	5.00	0.179	0.90	53.75	3.22	188	1.03	61.7	3.70	215	(6-50)	0.77	1.00	(1000)	122	81	41
31	180420	5.17	0.176	0.91	54.61	3.28	191	1.03	61.7	3.70	215	(6-50)	0.78	1.01	(1000)	124	83	41
32	186240	5.34	0.174	0.93	55.73	3.34	194	1.03	61.7	3.70	215	(6-50)	0.80	1.04	(1000)	126	84	42
33	192060	5.50	0.172	0.95	56.81	3.41	198	1.03	61.7	3.70	215	(6-50)	0.81	1.06	(1000)	129	86	43
34	197880	5.67	0.170	0.96	57.85	3.47	202	1.03	61.7	3.70	215	(6-50)	0.83	1.07	(1000)	131	87	44
35	203700	5.84	0.168	0.98	58.85	3.53	205	1.03	61.7	3.70	215	(6-50)	0.84	1.09	(1000)	133	89	44
36	209520	6.01	0.166	1.00	59.81	3.59	209	1.03	67.7	3.70	215	(6-50)	0.85	1.11	(1000)	136	90	45
37	215340	6.17	0.164	1.01	60.73	3.64	212	1.03	61.7	3.70	215	(6-50)	0.87	1.13	(1000)	138	92	46
38	221160	6.34	0.163	1.03	61.99	3.72	216	1.03	61.7	3.70	215	(6-50)	0.89	1.15	(1000)	141	94	47
39	226980	6.51	0.161	1.05	62.84	3.77	219	1.06	63.7	3.82	220	(6-60)	0.90	1.17	(1000)	143	95	48
40	232800	6.67	0.159	1.06	63.65	3.82	222	1.06	63.7	3.82	220	(6-60)	0.91	1.18	(1000)	144	96	48
41	238620	6.84	0.158	1.08	64.84	3.89	226	1.35	81.0	4.86	280	(6-70)	0.93	1.20	(1000)	147	98	49
42	244440	7.01	0.156	1.09	65.58	3.93	229	1.35	81.0	4.86	280	(6-70)	0.94	1.22	(1000)	149	99	50
43	250260	7.17	0.155	1.11	66.71	4.00	233	1.35	81.0	4.86	280	(6-70)	0.95	1.24	(1000)	151	101	50
44	256080	7.34	0.154	1.13	67.82	4.07	237	1.35	81.0	4.86	280	(6-70)	0.97	1.26	(1500)	154	103	51
45	261900	7.51	0.152	1.14	68.46	4.11	239	1.35	81.0	4.86	280	(6-70)	0.98	1.27	(1500)	155	104	52
46	267720	7.67	0.151	1.16	69.52	4.17	243	1.35	81.0	4.86	280	(6-70)	0.99	1.29	(1500)	158	105	53
47	273540	7.84	0.150	1.18	70.56	4.23	246	1.35	81.0	4.86	280	(6-70)	1.01	1.31	(1500)	160	107	53
48	279360	8.01	0.149	1.19	71.58	4.29	250	1.35	81.0	4.86	280	(6-70)	1.02	1.33	(1500)	162	108	54
49	285180	8.17	0.148	1.21	72.58	4.35	253	1.35	81.0	4.86	280	(6-70)	1.04	1.35	(1500)	165	110	55
50	291000	8.34	0.146	1.22	73.06	4.38	255	1.35	81.0	4.86	280	(6-70)	1.04	1.36	(1500)	166	110	55
51	296820	8.51	0.145	1.23	74.01	4.44	258	1.35	81.0	4.86	280	(6-70)	1.06	1.37	(1500)	168	112	56
52	302640	8.67	0.144	1.25	74.94	4.50	261	1.35	81.0	4.86	280	(6-70)	1.07	1.39	(1500)	170	113	57
53	308460	8.84	0.143	1.26	75.86	4.55	265	1.35	81.0	4.86	280	(6-70)	1.08	1.41	(1500)	172	115	57
54	314280	9.01	0.142	1.28	76.75	4.60	268	1.35	81.0	4.86	280	(6-70)	1.10	1.43	(1500)	174	116	58

Residential units standard apartment according to DIN 4708	Peak heat demand standard apartment according to DIN 4708 with preparation 10 min	Sum flow rate domestic hot water calculation flow rate according to DIN 4708	Simultaneity factor according to DIN 4708	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak output (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	DHW calorifier output TransTherm® aqua F	TransTherm® aqua F	Required heating water volume at 65/30 °C (35 K)	Required heating water buffer storage tank volume at 65/30 °C (35 K)	Buffer storage tank 1 EnerVal	Required recharging capacity		
																Time: 20 min 65/30 °C (35 K)	Time: 30 min 65/30 °C (35 K)	Time: 60 min 65/30 °C (35 K)
N	Preparation	∑ VR at DHW 60 °C	g	$\dot{V}_s$ at DHW 60 °C	$\dot{V}_s$ at DHW 60 °C	$\dot{V}_s$ at DHW 60 °C	[kW]	$\dot{V}_s$ at DHW 60 °C	$\dot{V}_s$ at DHW 60 °C	$\dot{V}_s$ at DHW 60 °C	Q at HT 65/30 °C DHW 10/60 °C	Type	[m³]	[m³]	Type	[kW]	[kW]	[kW]
	[Wh]	[l/s]		[l/s]	[l/min]	[m³/h]		[l/s]	[l/min]	[m³/h]	[kW]							
55	320 100	9.17	0.141	1.29	77.62	4.66	271	1.35	81.0	4.86	280	(6-70)	1.11	1.44	(1500)	176	117	59
56	325 920	9.34	0.140	1.31	78.47	4.71	274	1.35	81.0	4.86	280	(6-70)	1.12	1.46	(1500)	178	119	59
57	331 740	9.51	0.140	1.33	79.87	4.79	279	1.35	81.0	4.86	280	(6-70)	1.14	1.48	(1500)	181	121	60
58	337 560	9.67	0.139	1.34	80.69	4.84	282	1.83	109.8	6.59	380	(6-80)	1.15	1.50	(1500)	183	122	61
59	343 380	9.84	0.138	1.36	81.49	4.89	284	1.83	109.8	6.59	380	(6-80)	1.16	1.51	(1500)	185	123	62
60	349 200	10.01	0.137	1.37	82.27	4.94	287	1.83	109.8	6.59	380	(6-80)	1.18	1.53	(1500)	187	124	62
61	355 020	10.18	0.136	1.38	83.03	4.98	290	1.83	109.8	6.59	380	(6-80)	1.19	1.54	(1500)	188	126	63
62	360 840	10.34	0.135	1.40	83.77	5.03	292	1.83	109.8	6.59	380	(6-80)	1.20	1.56	(1500)	190	127	63
63	366 660	10.51	0.135	1.42	85.12	5.11	297	1.83	109.8	6.59	380	(6-80)	1.22	1.58	(1500)	193	129	64
64	372 480	10.68	0.134	1.43	85.83	5.15	299	1.83	109.8	6.59	380	(6-80)	1.23	1.59	(1500)	195	130	65
65	378 300	10.84	0.133	1.44	86.52	5.19	302	1.83	109.8	6.59	380	(6-80)	1.24	1.61	(1500)	196	131	65
66	384 120	11.01	0.132	1.45	87.19	5.23	304	1.83	109.8	6.59	380	(6-80)	1.25	1.62	(1500)	198	132	66
67	389 940	11.18	0.132	1.48	88.52	5.31	309	1.83	109.8	6.59	380	(6-80)	1.26	1.64	(1500)	201	134	67
68	395 760	11.34	0.131	1.49	89.16	5.35	311	1.83	109.8	6.59	380	(6-80)	1.27	1.66	(1500)	202	135	67
69	401 580	11.51	0.130	1.50	89.78	5.39	313	1.83	109.8	6.59	380	(6-80)	1.28	1.67	(1500)	204	136	68
70	407 400	11.68	0.130	1.52	91.08	5.46	318	1.83	109.8	6.59	380	(6-80)	1.30	1.69	(1500)	207	138	69
71	413 220	11.84	0.129	1.53	91.67	5.50	320	1.83	109.8	6.59	380	(6-80)	1.31	1.70	(1500)	208	139	69
72	419 040	12.01	0.128	1.54	92.24	5.53	322	1.83	109.8	6.59	380	(6-80)	1.32	1.71	(1500)	209	139	70
73	424 860	12.18	0.128	1.56	93.52	5.61	326	1.83	109.8	6.59	380	(6-80)	1.34	1.74	(1500)	212	141	71
74	430 680	12.34	0.127	1.57	94.06	5.64	328	1.83	109.8	6.59	380	(6-80)	1.34	1.75	(1500)	213	142	71
75	436 500	12.51	0.127	1.59	95.33	5.72	333	1.83	109.8	6.59	380	(6-80)	1.36	1.77	(1500)	216	144	72
76	442 320	12.68	0.126	1.60	95.84	5.75	334	1.83	109.8	6.59	380	(6-80)	1.37	1.78	(1500)	217	145	72
77	448 140	12.84	0.126	1.62	97.10	5.83	339	1.83	109.8	6.59	380	(6-80)	1.39	1.80	(1500)	220	147	73
78	453 960	13.01	0.125	1.63	97.58	5.86	340	1.83	109.8	6.59	380	(6-80)	1.39	1.81	(1500)	221	148	74
79	459 780	13.18	0.124	1.63	98.04	5.88	342	1.83	109.8	6.59	380	(6-80)	1.40	1.82	(1500)	222	148	74
80	465 600	13.34	0.124	1.65	99.29	5.96	346	1.83	109.8	6.59	380	(6-80)	1.42	1.84	(2000)	225	150	75
81	471 420	13.51	0.123	1.66	99.72	5.98	348	1.83	109.8	6.59	380	(6-80)	1.42	1.85	(2000)	226	151	75
82	477 240	13.68	0.123	1.68	100.95	6.06	352	1.83	109.8	6.59	380	(6-80)	1.44	1.88	(2000)	229	153	76
83	483 060	13.85	0.122	1.69	101.35	6.08	354	1.83	109.8	6.59	380	(6-80)	1.45	1.88	(2000)	230	153	77
84	488 880	14.01	0.122	1.71	102.57	6.15	358	1.83	109.8	6.59	380	(6-80)	1.47	1.91	(2000)	233	155	78
85	494 700	14.18	0.121	1.72	102.94	6.18	359	1.83	109.8	6.59	380	(6-80)	1.47	1.91	(2000)	233	156	78
86	500 520	14.35	0.121	1.74	104.15	6.25	363	1.83	109.8	6.59	380	(6-80)	1.49	1.93	(2000)	236	157	79
87	506 340	14.51	0.120	1.74	104.49	6.27	365	1.83	109.8	6.59	380	(6-80)	1.49	1.94	(2000)	237	158	79
88	512 160	14.68	0.120	1.76	105.69	6.34	369	1.83	109.8	6.59	380	(6-80)	1.51	1.96	(2000)	240	160	80
89	517 980	14.85	0.120	1.78	106.89	6.41	373	1.83	109.8	6.59	380	(6-80)	1.53	1.99	(2000)	242	162	81
90	523 800	15.01	0.119	1.79	107.19	6.43	374	1.83	109.8	6.59	380	(6-80)	1.53	1.99	(2000)	243	162	81
91	529 620	15.18	0.119	1.81	108.38	6.50	378	1.83	109.8	6.59	380	(6-80)	1.55	2.01	(2000)	246	164	82
92	535 440	15.35	0.118	1.81	108.65	6.52	379	1.83	109.8	6.59	380	(6-80)	1.55	2.02	(2000)	246	164	82
93	541 260	15.51	0.118	1.83	109.83	6.59	383	1.83	109.8	6.59	380	(6-80)	1.57	2.04	(2000)	249	166	83
94	547 080	15.68	0.117	1.83	110.07	6.60	384	1.83	109.8	6.59	380	(6-80)	1.57	2.04	(2000)	250	166	83
95	552 900	15.85	0.117	1.85	111.25	6.67	388	2.51	150.3	9.02	520	(6-90)	1.59	2.07	(2000)	252	168	84
96	558 720	16.01	0.117	1.87	112.42	6.74	392	2.51	150.3	9.02	520	(6-90)	1.61	2.09	(2000)	255	170	85
97	564 540	16.18	0.116	1.88	112.62	6.76	393	2.51	150.3	9.02	520	(6-90)	1.61	2.09	(2000)	255	170	85
98	570 360	16.35	0.116	1.90	113.78	6.83	397	2.51	150.3	9.02	520	(6-90)	1.63	2.11	(2000)	258	172	86
99	576 180	16.51	0.116	1.92	114.94	6.90	401	2.51	150.3	9.02	520	(6-90)	1.64	2.13	(2000)	261	174	87
100	582 000	16.68	0.115	1.92	115.10	6.91	402	2.51	150.3	9.02	520	(6-90)	1.64	2.14	(2000)	261	174	87


Pressure drop ( $\Delta P / Q$  max) – domestic water side (secondary)

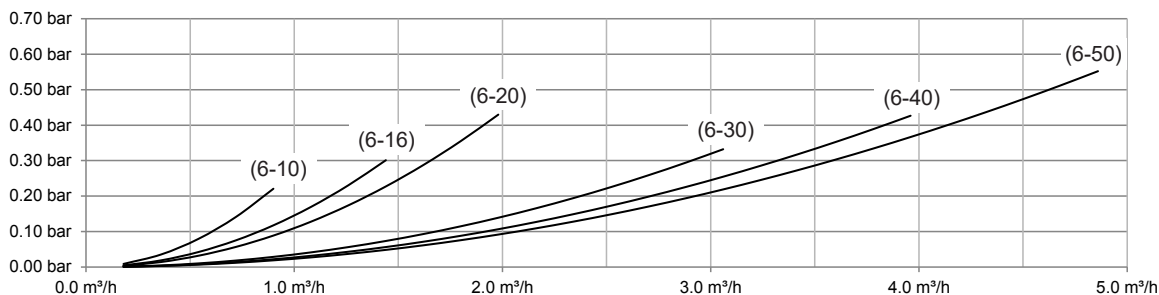


Circulating pumps characteristic curves

for circulation set 3/4"


$\Delta p-v$  (variable)

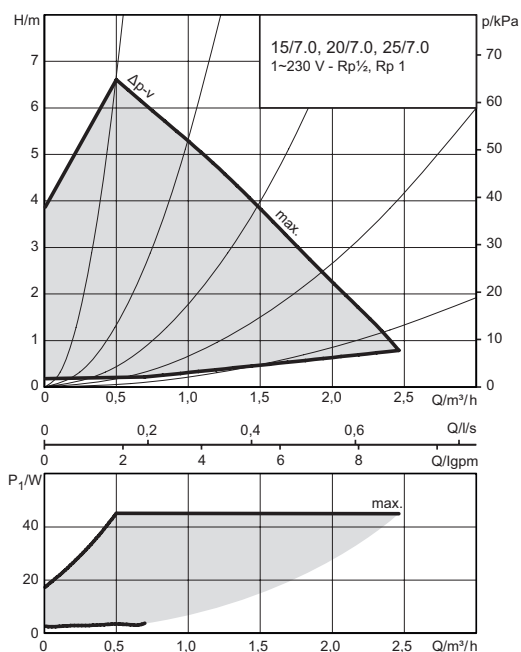

Constant speed


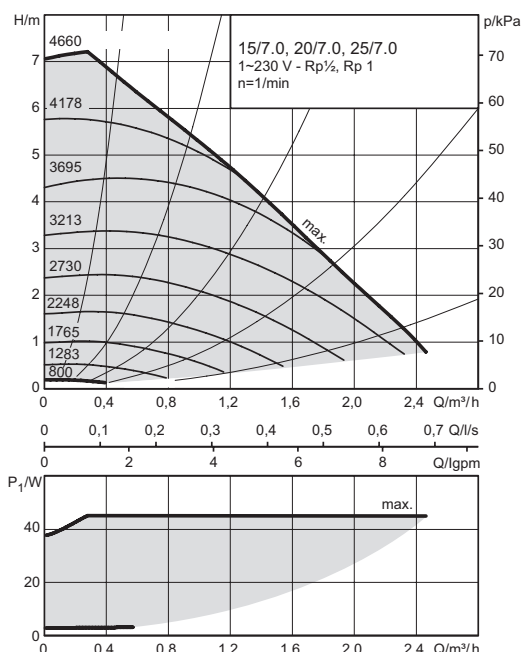


for circulation set 1" and 1¼"

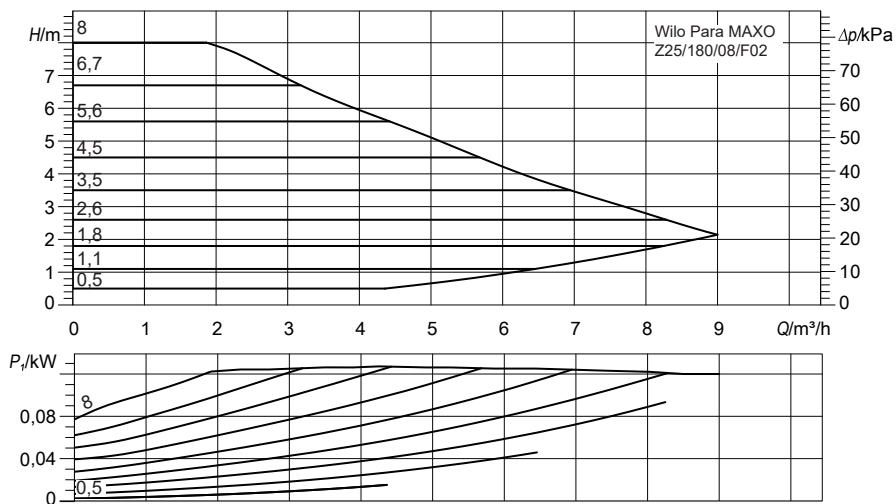

**Fresh water module TransTherm® aqua F (6-10 to 6-20)**  
(Dimensions in mm)

**\* For application according to the SVGW**  
The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

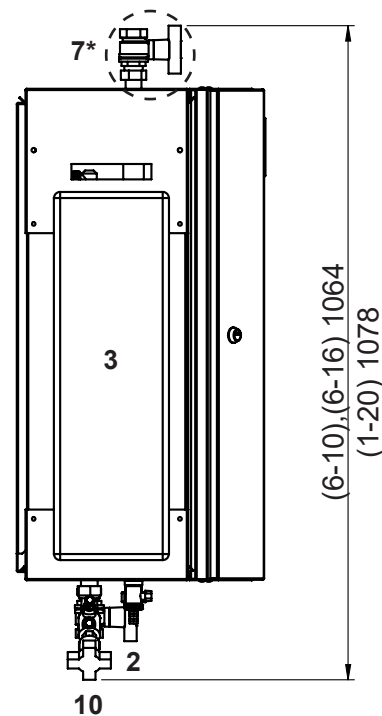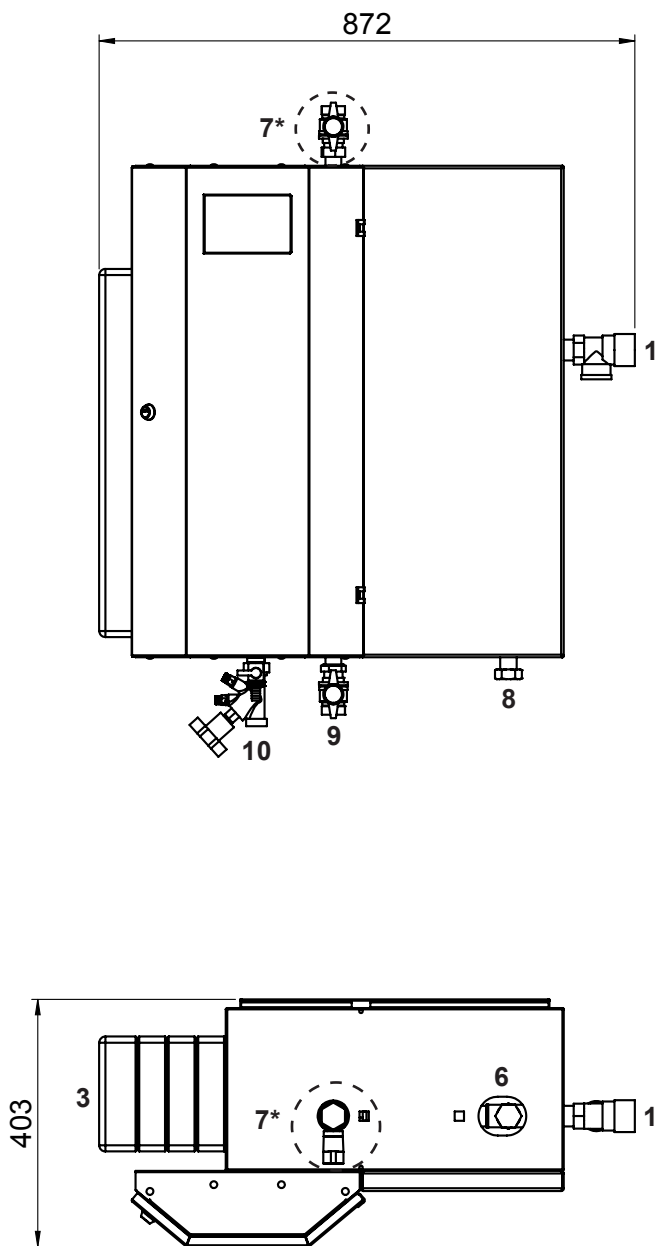

- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger

	(6-10)	(6-16)	(6-20)
6 Circulation <sup>1)</sup>	DN 25, Rp 1" (20, Rp ¾") (IT)		
7* Hot water	DN 25, Rp 1" (IT)		
8 Cold water	DN 25, Gp 1" (IT)		
9 Flow heating water	DN 25, Rp 1" (IT)		
10 Return heating water	DN 20, Gp 1" (IT)		




<sup>1)</sup> Optional, connection and installation on site

Gp = straight internal thread


TransTherm® aqua F	Weight in kg
(6-10)	52
(6-16)	54
(6-20)	56

Fresh water module TransTherm® aqua F (6-10 to 6-20)  
(Dimensions in mm)

\* For application according to the SVGW  
The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

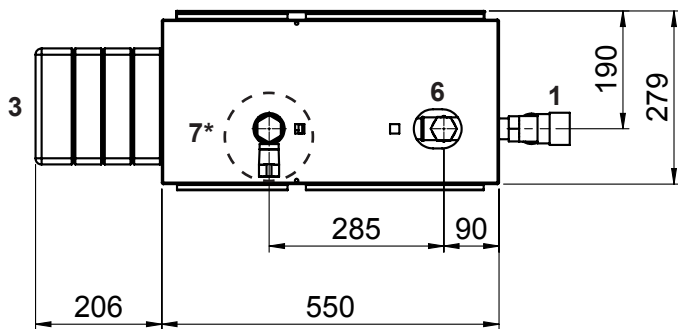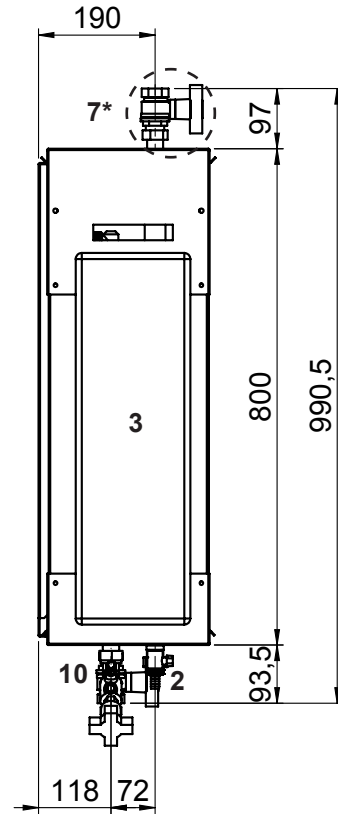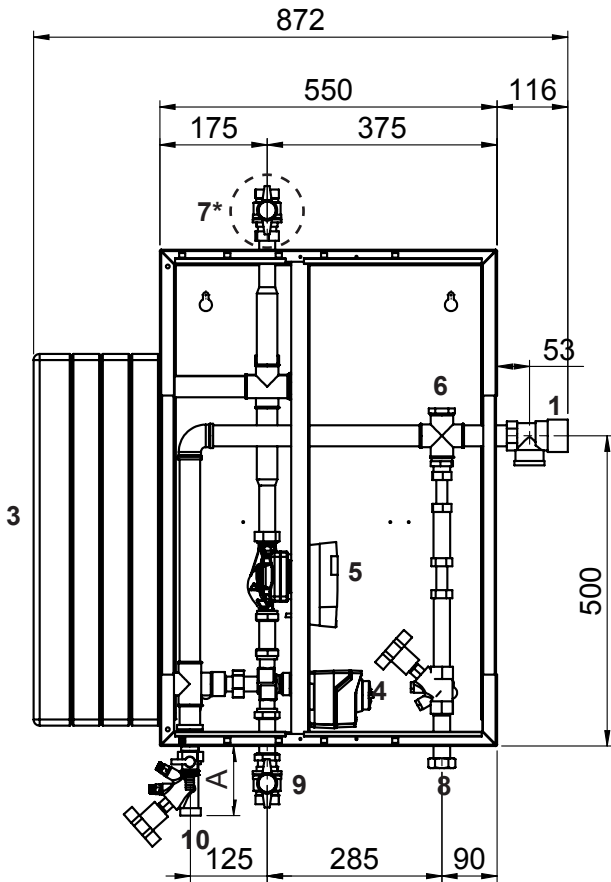

Version incl. circulation set

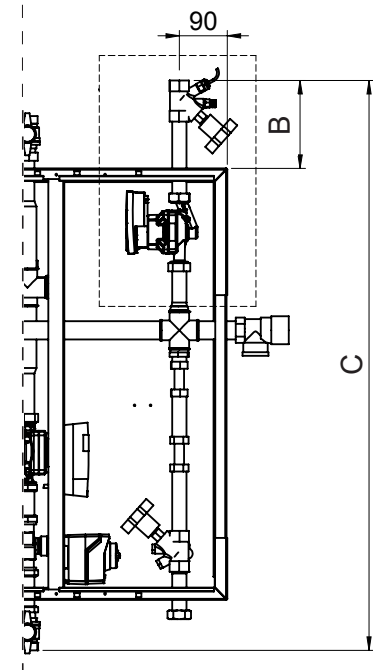

	A	B	C
(6-10)	112	163	1056
(6-16)	112	163	1045
(6-20)	133	246	1143




	(6-10)	(6-16)	(6-20)
1	Safety valve		
2	Hot water 10 bar		
3	Filling/drain valve		
4	Heat exchanger		
5	Primary three-way valve		
6	Primary circulating pump		
7*	Circulation <sup>1)</sup>	DN 25, Rp 1" (20, Rp ¾") (IT)	
8	Hot water	DN 25, Rp 1" (IT)	
9	Cold water	DN 25, Gp 1" (IT)	
10	Flow heating water	DN 25, Rp 1" (IT)	
	Return heating water	DN 20, Gp 1" (IT)	

<sup>1)</sup> Optional, connection and installation on site

Gp = straight internal thread

Fresh water module TransTherm® aqua F (6-30 to 6-50)  
(Dimensions in mm)

\* For application according to the SVGW  
The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

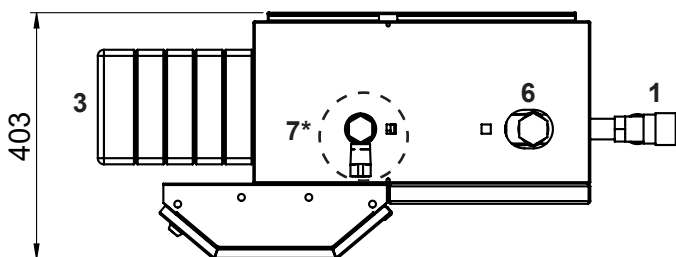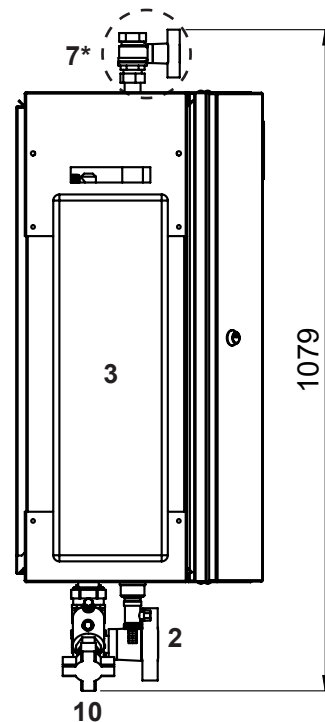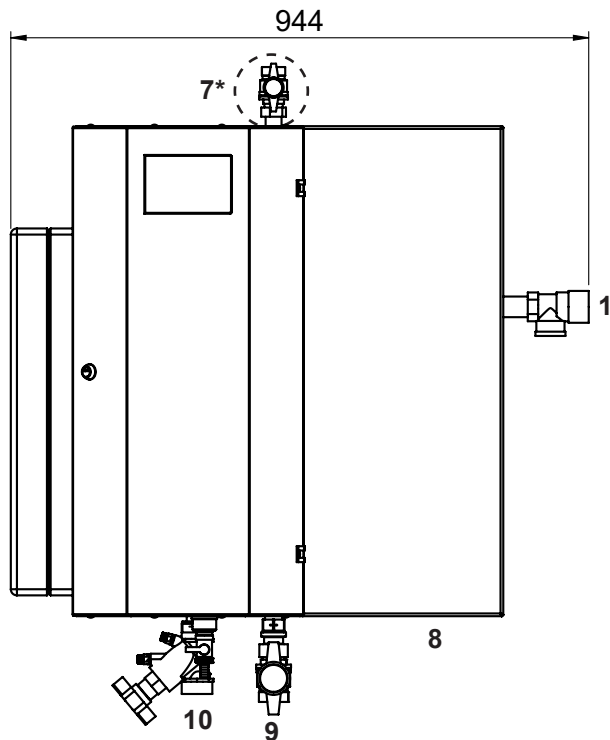

- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger

(6-30) (6-40) (6-50)

- 6 Circulation <sup>1)</sup> DN 32, Rp 1 1/4" (25 Rp 1") (20 Rp 3/4") (IT)
- 7\* Hot water DN 32, Rp 1 1/4" (IT)
- 8 Cold water DN 32, Rp 1 1/4" (IT)
- 9 Flow heating water DN 32, Rp 1 1/4" (IT)
- 10 Return heating water DN 32, Rp 1 1/4" (IT)



<sup>1)</sup> Optional, connection and installation on site

TransTherm® aqua F Weight in kg


(6-30)	62
(6-40)	64
(6-50)	66

Fresh water module TransTherm® aqua F (6-30 to 6-50)  
(Dimensions in mm)


\* For application according to the SVGW  
The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

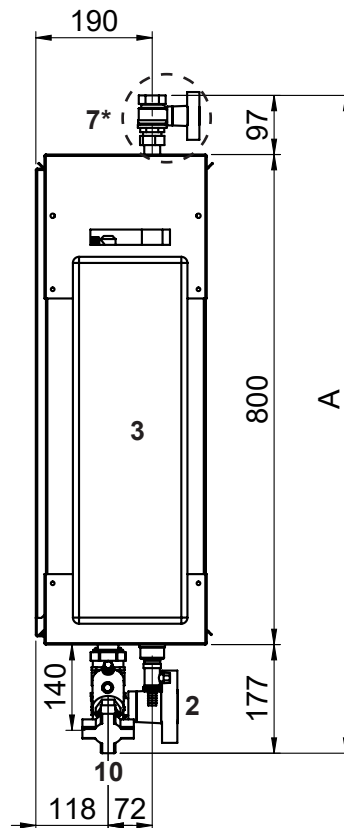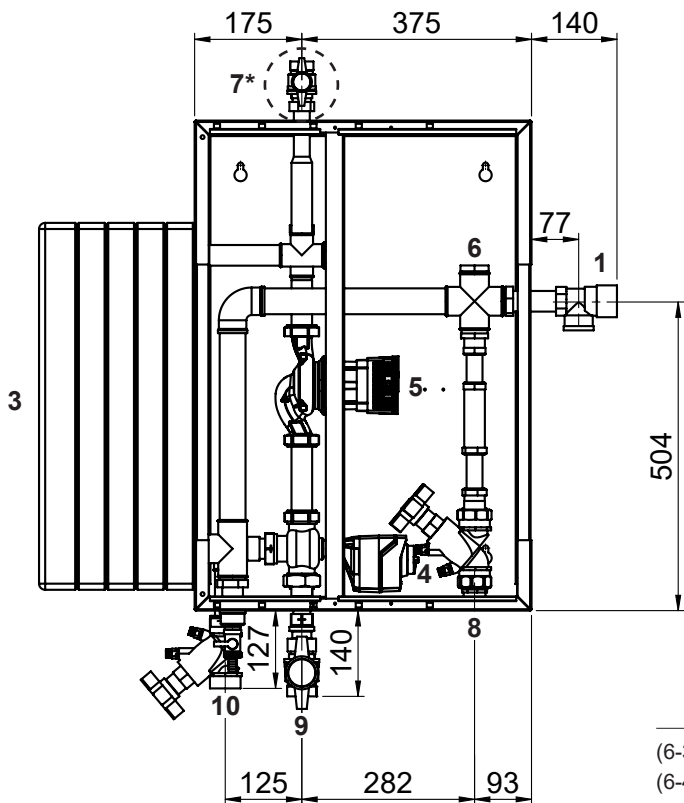

	A
(6-30), (6-50)	1074
(6-40)	1077

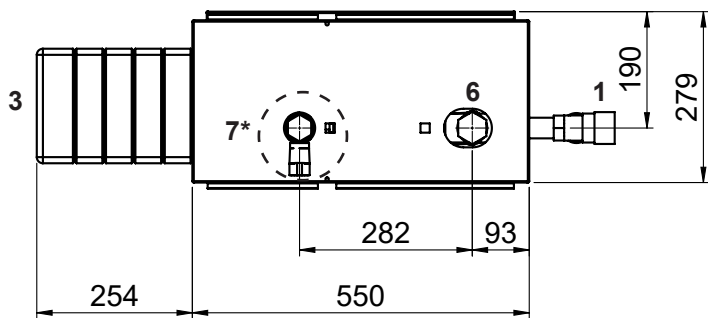

Version incl. circulation set

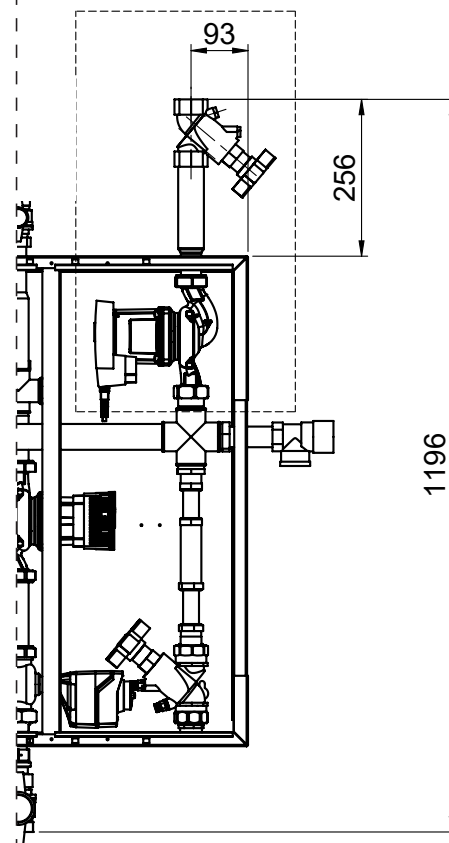

- 1 Safety valve  
Hot water 10 bar
- 2 Filling/drain valve
- 3 Heat exchanger
- 4 Primary three-way valve
- 5 Primary circulating pump


(6-30) (6-40) (6-50)

6	Circulation <sup>1)</sup>	DN 32, Rp 1¼" (25 Rp 1") (20 Rp ¾") (IT)
7*	Hot water	DN 32, Rp 1¼" (IT)
8	Cold water	DN 32, Rp 1¼" (IT)
9	Flow heating water	DN 32, Rp 1¼" (IT)
10	Return heating water	DN 32, Rp 1¼" (IT)

<sup>1)</sup> Optional, connection and installation on site

**Water heating**  
TransTherm® aqua F

**\* For application according to the SVGW**  
The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

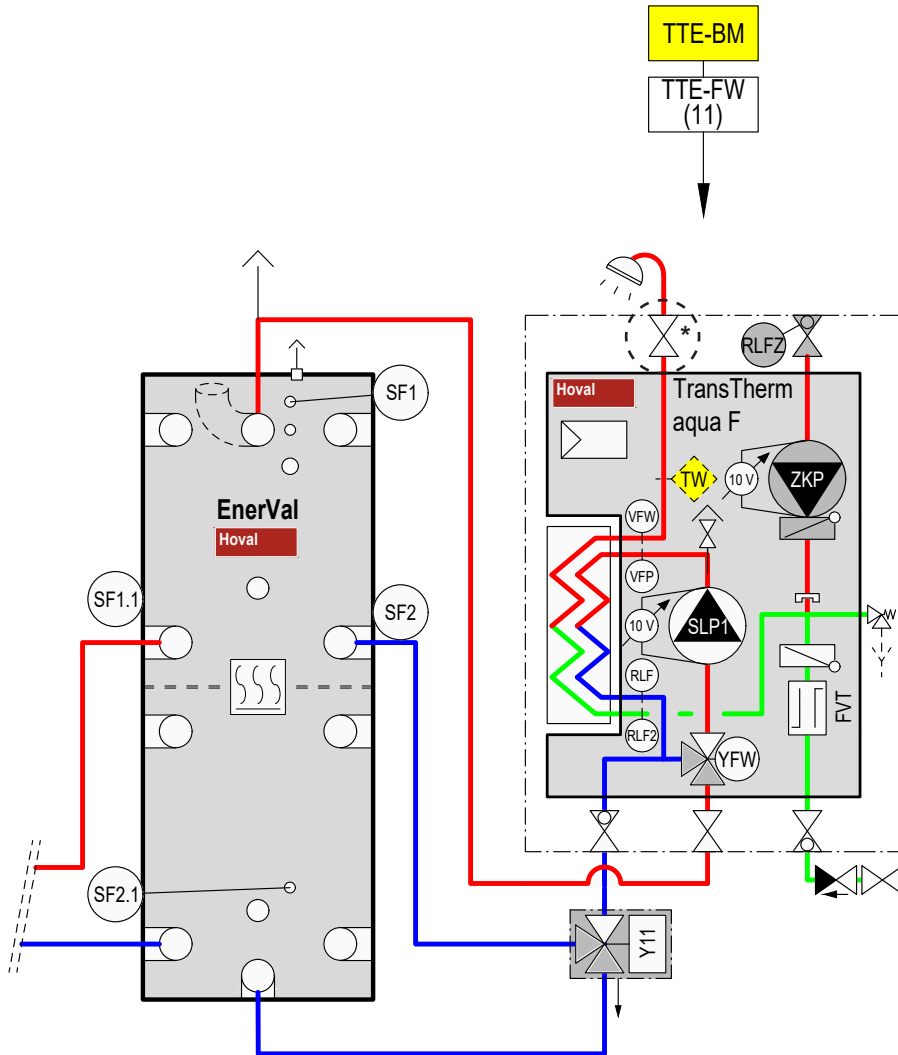

- TTE-FW Basic module district heating/fresh water
- TW Flow temperature monitor (if required)
- VFP Flow sensor primary
- VFW Flow sensor DHW
- RLF Return sensor primary
- RLF2 Return sensor domestic cold water
- SF Calorifier sensor
- SF1 Calorifier sensor 1
- RLFZ Circulation sensor
- SLP1 Calorifier charging pump primary
- FVT Flow rate sensor
- YFW Three-way valve with actuator
- ZKP Recirculation pump
- Y11 Return switching with actuator

*Option*

- BM TopTronic® E control module
- SF2 Calorifier sensor 2

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### **Liechtenstein**

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### **United Kingdom**

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval TransTherm<sup>®</sup> aqua

Calorifier continuous flow system

TransTherm<sup>®</sup> aqua F (6-60)-(6-90)





**Table of contents**

■ Description	5
■ Part numbers	6
■ Technical data	10
■ Dimensions	19
■ Example	23



### Calorifier continuous flow system

Consisting of:

- fresh water module TransTherm® aqua F
- buffer storage tank (option)

### Fresh water module TransTherm® aqua F

- Fully installed station with plate heat exchanger for the provision of domestic hot water using the continuous flow principle
- Mounted on stand frame.  
Stand frame consisting of:
  - frame with corrosion protection coating RAL 9005
  - height-adjustable and vibration-damped feet
- The primary side (heating side) contains the three-way valve, high-efficiency pump, ventilation, filling/drain valve and balancing valve. These components ensure a constant flow temperature at the plate heat exchanger. Pipes made from steel
- The secondary side (DHW side) contains the safety valve (10 bar), non-return valve and a filling/drain valve. A flow sensor ensures the correct hot water temperature. Pipes made from stainless steel
- Stainless steel plate heat exchanger 1.4404, copper-soldered
- Flow rate sensor
- T-piece with dummy plug for on-site connection of the circulation group. Connect the pump to the controller on site.
- TopTronic® E control with integrated thermal disinfection of the DHW storage tank (anti-legionella circuit)

#### Thermal insulation consisting of:

- thermal insulation of the heat exchanger with 30-mm EPP mouldings
- thermal insulation of the pipes with EPP mouldings. Insulation thickness of 50 % according to EnEV
- deep black, similar to RAL 9005
- suitable for damp rooms
- CFC-free
- normal flammability according to DIN 4102-1 and EN 13501-1 (fuel class: B2)
- no bleaching and disintegration of the insulation under the influence of UV light

#### Delivery

- The buffer storage tank required is not included in the scope of delivery


#### On site

- Installation of a circulation unit; the necessary connection is provided.
- Electrical connection of the controller

#### TopTronic® E controller

#### TopTronic® E basic module district heating/fresh water

- Control unit for controlling district heating transfer stations in non-communicative networks and the corresponding consumers with integrated control functions for
  - primary valve control
  - cascade management
  - 1 heating/cooling circuit with mixer
  - 1 heating/cooling circuit without mixer
  - 1 hot water charging circuit
  - various additional functions

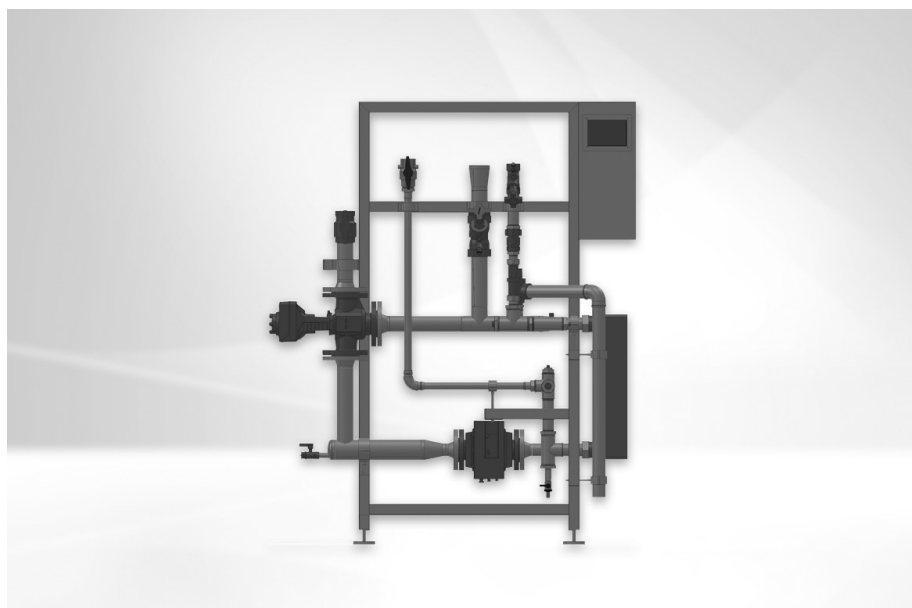

#### Range

Fresh water module

TransTherm® aqua F type	Output kW
(6-60)	350
(6-70)	450
(6-80)	580
(6-90)	700

- Various functions for hot water:
  - selection of different basic programs (week programs, economy mode, holiday until, etc.)
  - various operating modes (e.g. accumulator priority or parallel mode)
  - buffer storage circuit on the primary or secondary side
  - adjustable loading criteria (e.g.: adjustable loading times, undershooting the minimum nominal value, etc.)
  - adjustable switch-off criteria (e.g. achieving the setpoint valve, achieving the lower sensor setpoint value, etc.)
  - adjustable loading block (if the loading flow temperature is too low, the setpoint temperature is not reached, differential temperature-dependent solar circuit control)
- Definable switching times for recirculation pump control
- Outdoor sensor
- Immersion sensor (calorifier sensor)
- Contact sensor (flow temperature sensor)
- Complete plug set for DH module
- speed-controlled pumps

**No further module expansions or controller modules can be installed in the control panel!**

#### Option

##### TopTronic® E control module

- Simple, intuitive operating concept
- Display of the most important operating states
- Configurable start screen
- Operating mode selection

- Configurable day and week programs
- Operation of all connected Hoval CAN bus modules
- Commissioning wizard
- Service and maintenance function
- Fault message management
- Analysis function
- Weather display (with HovalConnect option)
- Adaptation of the heating strategy based on the weather forecast (with HovalConnect option)

#### Notice

The TopTronic® E control module for operating the basic module district heating/fresh water must be ordered separately!

**Further information about the TopTronic® E** see "Controls"

#### Delivery

- All armatures required for operation, such as strainers, flow balancing and shut-off valves, backflow preventer, air-bleeding and drain valve are fitted.


#### Caution

As a result of thermal disinfection of the domestic hot water for legionella protection, increased water temperatures (at least 65 ... 70 °C) occur. Depending on the water quality, this may result in increased calcification at the installed armatures and heat exchangers and also brings the risk of scalding at the tapping points. Corresponding protective measures must be implemented on site.

#### Hot water connection for application according to the SVGW (Swiss association for electricity, gas, district heating and water)

The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

Fresh water module

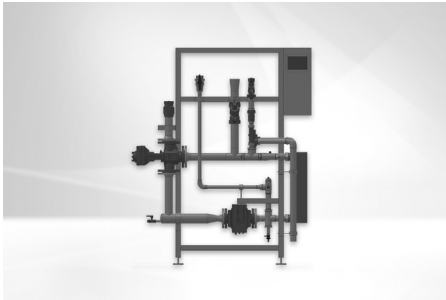

**TransTherm® aqua F**


Fully assembled station with plate heat exchanger for the provision of domestic hot water using the continuous flow principle and built-in Hoval TopTronic® E control  
The required buffer storage tank is not supplied.

**Authorisation number**

TransTherm® aqua F (6-60)-(6-90)  
SVGW test number 2407-7331

TransTherm® aqua F	Output kW	Part No.
(6-60)	350	8006 393
(6-70)	450	8006 394
(6-80)	580	8006 395
(6-90)	700	8006 396

Accessories



**TopTronic® E control module black with 4.3" colour touchscreen**

For operation of all controller modules connected to the bus system (basic, solar, buffer modules etc.)  
 Connection to the Hoval bus system via RJ45 plug connection or via plug terminals (max. 0.75 mm<sup>2</sup>), flat design with flexible installation option

Installation:

- in control panel of the heat generator
- in the Hoval wall casing
- in the control panel front, black high-gloss cover, customer-specific configurable start screen,

Display of current weather or weather forecast (only possible in combination with HovalConnect)

Consisting of:

- TopTronic® E control module black
- Clamping device set control module
- RJ45-RAST 5 CAN cable, L = 500



**Return changeover valve set**

Consisting of:

- temperature sensor
- changeover valve
- drive (8 sec.) DN 20-40
- drive (30 sec.) DN 50-80
- seals
- screw connections

Nominal diameter	Output kW	k <sub>vs</sub> m <sup>3</sup> /h
DN 20	50-90	6.3
DN 25	115-175	10
DN 32	230-275	16
DN 40	350	25
DN 50	450	40
DN 65	580	63
DN 80	700	100

6043 844

7010 832  
 7010 836  
 7011 009  
 7011 025  
 7016 331  
 7016 332  
 7016 333

**Notice**

When using a circulation set (also on-site recirculation pump), it is imperative to install a return switching valve set.



**Circulation set**

for TransTherm® aqua L, L-FW, F  
 Piping of parts in contact with domestic water in stainless steel and gunmetal

Consisting of:

- temperature sensor PT1000
- recirculation pump Wilo Yonos PARA
- recirculation pump Wilo Para MAXO
- regulating valve
- non-return valve

Connection	Flow rate m <sup>3</sup> /h	Recirculation pump
DN 20 ¾" Rp	1.9	Z15/7.0 RKC
DN 25 1" Rp	3.4	Z25/180/08/F02
DN 32 1¼" Rp	5.8	Z25/180/08/F02

8005 279  
 8005 280  
 8005 281

**Part No.**



**Test valve DN 8 G 1/4"**  
 for TransTherm® aqua L, L-FW, F, FS  
 Test valve suitable for flame treatment  
 for hygienic-microbiologic  
 tests.

2049 861



**Sludge separator DM with magnet**  
 made of technopolymer (PO) or  
 brass with insulation (MS)

Type	Connection inches	Flow rate at 1.2 m/s flow speed m³/h	k <sub>v</sub> value m³/h
DM PO	Rp 1"	1.3	10.5
DM PO	Rp 1 1/4"	2.1	10.5
DM MS	Rp 1 1/2"	5.4	63.2
DM MS	Rp 2"	8.2	70.0

2054 376  
 2085 523  
 2085 527  
 2085 528

**Additional sludge separators**  
 see "Various system components"



**Insulation for sludge separator  
 DM PO 1"**  
 10 mm insulating caps made of PE-X foam  
 Thermal conductivity 0.035 W/mK  
 Fire resistance (DIN 4102): class B2

2085 524



**Insulation for sludge separator  
 DM PO 1 1/4"**  
 10 mm insulating caps made of PE-X foam  
 Thermal conductivity 0.035 W/mK  
 Fire resistance (DIN 4102): class B2

2086 031

Part No.



**Temperature monitor 0 ... 120 °C**  
for TransTherm® aqua L, L-FW, F, FS

2048 299



**Safety temperature monitor 70 ... 130 °C**  
for TransTherm® aqua L, L-FW, F, FS

2048 300



**Safety temperature limiter 70 ... 130 °C**  
for TransTherm® aqua L, L-FW, F, FS

2049 619



**Immersion sleeve G 1/2" stainless steel for thermostat**  
for TransTherm® aqua L, L-FW, F, FS  
Installation length = 100 mm  
Outer Ø: 8 mm, inner Ø: 6.5 mm

2048 285



**Immersion sleeve G 1/2" stainless steel for 2 thermostats**  
for TransTherm® aqua L, L-FW, F, FS  
Installation length = 100 mm  
Outer Ø: 15 mm, inner Ø: 13.5 mm

2048 288

Services



**Services and associated scope of services**  
see separate catalogue "Hoval Services"

Commissioning by Hoval customer service is a prerequisite for warranty/guarantee activation.

Performance data

TransTherm® aqua F (6-60 to 6-90)

			Flow temperature heating water											
			52 °C				55 °C				60 °C			
Domestic water secondary	TransTherm® aqua F		(60)	(70)	(80)	(90)	(60)	(70)	(80)	(90)	(60)	(70)	(80)	(90)
60/5 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ primary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
60/10 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ primary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
60/15 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ primary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
60/20 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ primary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
55/5 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ primary</b>	m³/h	-	-	-	-	-	-	-	7.27	10.06	12.62	15.81	
	Q max.	kW	-	-	-	-	-	-	-	270	370	470	600	
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	-	-	-	4.68	6.42	8.15	10.4	
55/10 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ primary</b>	m³/h	-	-	-	-	-	-	-	30	29	29	29	
	Q max.	kW	-	-	-	-	-	-	-	255	320	420	530	
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	-	-	-	4.91	6.17	8.09	10.21	
55/15 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ primary</b>	m³/h	-	-	-	-	-	-	-	30	30	30	30	
	Q max.	kW	-	-	-	-	-	-	-	180	250	320	450	
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	-	-	-	3.90	5.42	6.94	9.75	
55/20 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṁ primary</b>	m³/h	-	-	-	-	-	-	-	30	30	30	30	
	Q max.	kW	-	-	-	-	-	-	-	110	150	200	260	
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	-	-	-	2.73	3.72	4.95	6.44	
50/5 °C	T return primary	°C	-	-	-	-	25	25	25	24	22	22	21	21
	<b>Ṁ primary</b>	m³/h	-	-	-	-	7.32	8.93	11.59	14.69	7.17	9.14	11.65	13.93
	Q max.	kW	-	-	-	-	250	310	405	520	315	405	520	630
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	4.82	5.97	7.80	10.02	6.07	7.80	10.02	12.14
50/10 °C	T return primary	°C	-	-	-	-	27	27	27	26	24	24	24	23
	<b>Ṁ primary</b>	m³/h	-	-	-	-	7.17	8.95	11.64	14.45	6.78	8.62	11.52	13.16
	Q max.	kW	-	-	-	-	230	290	380	480	280	360	485	560
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	4.99	6.29	8.24	10.4	6.07	7.80	10.51	12.14
50/15 °C	T return primary	°C	-	-	-	-	29	29	29	28	26	26	26	26
	<b>Ṁ primary</b>	m³/h	-	-	-	-	7.25	9.24	11.63	14.5	6.31	8.10	10.97	12.35
	Q max.	kW	-	-	-	-	215	275	350	445	245	315	430	490
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	5.33	6.81	8.67	11.02	6.07	7.80	10.65	12.14
50/20 °C	T return primary	°C	-	-	-	-	30	30	30	30	30	29	29	29
	<b>Ṁ primary</b>	m³/h	-	-	-	-	5.03	6.59	9.02	11.96	6.00	7.6	10.35	11.6
	Q max.	kW	-	-	-	-	145	190	260	345	210	270	370	420
	<b>Ṁ secondary</b>	m³/h	-	-	-	-	4.20	5.49	7.51	9.97	6.07	7.80	10.69	12.14
45/5 °C	T return primary	°C	21	21	21	20	20	19	19	19	18	18	18	17
	<b>Ṁ primary</b>	m³/h	7.20	8.95	11.53	14.54	6.90	8.77	11.62	13.4	5.77	7.36	10.00	11.26
	Q max.	kW	255	320	415	530	280	360	480	560	280	360	490	560
	<b>Ṁ secondary</b>	m³/h	5.53	6.94	9.00	11.50	6.07	7.80	10.4	12.14	6.07	7.80	10.62	12.14
45/10 °C	T return primary	°C	23	23	23	23	22	22	22	21	20	20	20	19
	<b>Ṁ primary</b>	m³/h	7.12	9.21	11.51	14.45	6.44	8.23	11.13	12.57	5.27	6.77	9.24	10.28
	Q max.	kW	235	305	385	490	245	315	430	490	245	315	430	490
	<b>Ṁ secondary</b>	m³/h	5.82	7.56	9.54	12.14	6.07	7.80	10.65	12.14	6.07	7.80	10.65	12.14
45/15 °C	T return primary	°C	25	25	25	25	25	24	24	24	23	22	22	22
	<b>Ṁ primary</b>	m³/h	6.10	8.03	10.67	13.49	6.01	7.63	10.38	11.63	4.88	6.23	8.51	9.53
	Q max.	kW	190	250	335	420	210	270	370	420	210	270	370	420
	<b>Ṁ secondary</b>	m³/h	5.49	7.23	9.68	12.14	6.07	7.80	10.69	12.14	6.07	7.80	10.69	12.14
45/20 °C	T return primary	°C	25	25	25	25	27	27	27	27	25	25	25	25
	<b>Ṁ primary</b>	m³/h	2.73	3.53	4.66	6.42	5.46	6.97	9.57	10.65	4.37	5.59	7.68	8.57
	Q max.	kW	85	110	145	200	175	225	310	350	175	225	310	350
	<b>Ṁ secondary</b>	m³/h	2.95	3.82	5.03	6.94	6.07	7.80	10.75	12.14	6.07	7.80	10.75	12.14

T return primary °C Return temperature primary  
**Ṁ primary** m³/h Flow rate primary  
 Q max. kW Output  
**Ṁ secondary** m³/h Flow rate secondary

The specified technical data relate to the full load of the module in each case.

Performance data

TransTherm® aqua F (6-60 to 6-90)

Flow temperature heating water

Domestic water TransTherm® aqua F secondary			65 °C				70 °C			
			(60)	(70)	(80)	(90)	(60)	(70)	(80)	(90)
60/5 °C	T return primary	°C	30	30	30	29	26	26	25	25
	Ṡ primary	m³/h	7.15	9.17	11.72	14.69	7.42	9.40	11.66	14.64
	Q max.	kW	290	370	480	610	375	480	600	760
	Ṡ secondary	m³/h	4.57	5.83	7.57	9.62	5.91	7.57	9.46	11.98
60/10 °C	T return primary	°C	30	30	30	30	28	28	28	27
	Ṡ primary	m³/h	5.45	6.94	9.41	12.88	7.23	9.29	11.92	14.15
	Q max.	kW	220	280	380	520	350	450	580	700
	Ṡ secondary	m³/h	3.82	4.86	6.59	9.02	6.07	7.80	10.06	12.14
60/15 °C	T return primary	°C	30	30	30	30	30	30	30	30
	Ṡ primary	m³/h	3.72	4.83	6.44	8.67	6.72	8.78	11.73	13.49
	Q max.	kW	150	195	260	350	310	405	540	630
	Ṡ secondary	m³/h	2.89	3.76	5.01	6.74	5.97	7.80	10.4	12.14
60/20 °C	T return primary	°C	30	30	30	30	30	30	30	30
	Ṡ primary	m³/h	2.11	2.85	3.72	4.95	4.34	5.64	7.37	9.97
	Q max.	kW	85	115	150	200	200	260	340	460
	Ṡ secondary	m³/h	1.84	2.49	3.25	4.34	4.34	5.64	7.37	9.97
55/5 °C	T return primary	°C	24	24	23	23	22	21	21	21
	Ṡ primary	m³/h	7.42	9.24	11.64	14.38	6.30	8.03	10.99	12.26
	Q max.	kW	350	440	560	700	350	450	620	700
	Ṡ secondary	m³/h	6.07	7.63	9.71	12.14	6.07	7.80	10.75	12.14
55/10 °C	T return primary	°C	26	26	26	25	24	24	24	23
	Ṡ primary	m³/h	7.06	8.96	11.66	13.66	5.96	7.6	10.25	11.6
	Q max.	kW	315	405	530	630	315	405	550	630
	Ṡ secondary	m³/h	6.07	7.80	10.21	12.14	6.07	7.80	10.6	12.14
55/15 °C	T return primary	°C	29	28	28	27	27	26	26	26
	Ṡ primary	m³/h	6.67	8.48	11.48	12.91	5.62	7.16	9.70	10.96
	Q max.	kW	280	360	490	560	280	360	490	560
	Ṡ secondary	m³/h	6.07	7.80	10.62	12.14	6.07	7.80	10.62	12.14
55/20 °C	T return primary	°C	30	30	30	30	29	29	29	28
	Ṡ primary	m³/h	5.95	7.80	10.4	12.14	5.13	6.64	9.01	10.16
	Q max.	kW	240	315	420	490	245	315	430	490
	Ṡ secondary	m³/h	5.95	7.80	10.4	12.14	6.07	7.80	10.65	12.14
50/5 °C	T return primary	°C	20	20	19	19	18	18	17	17
	Ṡ primary	m³/h	6.06	7.72	10.43	11.77	5.30	6.74	9.05	10.27
	Q max.	kW	315	405	550	630	315	405	550	630
	Ṡ secondary	m³/h	6.07	7.80	10.6	12.14	6.07	7.80	10.6	12.14
50/10 °C	T return primary	°C	22	22	22	21	21	20	20	19
	Ṡ primary	m³/h	5.69	7.28	9.81	11.08	4.90	6.24	8.46	9.57
	Q max.	kW	280	360	490	560	280	360	490	560
	Ṡ secondary	m³/h	6.07	7.80	10.62	12.14	6.07	7.80	10.62	12.14
50/15 °C	T return primary	°C	25	25	24	24	23	23	22	22
	Ṡ primary	m³/h	5.30	6.74	9.14	10.29	4.52	5.76	7.82	8.83
	Q max.	kW	245	315	430	490	245	315	430	490
	Ṡ secondary	m³/h	6.07	7.80	10.65	12.14	6.07	7.80	10.65	12.14
50/20 °C	T return primary	°C	27	26	27	26	26	26	25	25
	Ṡ primary	m³/h	4.84	6.00	8.38	9.43	4.12	5.26	7.16	8.07
	Q max.	kW	210	270	370	420	210	270	370	420
	Ṡ secondary	m³/h	6.07	7.80	10.69	12.14	6.07	7.80	10.69	12.14
45/5 °C	T return primary	°C	16	16	16	15	15	14	14	13
	Ṡ primary	m³/h	4.99	6.34	8.58	9.69	4.39	5.59	7.59	8.58
	Q max.	kW	280	360	490	560	280	360	490	560
	Ṡ secondary	m³/h	6.07	7.80	10.62	12.14	6.07	7.80	10.62	12.14
45/10 °C	T return primary	°C	19	18	18	18	17	17	17	16
	Ṡ primary	m³/h	4.57	5.85	7.92	8.94	4.02	5.13	6.98	7.90
	Q max.	kW	245	315	430	490	245	315	430	490
	Ṡ secondary	m³/h	6.07	7.80	10.65	12.14	6.07	7.80	10.65	12.14
45/15 °C	T return primary	°C	21	21	21	20	20	20	20	19
	Ṡ primary	m³/h	4.15	5.30	7.24	8.15	3.64	4.66	6.37	7.18
	Q max.	kW	210	270	370	420	210	270	370	420
	Ṡ secondary	m³/h	6.07	7.80	10.69	12.14	6.07	7.80	10.69	12.14
45/20 °C	T return primary	°C	24	24	24	24	23	23	23	23
	Ṡ primary	m³/h	3.71	4.75	6.51	7.31	3.24	4.15	5.71	6.42
	Q max.	kW	175	225	310	350	175	225	310	350
	Ṡ secondary	m³/h	6.07	7.80	10.75	12.14	6.07	7.80	10.75	12.14

T return primary °C Return temperature primary  
 Ṡ primary m³/h Flow rate primary  
 Q max. kW Output  
 Ṡ secondary m³/h Flow rate secondary

The specified technical data relate to the full load of the module in each case.

Performance data

TransTherm® aqua F

N	Residential units standard apartment according to DIN 4708	Peak heat demand standard apartment according to DIN 4708 with preparation 10 min	Sum flow rate domestic hot water calculation flow rate according to DIN 4708	Simultaneity factor according to DIN 4708	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak output (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	DHW calorifier output TransTherm® aqua F	TransTherm® aqua F	Required heating water volume at 70/30 °C (40 K)	Required heating water buffer storage tank volume at 70/30 °C (40 K)	Buffer storage tank 1 EnerVal	Required recharging capacity	Required recharging capacity	Required recharging capacity
	Preparation	∑ VR at DHW 60 °C	g	Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C	[kW]	Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C	Q at HT 70/30 °C DHW 10/60 °C	Type	[m³]	[m³]	Type	Time: 20 min 70/30 °C (40 K)	Time: 30 min 70/30 °C (40 K)	Time: 60 min 70/30 °C (40 K)	
	[Wh]	[l/s]		[l/s]	[l/min]	[m³/h]		[l/s]	[l/min]	[m³/h]	[kW]					[kW]	[kW]	[kW]	
1	5820	0.17	1.00	0.17	10.01	0.60	35	0.24	14.3	0.86	50	(6-10)	0.13	0.16	(200)	23	15	8	
2	11640	0.33	0.680	0.23	13.61	0.82	47	0.24	14.3	0.86	50	(6-10)	0.17	0.22	(200)	31	21	10	
3	17460	0.50	0.544	0.27	16.33	0.98	57	0.43	25.8	1.55	90	(6-16)	0.20	0.27	(300)	37	25	12	
4	23280	0.67	0.466	0.31	18.66	1.12	65	0.43	25.8	1.55	90	(6-16)	0.23	0.30	(300)	42	28	14	
5	29100	0.83	0.415	0.35	20.77	1.25	72	0.43	25.8	1.55	90	(6-16)	0.26	0.34	(500)	47	31	16	
6	34920	1.00	0.377	0.38	22.64	1.36	79	0.43	25.8	1.55	90	(6-16)	0.28	0.37	(500)	51	34	17	
7	40740	1.17	0.349	0.41	24.45	1.47	85	0.43	25.8	1.55	90	(6-16)	0.31	0.40	(500)	55	37	18	
8	46560	1.33	0.349	0.47	27.94	1.68	97	0.55	33.0	1.98	115	(6-20)	0.35	0.45	(500)	63	42	21	
9	52380	1.50	0.308	0.46	27.74	1.66	97	0.55	33.0	1.98	115	(6-20)	0.35	0.45	(500)	63	42	21	
10	58200	1.67	0.292	0.49	29.23	1.75	102	0.55	33.0	1.98	115	(6-20)	0.37	0.47	(500)	66	44	22	
11	64020	1.83	0.279	0.51	30.72	1.84	107	0.55	33.0	1.98	115	(6-20)	0.38	0.50	(500)	70	46	23	
12	69840	2.00	0.268	0.54	32.19	1.93	112	0.55	33.0	1.98	115	(6-20)	0.40	0.52	(500)	73	49	24	
13	75660	2.17	0.258	0.56	33.57	2.01	117	0.55	33.0	1.98	115	(6-20)	0.42	0.55	(500)	76	51	25	
14	81480	2.34	0.249	0.58	34.89	2.09	122	0.84	50.2	3.01	175	(6-30)	0.44	0.57	(500)	79	53	26	
15	87300	2.50	0.242	0.61	36.33	2.18	127	0.84	50.2	3.01	175	(6-30)	0.45	0.59	(800)	82	55	27	
16	93120	2.67	0.235	0.63	37.63	2.26	131	0.84	50.2	3.01	175	(6-30)	0.47	0.61	(800)	85	57	28	
17	98940	2.84	0.228	0.65	38.79	2.33	135	0.84	50.2	3.01	175	(6-30)	0.49	0.63	(800)	88	59	29	
18	104760	3.00	0.223	0.67	40.17	2.41	140	0.84	50.2	3.01	175	(6-30)	0.50	0.65	(800)	91	61	30	
19	110580	3.17	0.217	0.69	41.27	2.48	144	0.84	50.2	3.01	175	(6-30)	0.52	0.67	(800)	94	62	31	
20	116400	3.34	0.212	0.71	42.44	2.55	148	0.84	50.2	3.01	175	(6-30)	0.53	0.69	(800)	96	64	32	
21	122220	3.50	0.208	0.73	43.72	2.62	153	0.84	50.2	3.01	175	(6-30)	0.55	0.71	(800)	99	66	33	
22	128040	3.67	0.204	0.75	44.92	2.70	157	0.84	50.2	3.01	175	(6-30)	0.56	0.73	(800)	102	68	34	
23	133860	3.84	0.200	0.77	46.04	2.76	161	0.84	50.2	3.01	175	(6-30)	0.58	0.75	(800)	104	70	35	
24	139680	4.00	0.196	0.78	47.08	2.82	164	0.84	50.2	3.01	175	(6-30)	0.59	0.77	(800)	107	71	36	
25	145500	4.17	0.193	0.80	48.29	2.90	168	0.84	50.2	3.01	175	(6-30)	0.60	0.78	(800)	110	73	37	
26	151320	4.34	0.190	0.82	49.44	2.97	173	0.84	50.2	3.01	175	(6-30)	0.62	0.80	(800)	112	75	37	
27	157140	4.50	0.187	0.84	50.53	3.03	176	0.84	50.2	3.01	175	(6-30)	0.63	0.82	(800)	115	76	38	
28	162960	4.67	0.184	0.86	51.56	3.09	180	0.84	50.2	3.01	175	(6-30)	0.64	0.84	(800)	117	78	39	
29	168780	4.84	0.181	0.88	52.54	3.15	183	1.10	65.8	3.95	230	(6-40)	0.66	0.85	(800)	119	79	40	
30	174600	5.00	0.179	0.90	53.75	3.22	188	1.10	65.8	3.95	230	(6-40)	0.67	0.87	(1000)	122	81	41	
31	180420	5.17	0.176	0.91	54.61	3.28	191	1.10	65.8	3.95	230	(6-40)	0.68	0.89	(1000)	124	83	41	
32	186240	5.34	0.174	0.93	55.73	3.34	194	1.10	65.8	3.95	230	(6-40)	0.70	0.91	(1000)	126	84	42	
33	192060	5.50	0.172	0.95	56.81	3.41	198	1.10	65.8	3.95	230	(6-40)	0.71	0.92	(1000)	129	86	43	
34	197880	5.67	0.170	0.96	57.85	3.47	202	1.10	65.8	3.95	230	(6-40)	0.72	0.94	(1000)	131	87	44	
35	203700	5.84	0.168	0.98	58.85	3.53	205	1.10	65.8	3.95	230	(6-40)	0.74	0.96	(1000)	133	89	44	
36	209520	6.01	0.166	1.00	59.81	3.59	209	1.10	65.8	3.95	230	(6-40)	0.75	0.97	(1000)	136	90	45	
37	215340	6.17	0.164	1.01	60.73	3.64	212	1.10	65.8	3.95	230	(6-40)	0.76	0.99	(1000)	138	92	46	
38	221160	6.34	0.163	1.03	61.99	3.72	216	1.10	65.8	3.95	230	(6-40)	0.78	1.01	(1000)	141	94	47	
39	226980	6.51	0.161	1.05	62.84	3.77	219	1.10	65.8	3.95	230	(6-40)	0.79	1.02	(1000)	143	95	48	
40	232800	6.67	0.159	1.06	63.65	3.82	222	1.10	65.8	3.95	230	(6-40)	0.80	1.03	(1000)	144	96	48	
41	238620	6.84	0.158	1.08	64.84	3.89	226	1.10	65.8	3.95	230	(6-40)	0.81	1.05	(1000)	147	98	49	
42	244440	7.01	0.156	1.09	65.58	3.93	229	1.10	65.8	3.95	230	(6-40)	0.82	1.07	(1000)	149	99	50	
43	250260	7.17	0.155	1.11	66.71	4.00	233	1.10	65.8	3.95	230	(6-40)	0.83	1.08	(1000)	151	101	50	
44	256080	7.34	0.154	1.13	67.82	4.07	237	1.31	78.8	4.73	275	(6-50)	0.85	1.10	(1500)	154	103	51	
45	261900	7.51	0.152	1.14	68.46	4.11	239	1.31	78.8	4.73	275	(6-50)	0.86	1.11	(1500)	155	104	52	
46	267720	7.67	0.151	1.16	69.52	4.17	243	1.31	78.8	4.73	275	(6-50)	0.87	1.13	(1500)	158	105	53	
47	273540	7.84	0.150	1.18	70.56	4.23	246	1.31	78.8	4.73	275	(6-50)	0.88	1.15	(1500)	160	107	53	
48	279360	8.01	0.149	1.19	71.58	4.29	250	1.31	78.8	4.73	275	(6-50)	0.89	1.16	(1500)	162	108	54	
49	285180	8.17	0.148	1.21	72.58	4.35	253	1.31	78.8	4.73	275	(6-50)	0.91	1.18	(1500)	165	110	55	
50	291000	8.34	0.146	1.22	73.06	4.38	255	1.31	78.8	4.73	275	(6-50)	0.91	1.19	(1500)	166	110	55	
51	296820	8.51	0.145	1.23	74.01	4.44	258	1.31	78.8	4.73	275	(6-50)	0.93	1.20	(1500)	168	112	56	
52	302640	8.67	0.144	1.25	74.94	4.50	261	1.31	78.8	4.73	275	(6-50)	0.94	1.22	(1500)	170	113	57	
53	308460	8.84	0.143	1.26	75.86	4.55	265	1.31	78.8	4.73	275	(6-50)	0.95	1.23	(1500)	172	115	57	
54	314280	9.01	0.142	1.28	76.75	4.60	268	1.31	78.8	4.73	275	(6-50)	0.96	1.25	(1500)	174	116	58	

Residential units standard apartment according to DIN 4708	Peak heat demand standard apartment according to DIN 4708 with preparation 10 min	Sum flow rate domestic hot water calculation flow rate according to DIN 4708	Simultaneity factor according to DIN 4708	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak output (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	DHW calorifier output TransTherm® aqua F	TransTherm® aqua F	Required heating water volume at 70/30 °C (40 K)	Required heating water buffer storage tank volume at 70/30 °C (40 K)	Buffer storage tank 1 EnerVal	Required recharging capacity	Required recharging capacity	Required recharging capacity
				N	Preparation	∑ VR at DHW 60 °C	g	$\dot{V}_s$ at DHW 60 °C	$\dot{V}_s$ at DHW 60 °C	$\dot{V}_s$ at DHW 60 °C	$\dot{V}_s$ at DHW 60 °C	$\dot{V}_s$ at DHW 60 °C	$\dot{V}_s$ at DHW 60 °C	Q at HT 70/30 °C DHW 10/60 °C	Type		Type	Time: 20 min 70/30 °C (40 K)
	[Wh]	[l/s]		[l/s]	[l/min]	[m³/h]	[kW]	[l/s]	[l/min]	[m³/h]	[kW]		[m³]	[m³]		[kW]	[kW]	[kW]
55	320 100	9.17	0.141	1.29	77.62	4.66	271	1.31	78.8	4.73	275	(6-50)	0.97	1.26	(1500)	176	117	59
56	325 920	9.34	0.140	1.31	78.47	4.71	274	1.31	78.8	4.73	275	(6-50)	0.98	1.28	(1500)	178	119	59
57	331 740	9.51	0.140	1.33	79.87	4.79	279	1.31	78.8	4.73	275	(6-50)	1.00	1.30	(1500)	181	121	60
58	337 560	9.67	0.139	1.34	80.69	4.84	282	1.69	101.2	6.07	350	(6-60)	1.01	1.31	(1500)	183	122	61
59	343 380	9.84	0.138	1.36	81.49	4.89	284	1.69	101.2	6.07	350	(6-60)	1.02	1.32	(1500)	185	123	62
60	349 200	10.01	0.137	1.37	82.27	4.94	287	1.69	101.2	6.07	350	(6-60)	1.03	1.34	(1500)	187	124	62
61	355 020	10.18	0.136	1.38	83.03	4.98	290	1.69	101.2	6.07	350	(6-60)	1.04	1.35	(1500)	188	126	63
62	360 840	10.34	0.135	1.40	83.77	5.03	292	1.69	101.2	6.07	350	(6-60)	1.05	1.36	(1500)	190	127	63
63	366 660	10.51	0.135	1.42	85.12	5.11	297	1.69	101.2	6.07	350	(6-60)	1.06	1.38	(1500)	193	129	64
64	372 480	10.68	0.134	1.43	85.83	5.15	299	1.69	101.2	6.07	350	(6-60)	1.07	1.40	(1500)	195	130	65
65	378 300	10.84	0.133	1.44	86.52	5.19	302	1.69	101.2	6.07	350	(6-60)	1.08	1.41	(1500)	196	131	65
66	384 120	11.01	0.132	1.45	87.19	5.23	304	1.69	101.2	6.07	350	(6-60)	1.09	1.42	(1500)	198	132	66
67	389 940	11.18	0.132	1.48	88.52	5.31	309	1.69	101.2	6.07	350	(6-60)	1.11	1.44	(1500)	201	134	67
68	395 760	11.34	0.131	1.49	89.16	5.35	311	1.69	101.2	6.07	350	(6-60)	1.11	1.45	(1500)	202	135	67
69	401 580	11.51	0.130	1.50	89.78	5.39	313	1.69	101.2	6.07	350	(6-60)	1.12	1.46	(1500)	204	136	68
70	407 400	11.68	0.130	1.52	91.08	5.46	318	1.69	101.2	6.07	350	(6-60)	1.14	1.48	(1500)	207	138	69
71	413 220	11.84	0.129	1.53	91.67	5.50	320	1.69	101.2	6.07	350	(6-60)	1.15	1.49	(1500)	208	139	69
72	419 040	12.01	0.128	1.54	92.24	5.53	322	1.69	101.2	6.07	350	(6-60)	1.15	1.50	(1500)	209	139	70
73	424 860	12.18	0.128	1.56	93.52	5.61	326	1.69	101.2	6.07	350	(6-60)	1.17	1.52	(1500)	212	141	71
74	430 680	12.34	0.127	1.57	94.06	5.64	328	1.69	101.2	6.07	350	(6-60)	1.18	1.53	(1500)	213	142	71
75	436 500	12.51	0.127	1.59	95.33	5.72	333	1.69	101.2	6.07	350	(6-60)	1.19	1.55	(1500)	216	144	72
76	442 320	12.68	0.126	1.60	95.84	5.75	334	1.69	101.2	6.07	350	(6-60)	1.20	1.56	(1500)	217	145	72
77	448 140	12.84	0.126	1.62	97.10	5.83	339	1.69	101.2	6.07	350	(6-60)	1.21	1.58	(1500)	220	147	73
78	453 960	13.01	0.125	1.63	97.58	5.86	340	1.69	101.2	6.07	350	(6-60)	1.22	1.59	(1500)	221	148	74
79	459 780	13.18	0.124	1.63	98.04	5.88	342	1.69	101.2	6.07	350	(6-60)	1.23	1.59	(1500)	222	148	74
80	465 600	13.34	0.124	1.65	99.29	5.96	346	1.69	101.2	6.07	350	(6-60)	1.24	1.61	(2000)	225	150	75
81	471 420	13.51	0.123	1.66	99.72	5.98	348	1.69	101.2	6.07	350	(6-60)	1.25	1.62	(2000)	226	151	75
82	477 240	13.68	0.123	1.68	100.95	6.06	352	1.69	101.2	6.07	350	(6-60)	1.26	1.64	(2000)	229	153	76
83	483 060	13.85	0.122	1.69	101.35	6.08	354	1.69	101.2	6.07	350	(6-60)	1.27	1.65	(2000)	230	153	77
84	488 880	14.01	0.122	1.71	102.57	6.15	358	2.17	130.0	7.80	450	(6-70)	1.28	1.67	(2000)	233	155	78
85	494 700	14.18	0.121	1.72	102.94	6.18	359	2.17	130.0	7.80	450	(6-70)	1.29	1.67	(2000)	233	156	78
86	500 520	14.35	0.121	1.74	104.15	6.25	363	2.17	130.0	7.80	450	(6-70)	1.30	1.69	(2000)	236	157	79
87	506 340	14.51	0.120	1.74	104.49	6.27	365	2.17	130.0	7.80	450	(6-70)	1.31	1.70	(2000)	237	158	79
88	512 160	14.68	0.120	1.76	105.69	6.34	369	2.17	130.0	7.80	450	(6-70)	1.32	1.72	(2000)	240	160	80
89	517 980	14.85	0.120	1.78	106.89	6.41	373	2.17	130.0	7.80	450	(6-70)	1.34	1.74	(2000)	242	162	81
90	523 800	15.01	0.119	1.79	107.19	6.43	374	2.17	130.0	7.80	450	(6-70)	1.34	1.74	(2000)	243	162	81
91	529 620	15.18	0.119	1.81	108.38	6.50	378	2.17	130.0	7.80	450	(6-70)	1.36	1.76	(2000)	246	164	82
92	535 440	15.35	0.118	1.81	108.65	6.52	379	2.17	130.0	7.80	450	(6-70)	1.36	1.77	(2000)	246	164	82
93	541 260	15.51	0.118	1.83	109.83	6.59	383	2.17	130.0	7.80	450	(6-70)	1.37	1.79	(2000)	249	166	83
94	547 080	15.68	0.117	1.83	110.07	6.60	384	2.17	130.0	7.80	450	(6-70)	1.38	1.79	(2000)	250	166	83
95	552 900	15.85	0.117	1.85	111.25	6.67	388	2.17	130.0	7.80	450	(6-70)	1.39	1.81	(2000)	252	168	84
96	558 720	16.01	0.117	1.87	112.42	6.74	392	2.17	130.0	7.80	450	(6-70)	1.41	1.83	(2000)	255	170	85
97	564 540	16.18	0.116	1.88	112.62	6.76	393	2.17	130.0	7.80	450	(6-70)	1.41	1.83	(2000)	255	170	85
98	570 360	16.35	0.116	1.90	113.78	6.83	397	2.17	130.0	7.80	450	(6-70)	1.42	1.85	(2000)	258	172	86
99	576 180	16.51	0.116	1.92	114.94	6.90	401	2.17	130.0	7.80	450	(6-70)	1.44	1.87	(2000)	261	174	87
100	582 000	16.68	0.115	1.92	115.10	6.91	402	2.17	130.0	7.80	450	(6-70)	1.44	1.87	(2000)	261	174	87

Performance data

TransTherm® aqua F


N	Residential units standard apartment according to DIN 4708	Peak heat demand standard apartment according to DIN 4708 with preparation 10 min	Sum flow rate domestic hot water calculation flow rate according to DIN 4708	Simultaneity factor according to DIN 4708	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak output (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	DHW calorifier output TransTherm® aqua F	TransTherm® aqua F	Required heating water volume at 65/30 °C (35 K)	Required heating water buffer storage tank volume at 65/30 °C (35 K)	Buffer storage tank 1 EnerVal	Required recharging capacity	Required recharging capacity	Required recharging capacity
	Preparation	Σ VR at DHW 60 °C	g	Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C	[kW]	Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C	Q at HT 65/30 °C DHW 10/60 °C	Type	[m³]	[m³]	Type	Time: 20 min 65/30 °C (35 K)	Time: 30 min 65/30 °C (35 K)	Time: 60 min 65/30 °C (35 K)	
	[Wh]	[l/s]		[l/s]	[l/min]	[m³/h]		[l/s]	[l/min]	[m³/h]	[kW]					[kW]	[kW]	[kW]	
1	5820	0.17	1.00	0.17	10.01	0.60	35	0.15	9.2	0.55	32	(6-10)	0.14	0.19	(200)	23	15	8	
2	11640	0.33	0.680	0.23	13.61	0.82	47	0.24	14.3	0.86	60	(6-16)	0.19	0.25	(200)	31	21	10	
3	17460	0.50	0.544	0.27	16.33	0.98	57	0.43	25.8	1.55	60	(6-16)	0.23	0.30	(300)	37	25	12	
4	23280	0.67	0.466	0.31	18.66	1.12	65	0.38	23.0	1.38	80	(6-20)	0.27	0.35	(300)	42	28	14	
5	29100	0.83	0.415	0.35	20.77	1.25	72	0.38	23.0	1.38	80	(6-20)	0.30	0.39	(500)	47	31	16	
6	34920	1.00	0.377	0.38	22.64	1.36	79	0.38	23.0	1.38	80	(6-20)	0.32	0.42	(500)	51	34	17	
7	40740	1.17	0.349	0.41	24.45	1.47	85	0.60	36.2	2.17	126	(6-30)	0.35	0.45	(500)	55	37	18	
8	46560	1.33	0.349	0.47	27.94	1.68	97	0.60	36.2	2.17	126	(6-30)	0.40	0.52	(500)	63	42	21	
9	52380	1.50	0.308	0.46	27.74	1.66	97	0.60	36.2	2.17	126	(6-30)	0.40	0.52	(500)	63	42	21	
10	58200	1.67	0.292	0.49	29.23	1.75	102	0.60	36.2	2.17	126	(6-30)	0.42	0.54	(500)	66	44	22	
11	64020	1.83	0.279	0.51	30.72	1.84	107	0.60	36.2	2.17	126	(6-30)	0.44	0.57	(500)	70	46	23	
12	69840	2.00	0.268	0.54	32.19	1.93	112	0.60	36.2	2.17	126	(6-30)	0.46	0.60	(500)	73	49	24	
13	75660	2.17	0.258	0.56	33.57	2.01	117	0.60	36.2	2.17	126	(6-30)	0.48	0.62	(500)	76	51	25	
14	81480	2.34	0.249	0.58	34.89	2.09	122	0.60	36.2	2.17	126	(6-30)	0.50	0.65	(500)	79	53	26	
15	87300	2.50	0.242	0.61	36.33	2.18	127	0.60	36.2	2.17	126	(6-30)	0.52	0.67	(800)	82	55	27	
16	93120	2.67	0.235	0.63	37.63	2.26	131	0.83	49.7	2.98	173	(6-40)	0.54	0.70	(800)	85	57	28	
17	98940	2.84	0.228	0.65	38.79	2.33	135	0.83	49.7	2.98	173	(6-40)	0.55	0.72	(800)	88	59	29	
18	104760	3.00	0.223	0.67	40.17	2.41	140	0.83	49.7	2.98	173	(6-40)	0.57	0.75	(800)	91	61	30	
19	110580	3.17	0.217	0.69	41.27	2.48	144	0.83	49.7	2.98	173	(6-40)	0.59	0.77	(800)	94	62	31	
20	116400	3.34	0.212	0.71	42.44	2.55	148	0.83	49.7	2.98	173	(6-40)	0.61	0.79	(800)	96	64	32	
21	122220	3.50	0.208	0.73	43.72	2.62	153	0.83	49.7	2.98	173	(6-40)	0.62	0.81	(800)	99	66	33	
22	128040	3.67	0.204	0.75	44.92	2.70	157	0.83	49.7	2.98	173	(6-40)	0.64	0.83	(800)	102	68	34	
23	133860	3.84	0.200	0.77	46.04	2.76	161	0.83	49.7	2.98	173	(6-40)	0.66	0.86	(800)	104	70	35	
24	139680	4.00	0.196	0.78	47.08	2.82	164	0.83	49.7	2.98	173	(6-40)	0.67	0.87	(800)	107	71	36	
25	145500	4.17	0.193	0.80	48.29	2.90	168	0.83	49.7	2.98	173	(6-40)	0.69	0.90	(800)	110	73	37	
26	151320	4.34	0.190	0.82	49.44	2.97	173	0.83	49.7	2.98	173	(6-40)	0.71	0.92	(800)	112	75	37	
27	157140	4.50	0.187	0.84	50.53	3.03	176	0.83	49.7	2.98	173	(6-40)	0.72	0.94	(800)	115	76	38	
28	162960	4.67	0.184	0.86	51.56	3.09	180	1.03	61.7	3.70	215	(6-50)	0.74	0.96	(800)	117	78	39	
29	168780	4.84	0.181	0.88	52.54	3.15	183	1.03	61.7	3.70	215	(6-50)	0.75	0.98	(800)	119	79	40	
30	174600	5.00	0.179	0.90	53.75	3.22	188	1.03	61.7	3.70	215	(6-50)	0.77	1.00	(1000)	122	81	41	
31	180420	5.17	0.176	0.91	54.61	3.28	191	1.03	61.7	3.70	215	(6-50)	0.78	1.01	(1000)	124	83	41	
32	186240	5.34	0.174	0.93	55.73	3.34	194	1.03	61.7	3.70	215	(6-50)	0.80	1.04	(1000)	126	84	42	
33	192060	5.50	0.172	0.95	56.81	3.41	198	1.03	61.7	3.70	215	(6-50)	0.81	1.06	(1000)	129	86	43	
34	197880	5.67	0.170	0.96	57.85	3.47	202	1.03	61.7	3.70	215	(6-50)	0.83	1.07	(1000)	131	87	44	
35	203700	5.84	0.168	0.98	58.85	3.53	205	1.03	61.7	3.70	215	(6-50)	0.84	1.09	(1000)	133	89	44	
36	209520	6.01	0.166	1.00	59.81	3.59	209	1.03	67.7	3.70	215	(6-50)	0.85	1.11	(1000)	136	90	45	
37	215340	6.17	0.164	1.01	60.73	3.64	212	1.03	61.7	3.70	215	(6-50)	0.87	1.13	(1000)	138	92	46	
38	221160	6.34	0.163	1.03	61.99	3.72	216	1.03	61.7	3.70	215	(6-50)	0.89	1.15	(1000)	141	94	47	
39	226980	6.51	0.161	1.05	62.84	3.77	219	1.06	63.7	3.82	220	(6-60)	0.90	1.17	(1000)	143	95	48	
40	232800	6.67	0.159	1.06	63.65	3.82	222	1.06	63.7	3.82	220	(6-60)	0.91	1.18	(1000)	144	96	48	
41	238620	6.84	0.158	1.08	64.84	3.89	226	1.35	81.0	4.86	280	(6-70)	0.93	1.20	(1000)	147	98	49	
42	244440	7.01	0.156	1.09	65.58	3.93	229	1.35	81.0	4.86	280	(6-70)	0.94	1.22	(1000)	149	99	50	
43	250260	7.17	0.155	1.11	66.71	4.00	233	1.35	81.0	4.86	280	(6-70)	0.95	1.24	(1000)	151	101	50	
44	256080	7.34	0.154	1.13	67.82	4.07	237	1.35	81.0	4.86	280	(6-70)	0.97	1.26	(1500)	154	103	51	
45	261900	7.51	0.152	1.14	68.46	4.11	239	1.35	81.0	4.86	280	(6-70)	0.98	1.27	(1500)	155	104	52	
46	267720	7.67	0.151	1.16	69.52	4.17	243	1.35	81.0	4.86	280	(6-70)	0.99	1.29	(1500)	158	105	53	
47	273540	7.84	0.150	1.18	70.56	4.23	246	1.35	81.0	4.86	280	(6-70)	1.01	1.31	(1500)	160	107	53	
48	279360	8.01	0.149	1.19	71.58	4.29	250	1.35	81.0	4.86	280	(6-70)	1.02	1.33	(1500)	162	108	54	
49	285180	8.17	0.148	1.21	72.58	4.35	253	1.35	81.0	4.86	280	(6-70)	1.04	1.35	(1500)	165	110	55	
50	291000	8.34	0.146	1.22	73.06	4.38	255	1.35	81.0	4.86	280	(6-70)	1.04	1.36	(1500)	166	110	55	
51	296820	8.51	0.145	1.23	74.01	4.44	258	1.35	81.0	4.86	280	(6-70)	1.06	1.37	(1500)	168	112	56	
52	302640	8.67	0.144	1.25	74.94	4.50	261	1.35	81.0	4.86	280	(6-70)	1.07	1.39	(1500)	170	113	57	
53	308460	8.84	0.143	1.26	75.86	4.55	265	1.35	81.0	4.86	280	(6-70)	1.08	1.41	(1500)	172	115	57	
54	314280	9.01	0.142	1.28	76.75	4.60	268	1.35	81.0	4.86	280	(6-70)	1.10	1.43	(1500)	174	116	58	

N	Residential units standard apartment according to DIN 4708	Peak heat demand standard apartment according to DIN 4708 with preparation 10 min	Sum flow rate domestic hot water calculation flow rate according to DIN 4708	Simultaneity factor according to DIN 4708	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak output (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	Peak flow rate TransTherm® aqua F (DHW)	DHW calorifier output TransTherm® aqua F	TransTherm® aqua F	Required heating water volume at 65/30 °C (35 K)	Required heating water buffer storage tank volume at 65/30 °C (35 K)	Buffer storage tank 1 EnerVal	Required recharging capacity	Required recharging capacity	Required recharging capacity
	Preparation	∑ VR at DHW 60 °C	g	Ṃs at DHW 60 °C	Ṃs at DHW 60 °C	Ṃs at DHW 60 °C	[kW]	Ṃs at DHW 60 °C	Ṃs at DHW 60 °C	Ṃs at DHW 60 °C	Q at HT 65/30 °C DHW 10/60 °C	Type	Type	Time: 20 min 65/30 °C (35 K)	Time: 30 min 65/30 °C (35 K)	Time: 60 min 65/30 °C (35 K)			
	[Wh]	[l/s]		[l/s]	[l/min]	[m³/h]		[l/s]	[l/min]	[m³/h]	[kW]		[m³]	[m³]		[kW]	[kW]	[kW]	
55	320 100	9.17	0.141	1.29	77.62	4.66	271	1.35	81.0	4.86	280	(6-70)	1.11	1.44	(1500)	176	117	59	
56	325 920	9.34	0.140	1.31	78.47	4.71	274	1.35	81.0	4.86	280	(6-70)	1.12	1.46	(1500)	178	119	59	
57	331 740	9.51	0.140	1.33	79.87	4.79	279	1.35	81.0	4.86	280	(6-70)	1.14	1.48	(1500)	181	121	60	
58	337 560	9.67	0.139	1.34	80.69	4.84	282	1.83	109.8	6.59	380	(6-80)	1.15	1.50	(1500)	183	122	61	
59	343 380	9.84	0.138	1.36	81.49	4.89	284	1.83	109.8	6.59	380	(6-80)	1.16	1.51	(1500)	185	123	62	
60	349 200	10.01	0.137	1.37	82.27	4.94	287	1.83	109.8	6.59	380	(6-80)	1.18	1.53	(1500)	187	124	62	
61	355 020	10.18	0.136	1.38	83.03	4.98	290	1.83	109.8	6.59	380	(6-80)	1.19	1.54	(1500)	188	126	63	
62	360 840	10.34	0.135	1.40	83.77	5.03	292	1.83	109.8	6.59	380	(6-80)	1.20	1.56	(1500)	190	127	63	
63	366 660	10.51	0.135	1.42	85.12	5.11	297	1.83	109.8	6.59	380	(6-80)	1.22	1.58	(1500)	193	129	64	
64	372 480	10.68	0.134	1.43	85.83	5.15	299	1.83	109.8	6.59	380	(6-80)	1.23	1.59	(1500)	195	130	65	
65	378 300	10.84	0.133	1.44	86.52	5.19	302	1.83	109.8	6.59	380	(6-80)	1.24	1.61	(1500)	196	131	65	
66	384 120	11.01	0.132	1.45	87.19	5.23	304	1.83	109.8	6.59	380	(6-80)	1.25	1.62	(1500)	198	132	66	
67	389 940	11.18	0.132	1.48	88.52	5.31	309	1.83	109.8	6.59	380	(6-80)	1.26	1.64	(1500)	201	134	67	
68	395 760	11.34	0.131	1.49	89.16	5.35	311	1.83	109.8	6.59	380	(6-80)	1.27	1.66	(1500)	202	135	67	
69	401 580	11.51	0.130	1.50	89.78	5.39	313	1.83	109.8	6.59	380	(6-80)	1.28	1.67	(1500)	204	136	68	
70	407 400	11.68	0.130	1.52	91.08	5.46	318	1.83	109.8	6.59	380	(6-80)	1.30	1.69	(1500)	207	138	69	
71	413 220	11.84	0.129	1.53	91.67	5.50	320	1.83	109.8	6.59	380	(6-80)	1.31	1.70	(1500)	208	139	69	
72	419 040	12.01	0.128	1.54	92.24	5.53	322	1.83	109.8	6.59	380	(6-80)	1.32	1.71	(1500)	209	139	70	
73	424 860	12.18	0.128	1.56	93.52	5.61	326	1.83	109.8	6.59	380	(6-80)	1.34	1.74	(1500)	212	141	71	
74	430 680	12.34	0.127	1.57	94.06	5.64	328	1.83	109.8	6.59	380	(6-80)	1.34	1.75	(1500)	213	142	71	
75	436 500	12.51	0.127	1.59	95.33	5.72	333	1.83	109.8	6.59	380	(6-80)	1.36	1.77	(1500)	216	144	72	
76	442 320	12.68	0.126	1.60	95.84	5.75	334	1.83	109.8	6.59	380	(6-80)	1.37	1.78	(1500)	217	145	72	
77	448 140	12.84	0.126	1.62	97.10	5.83	339	1.83	109.8	6.59	380	(6-80)	1.39	1.80	(1500)	220	147	73	
78	453 960	13.01	0.125	1.63	97.58	5.86	340	1.83	109.8	6.59	380	(6-80)	1.39	1.81	(1500)	221	148	74	
79	459 780	13.18	0.124	1.63	98.04	5.88	342	1.83	109.8	6.59	380	(6-80)	1.40	1.82	(1500)	222	148	74	
80	465 600	13.34	0.124	1.65	99.29	5.96	346	1.83	109.8	6.59	380	(6-80)	1.42	1.84	(2000)	225	150	75	
81	471 420	13.51	0.123	1.66	99.72	5.98	348	1.83	109.8	6.59	380	(6-80)	1.42	1.85	(2000)	226	151	75	
82	477 240	13.68	0.123	1.68	100.95	6.06	352	1.83	109.8	6.59	380	(6-80)	1.44	1.88	(2000)	229	153	76	
83	483 060	13.85	0.122	1.69	101.35	6.08	354	1.83	109.8	6.59	380	(6-80)	1.45	1.88	(2000)	230	153	77	
84	488 880	14.01	0.122	1.71	102.57	6.15	358	1.83	109.8	6.59	380	(6-80)	1.47	1.91	(2000)	233	155	78	
85	494 700	14.18	0.121	1.72	102.94	6.18	359	1.83	109.8	6.59	380	(6-80)	1.47	1.91	(2000)	233	156	78	
86	500 520	14.35	0.121	1.74	104.15	6.25	363	1.83	109.8	6.59	380	(6-80)	1.49	1.93	(2000)	236	157	79	
87	506 340	14.51	0.120	1.74	104.49	6.27	365	1.83	109.8	6.59	380	(6-80)	1.49	1.94	(2000)	237	158	79	
88	512 160	14.68	0.120	1.76	105.69	6.34	369	1.83	109.8	6.59	380	(6-80)	1.51	1.96	(2000)	240	160	80	
89	517 980	14.85	0.120	1.78	106.89	6.41	373	1.83	109.8	6.59	380	(6-80)	1.53	1.99	(2000)	242	162	81	
90	523 800	15.01	0.119	1.79	107.19	6.43	374	1.83	109.8	6.59	380	(6-80)	1.53	1.99	(2000)	243	162	81	
91	529 620	15.18	0.119	1.81	108.38	6.50	378	1.83	109.8	6.59	380	(6-80)	1.55	2.01	(2000)	246	164	82	
92	535 440	15.35	0.118	1.81	108.65	6.52	379	1.83	109.8	6.59	380	(6-80)	1.55	2.02	(2000)	246	164	82	
93	541 260	15.51	0.118	1.83	109.83	6.59	383	1.83	109.8	6.59	380	(6-80)	1.57	2.04	(2000)	249	166	83	
94	547 080	15.68	0.117	1.83	110.07	6.60	384	1.83	109.8	6.59	380	(6-80)	1.57	2.04	(2000)	250	166	83	
95	552 900	15.85	0.117	1.85	111.25	6.67	388	2.51	150.3	9.02	520	(6-90)	1.59	2.07	(2000)	252	168	84	
96	558 720	16.01	0.117	1.87	112.42	6.74	392	2.51	150.3	9.02	520	(6-90)	1.61	2.09	(2000)	255	170	85	
97	564 540	16.18	0.116	1.88	112.62	6.76	393	2.51	150.3	9.02	520	(6-90)	1.61	2.09	(2000)	255	170	85	
98	570 360	16.35	0.116	1.90	113.78	6.83	397	2.51	150.3	9.02	520	(6-90)	1.63	2.11	(2000)	258	172	86	
99	576 180	16.51	0.116	1.92	114.94	6.90	401	2.51	150.3	9.02	520	(6-90)	1.64	2.13	(2000)	261	174	87	
100	582 000	16.68	0.115	1.92	115.10	6.91	402	2.51	150.3	9.02	520	(6-90)	1.64	2.14	(2000)	261	174	87	

Performance data


TransTherm® aqua F (6-60)

Performance data		Q	VS	VS	VS	Buffer storage tank
primary	secondary	kW	l/s	l/min	m <sup>3</sup> /h	min. content in l <sup>1)</sup>
70 °C/30 °C	10 °C/60 °C	350	1.67	100.33	6.02	1405
65 °C/30 °C	10 °C/60 °C	220	1.05	63.07	3.78	883
65 °C/30 °C	10 °C/55 °C	315	1.67	100.33	6.02	1405
65 °C/30 °C	10 °C/50 °C	280	1.67	100.33	6.02	1405
60 °C/30 °C	10 °C/55 °C	255	1.35	81.22	4.87	1137
60 °C/30 °C	10 °C/50 °C	280	1.67	100.33	6.02	1405
55 °C/30 °C	10 °C/50 °C	230	1.37	82.42	4.95	1154
55 °C/30 °C	10 °C/45 °C	245	1.67	100.33	6.02	1405




TransTherm® aqua F (6-70)

Performance data		Q	VS	VS	VS	Buffer storage tank
primary	secondary	kW	l/s	l/min	m <sup>3</sup> /h	min. content in l <sup>1)</sup>
70 °C/30 °C	10 °C/60 °C	450	2.15	129.00	7.74	1806
65 °C/30 °C	10 °C/60 °C	280	1.34	80.27	4.82	1124
65 °C/30 °C	10 °C/55 °C	405	2.15	129.00	7.74	1806
65 °C/30 °C	10 °C/50 °C	360	2.15	129.00	7.74	1806
60 °C/30 °C	10 °C/55 °C	320	1.70	101.93	6.12	1427
60 °C/30 °C	10 °C/50 °C	360	2.15	129.00	7.74	1806
55 °C/30 °C	10 °C/50 °C	290	1.73	103.92	6.24	1455
55 °C/30 °C	10 °C/45 °C	315	2.15	129.00	7.74	1806




TransTherm® aqua F (6-80)

Performance data		Q	VS	VS	VS	Buffer storage tank
primary	secondary	kW	l/s	l/min	m <sup>3</sup> /h	min. content in l <sup>1)</sup>
70 °C/30 °C	10 °C/60 °C	580	2.77	166.27	9.98	2328
65 °C/30 °C	10 °C/60 °C	380	1.82	108.93	6.54	1525
65 °C/30 °C	10 °C/55 °C	530	2.81	168.81	10.13	2363
65 °C/30 °C	10 °C/50 °C	490	2.93	175.58	10.54	2458
60 °C/30 °C	10 °C/55 °C	420	2.23	133.78	8.03	1873
60 °C/30 °C	10 °C/50 °C	485	2.90	173.79	10.43	2433
55 °C/30 °C	10 °C/50 °C	380	2.27	136.17	8.17	1906
55 °C/30 °C	10 °C/45 °C	430	2.93	176.10	10.57	2465



TransTherm® aqua F (6-90)

Performance data		Q	VS	VS	VS	Buffer storage tank
primary	secondary	kW	l/s	l/min	m <sup>3</sup> /h	min. content in l <sup>1)</sup>
70 °C/30 °C	10 °C/60 °C	700	3.34	200.67	12.04	2809
65 °C/30 °C	10 °C/60 °C	520	2.48	149.07	8.94	2087
65 °C/30 °C	10 °C/55 °C	630	3.34	200.67	12.04	2809
65 °C/30 °C	10 °C/50 °C	560	3.34	200.67	12.04	2809
60 °C/30 °C	10 °C/55 °C	530	2.81	168.81	10.13	2363
60 °C/30 °C	10 °C/50 °C	560	3.34	200.67	12.04	2809
55 °C/30 °C	10 °C/50 °C	480	2.87	172.00	10.32	2408
55 °C/30 °C	10 °C/45 °C	490	3.34	200.67	12.04	2809



<sup>1)</sup> The calculation for the content of the buffer storage tank depends on the temperature spread. Here, 0.7 has been set for the temperature spread and 2 for short non-draw-off times. See calculation of the required buffer volume

**Performance data**

**Calculation of the required buffer volume**

In order to provide the required energy for domestic water heating, a fresh water station is generally connected to a buffer storage tank. The volume of the buffer storage tank is determined by the domestic hot water requirement of the installation, the storage temperature in the buffer storage tank and the user behaviour.

$$VP = V \times t \times (Tp/Tww) \times Sn$$


- VP Required minimum volume of the buffer storage tank
- V Calculated peak flow of the fresh water module
- t Time for which the peak flow is required. The value can be gear towards, for example the duration of the tub filling, user information or the standard value from DIN 4708 (10 min.)
- (Tp/Tww) For the temperature spread between the buffer storage tank and domestic water
  - 0.5 for a high temperature spread (e.g. 90/45 °C)
  - 0.7 for a medium temperature spread (e.g. 70/45 °C)
  - 1 for a low temperature spread (e.g. 55/45 °C)
- Sn Safety factor for observing user behaviour
  - 1 normal non-draw-off times
  - 2 short non-draw-off times
  - 3-4 very short non-draw-off times

**Example calculation**

VP	V	t	(Tp/Tww)	Sn
(l)	(l/min)	(min)		
1576	78.8	10.0	1.0	2.0

	Result
	Input


Pressure drop ( $\Delta P / Q$  max) – domestic water side (secondary)

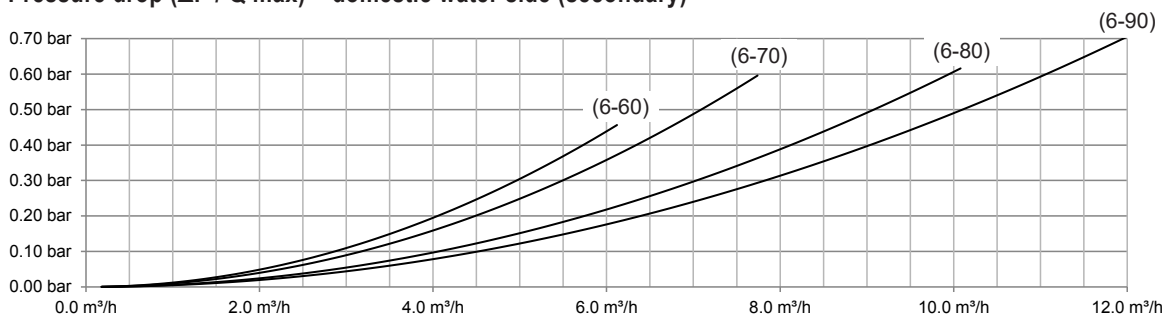


Circulating pump characteristic curves

for circulation set 3/4"


$\Delta p-v$  (variable)

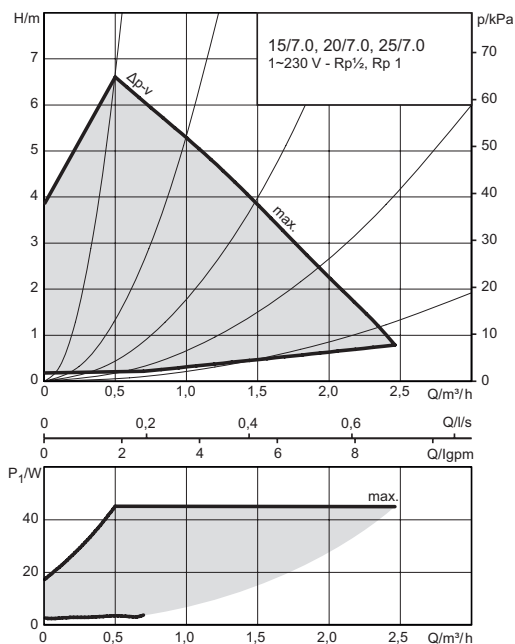

Constant speed



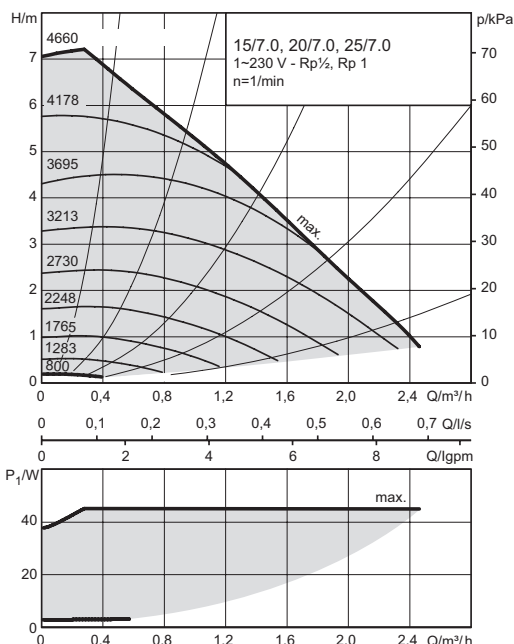


for circulation set 1" and 1¼"

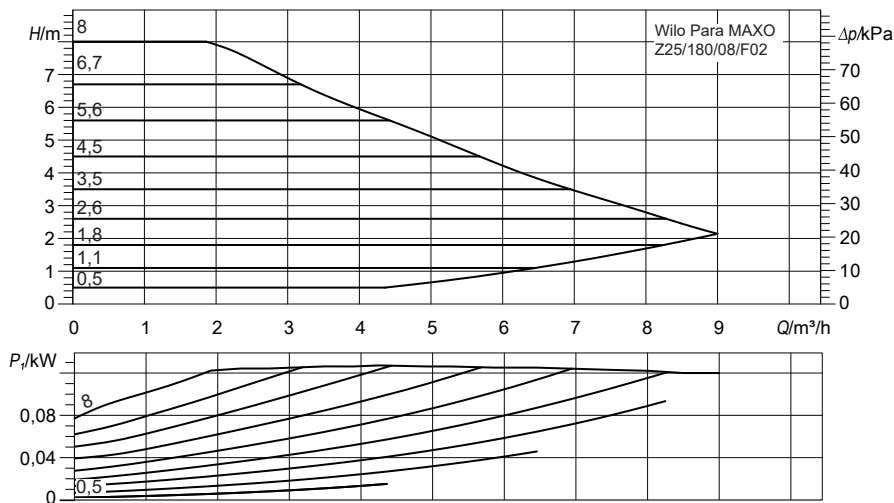


**Fresh water module TransTherm® aqua F (6-60)**  
(Dimensions in mm)

**\* For application according to the SVGW**  
The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

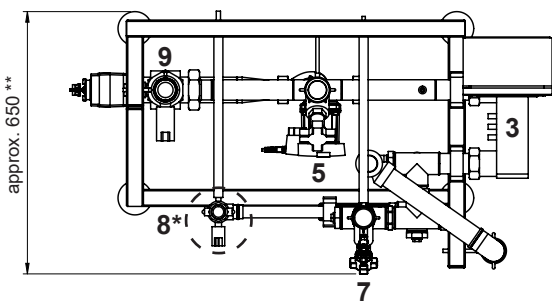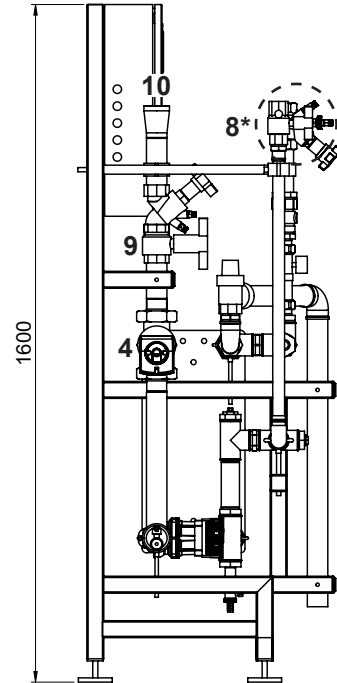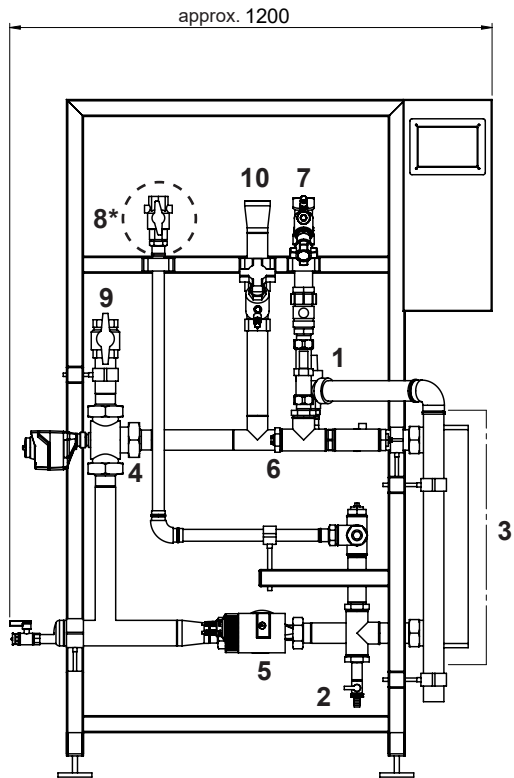

**Version incl. circulation set**

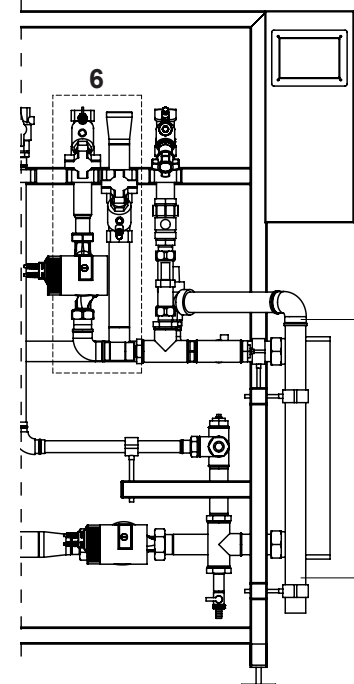




\*\* With circulation 680

TransTherm® aqua F (6-60)	Weight in kg
	123


- 1 Safety valve  
Hot water 10 bar
  - 2 Filling/drain valve
  - 3 Heat exchanger
  - 4 Three-way valve
  - 5 Circulating pump
  - 6 Circulation <sup>1)</sup> DN 32, Rp 1¼" (DN 25, Rp 1") (IT)
  - 7 Cold water DN 32, Rp 1¼" (IT)
  - 8\* Hot water DN 32, Rp 1¼" (IT)
  - 9 Flow heating water DN 40, Rp 1½" (IT)
  - 10 Return heating water DN 40, Rp 1½" (IT)
- <sup>1)</sup> Optional, connection and installation on site

Fresh water module TransTherm® aqua F (6-70)  
(Dimensions in mm)

\* For application according to the SVGW  
The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

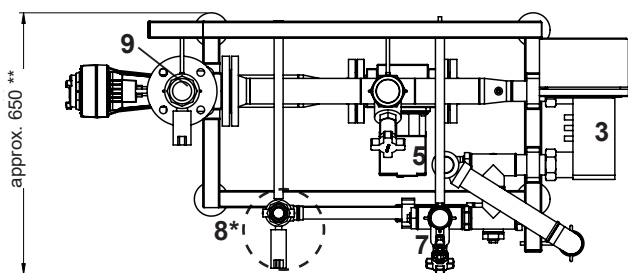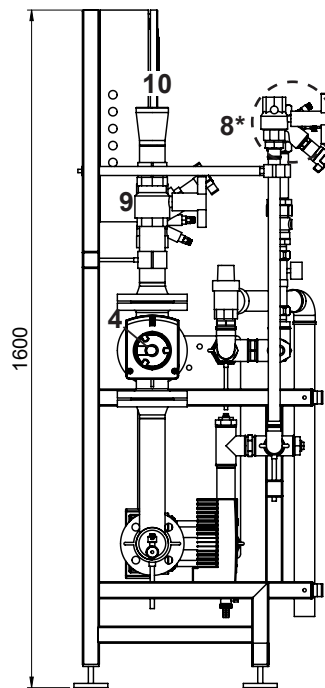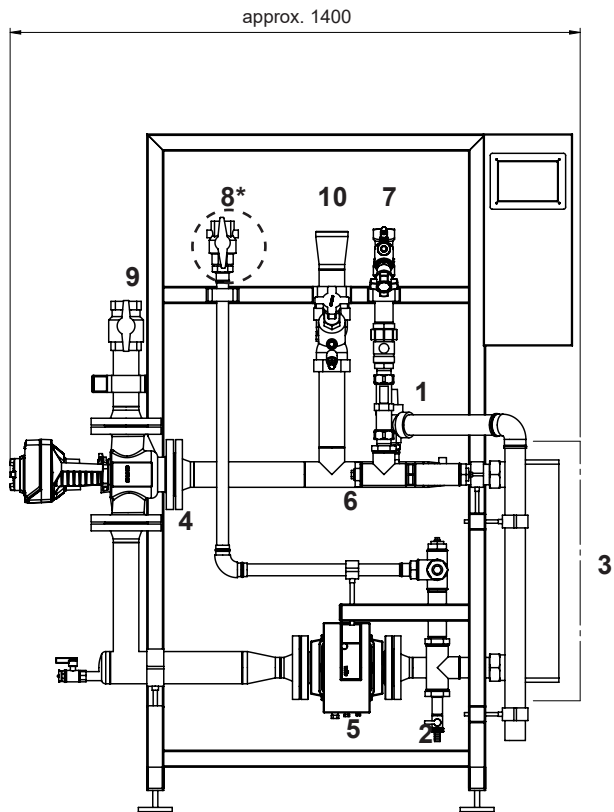

Version incl. circulation set

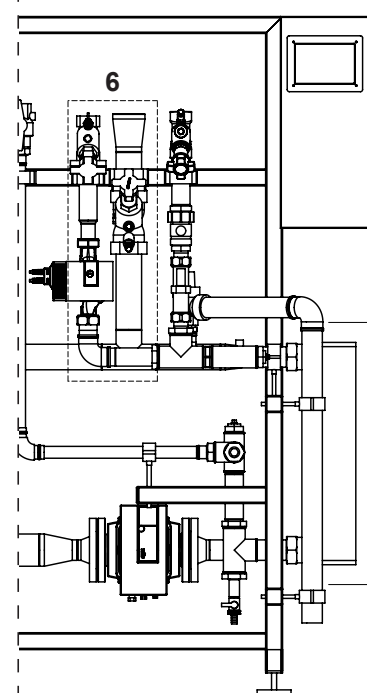



\*\* With circulation 680

TransTherm® aqua F (6-70)	Weight in kg
	172


- 1 Safety valve  
Hot water 10 bar
  - 2 Filling/drain valve
  - 3 Heat exchanger
  - 4 Three-way valve
  - 5 Circulating pump
  - 6 Circulation <sup>1)</sup> DN 32, Rp 1 1/4" (DN 25, Rp 1") (IT)
  - 7 Cold water DN 32, Rp 1 1/4" (IT)
  - 8\* Hot water DN 32, Rp 1 1/4" (IT)
  - 9 Flow heating water DN 50, Rp 2" (IT)
  - 10 Return heating water DN 50, Rp 2" (IT)
- <sup>1)</sup> Optional, connection and installation on site

**Fresh water module TransTherm® aqua F (6-80)**  
(Dimensions in mm)

**\* For application according to the SVGW**  
The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

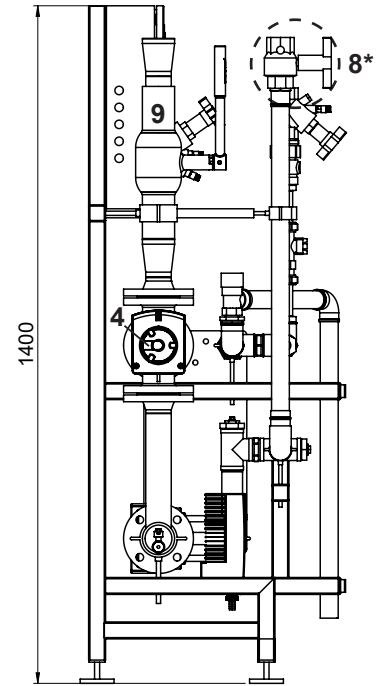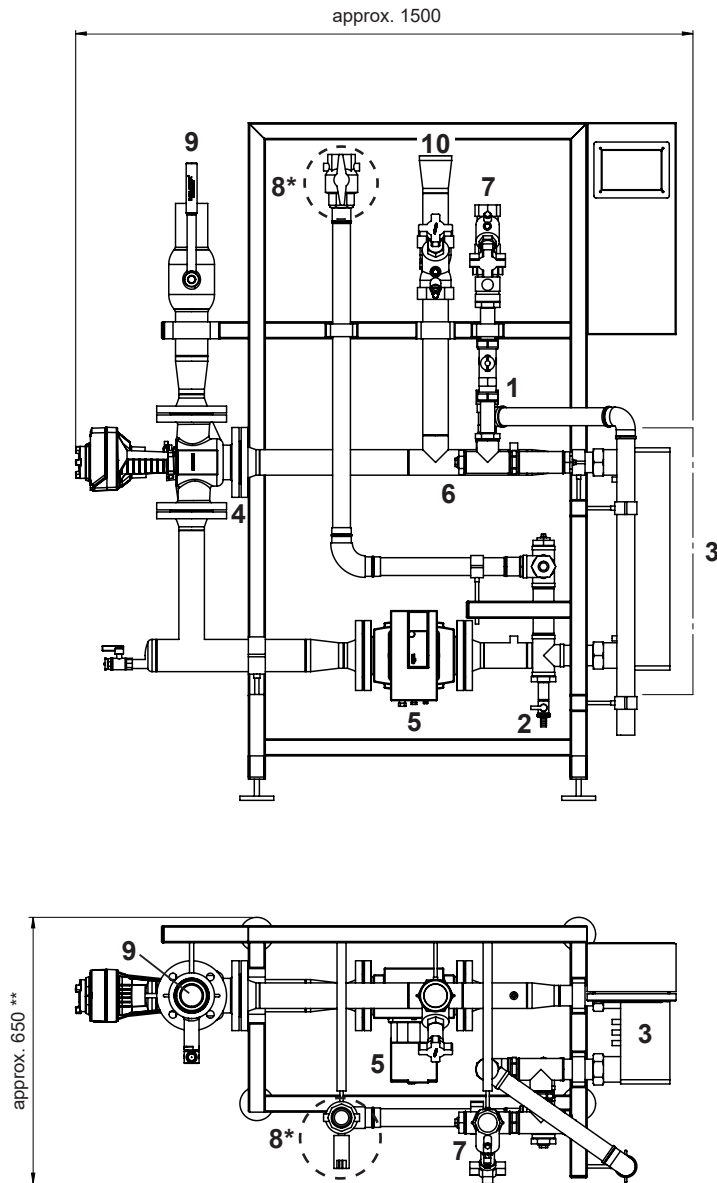

Version incl. circulation set

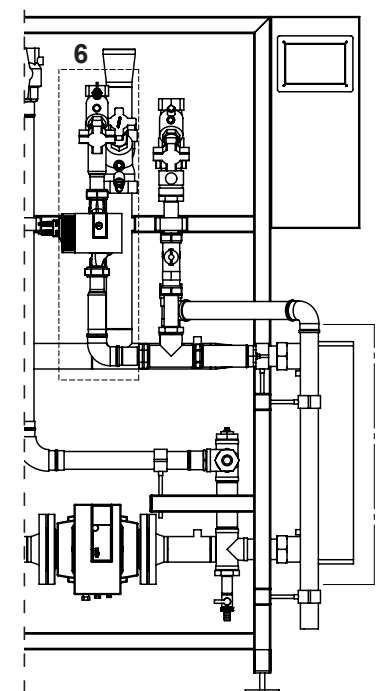




\*\* With circulation 680

TransTherm® aqua F	Weight in kg
(6-80)	202


- 1 Safety valve  
Hot water 10 bar
  - 2 Filling/drain valve
  - 3 Heat exchanger
  - 4 Three-way valve
  - 5 Circulating pump
  - 6 Circulation <sup>1)</sup> DN 32, Rp 1¼" (DN 25, Rp 1") (IT)
  - 7 Cold water DN 40, Rp 1½" (IT)
  - 8\* Hot water DN 40, Rp 1½" (IT)
  - 9 Flow heating water DN 65 AE (weld-on end)
  - 10 Return heating water DN 65 AE (weld-on end)
- <sup>1)</sup> Optional, connection and installation on site

Fresh water module TransTherm® aqua F (6-90)  
(Dimensions in mm)

\* For application according to the SVGW  
The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

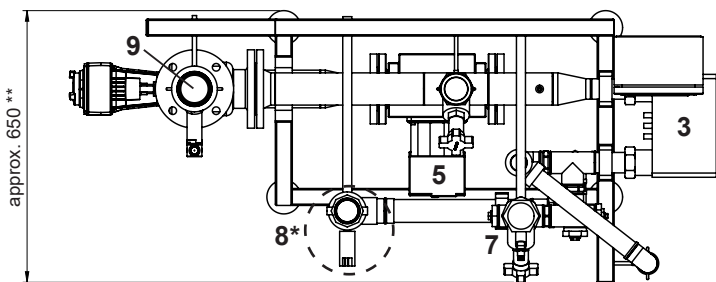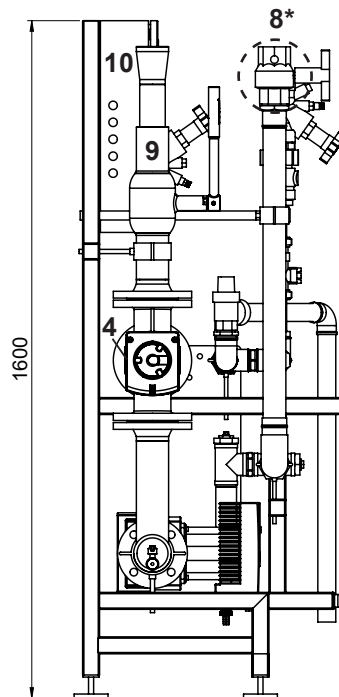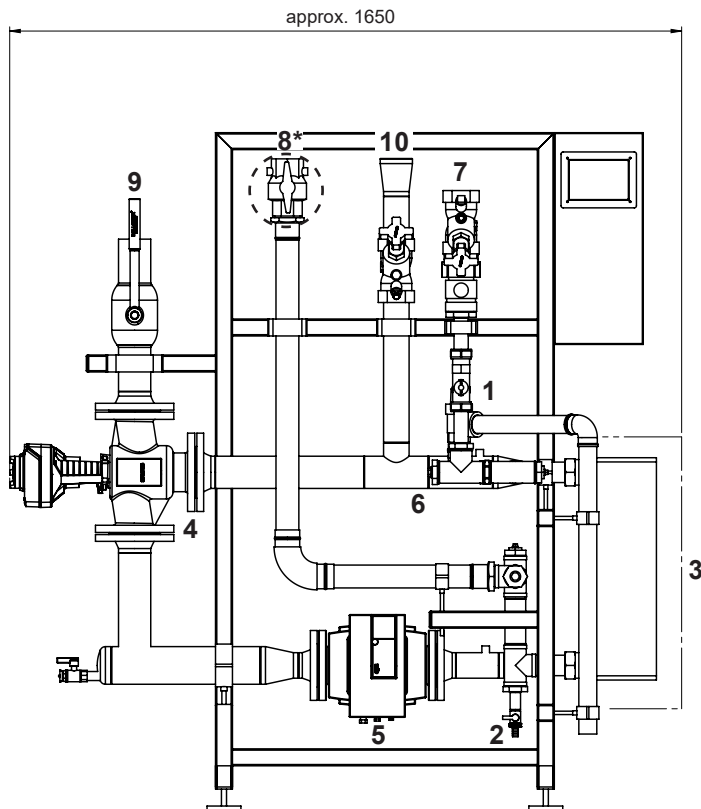

Version incl. circulation set

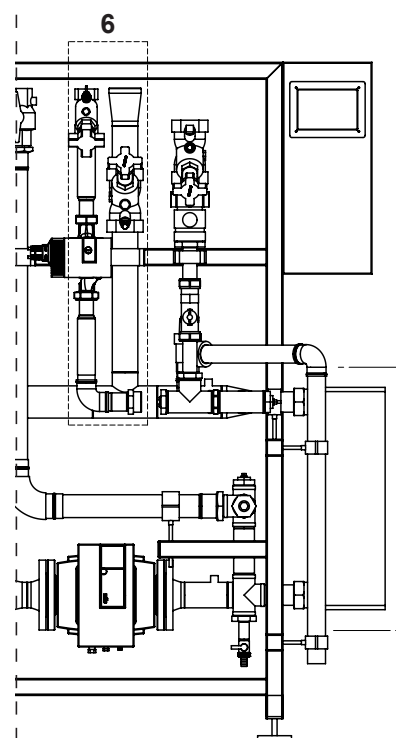


\*\* With circulation 700

TransTherm® aqua F	Weight in kg
(6-90)	214

- 1 Safety valve  
Hot water 10 bar
  - 2 Filling/drain valve
  - 3 Heat exchanger
  - 4 Three-way valve
  - 5 Circulating pump
  - 6 Circulation <sup>1)</sup> DN 32, Rp 1¼" (DN 25, Rp 1") (IT)
  - 7 Cold water DN 50, Rp 2" (IT)
  - 8\* Hot water DN 50, Rp 2" (IT)
  - 9 Flow heating water DN 65 AE (weld-on end)
  - 10 Return heating water DN 65 AE (weld-on end)
- <sup>1)</sup> Optional, connection and installation on site

**Water heating**  
TransTherm® aqua F

**\* For application according to the SVGW**  
The installation of ball valves is not permitted in Switzerland according to SVGW regulation W3.

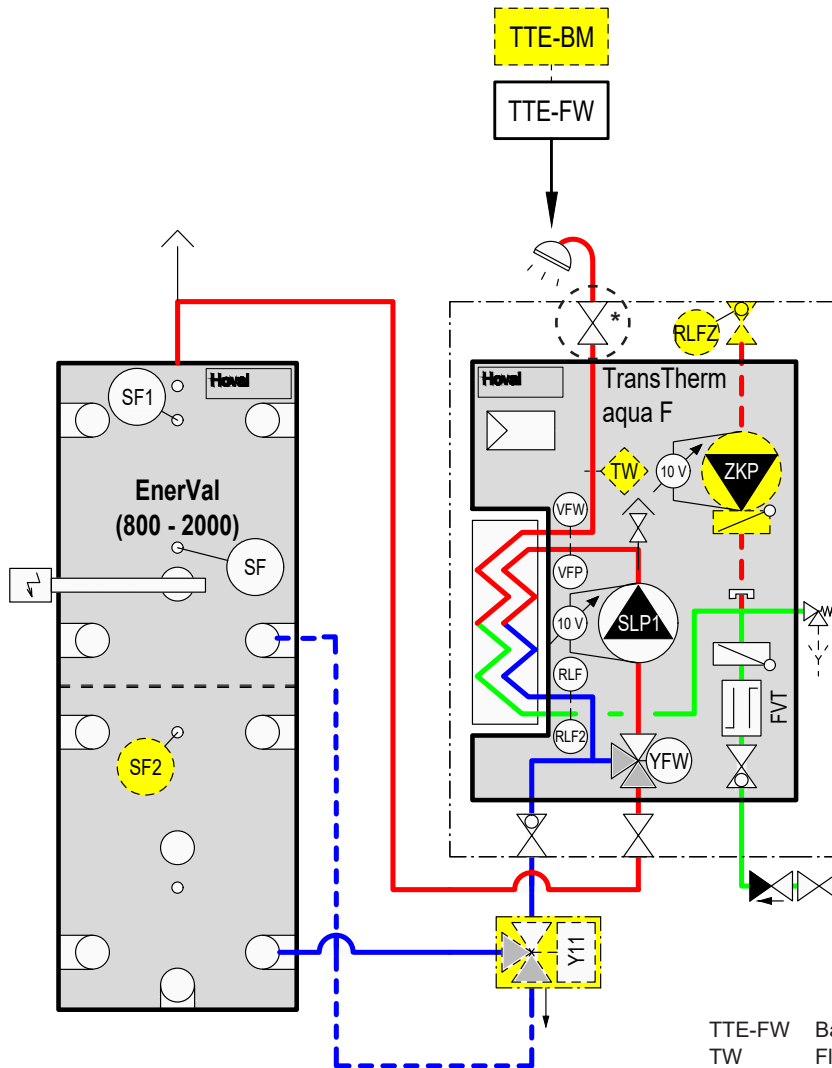

- TTE-FW Basic module district heating/fresh water
  - TW Flow temperature monitor (if required)
  - VFP Flow sensor primary
  - VFW Flow sensor DHW
  - RLF Return sensor primary
  - RLF2 Return sensor domestic cold water
  - SF Calorifier sensor
  - SF1 Calorifier sensor 1
  - RLFZ Circulation sensor
  - SLP1 Calorifier charging pump primary
  - FVT Flow rate sensor
  - YFW Three-way valve with actuator
  - ZKP Recirculation pump
  - Y11 Return switching with actuator
- Option*
- BM TopTronic® E control module
  - SF2 Calorifier sensor 2

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com


### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval TransTherm<sup>®</sup> aqua

Calorifier continuous flow system

TransTherm<sup>®</sup> aqua FS (7-10)-(7-90)

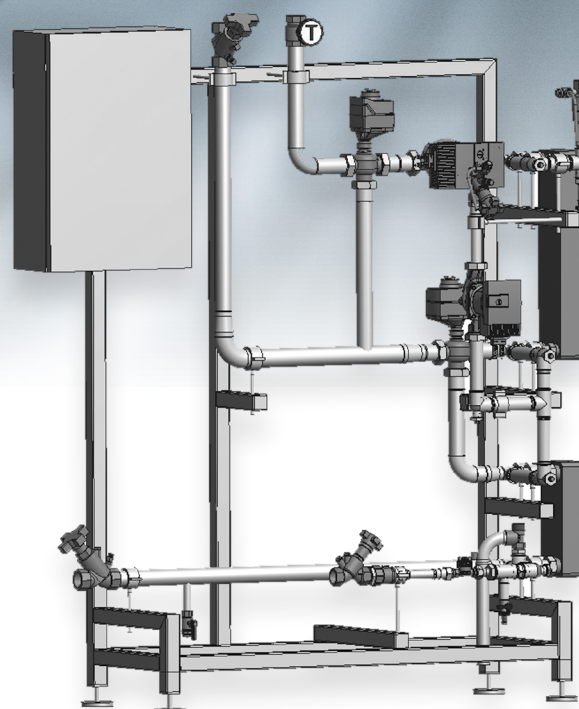



**Table of contents**

■ Description	5
■ Part numbers	7
■ Technical data	10
■ Dimensions	18
■ Example	20



**Calorifier continuous flow system**

Consisting of:

- fresh water module TransTherm® aqua FS
- buffer storage tank (option)

**Fresh water module TransTherm® aqua FS**

Consisting of:

Charging circuit flow:

- ball valve with thermometer handle
- three-way valve
- drive Siemens SAT 61 (0-10 V)
- Stratos pump
- sleeve for cable sensor M10 x 1
- sleeve for AGFW sensor

Charging circuit high temperature return:

- flow rate limiter Hydrocontrol VTR
- test port OVENTROP set 2
- three-way valve
- drive Siemens SAT 61 (0-10 V)
- sleeve for cable sensor M10 x 1
- sleeve for AGFW sensor

Charging circuit low temperature return:

- flow rate limiter Hydrocontrol VTR
- test port OVENTROP set 2
- ball valve WESA 1533
- sleeve for cable sensor M10 x 1
- sleeve for AGFW sensor

Heat exchanger supplementary heater:

- plate heat exchanger DANFOSS

Heat exchanger preheater:

- plate heat exchanger DANFOSS

Domestic hot water DHW:

- ball valve OVENTROP Optibal TW
- bimetallic thermometer OVENTROP TW
- sampling valve OVENTROP Aquastrom P (optional)
- ball valve OVENTROP
- sleeve for AGFW sensor

Domestic hot water circulation DHWC:

- flow rate limiter Aquastrom
- sampling valve OVENTROP Aquastrom P
- measurement nozzle OVENTROP
- circulating pump
- non-return valve TS73S
- sleeve for AGFW sensor

Domestic water DW:


- flow rate limiter Aquastrom C
- non-return valve ROSSWEINER
- adapter
- flow rate sensor HUBA
- ball valve OVENTROP
- sleeve for AGFW sensor
- diaphragm safety valve

Control panel control system:

- control panel casing SCHNEIDER
- control TTE-FW
- fuses
- sockets
- terminals

Stand frame:

- frame with corrosion protection coating RAL 9005
- height-adjustable and vibration-damped feet

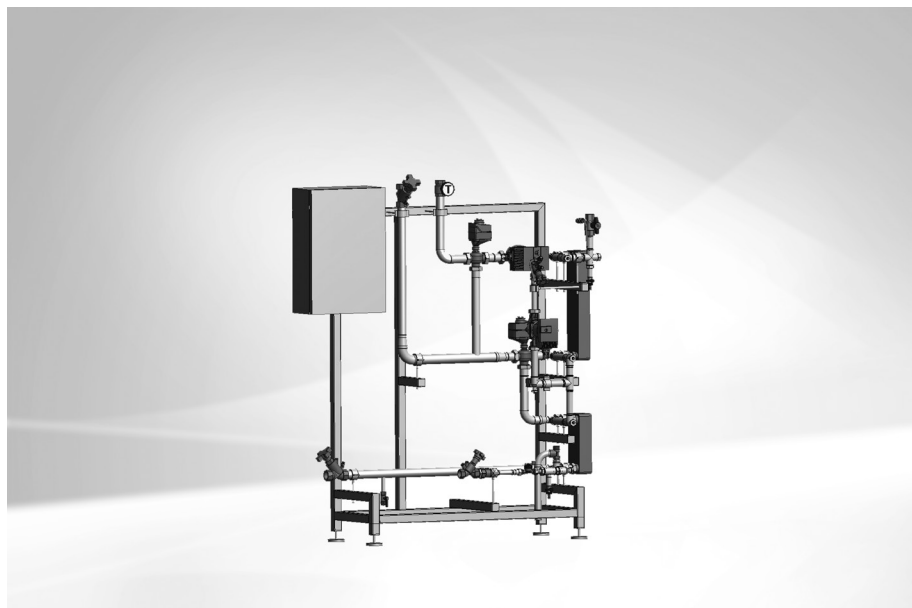

**Delivery time on request**

**Range**

Fresh water module

TransTherm® aqua FS type	Output kW
(7-10)	50
(7-16)	90
(7-20)	130
(7-30)	175
(7-40)	220
(7-50)	275
(7-60)	358
(7-70)	453
(7-80)	569
(7-90)	717

Thermal insulation:

- thermal insulation of the heat exchanger with 30 mm EPP mouldings
- thermal insulation of the pipes with EPP mouldings. insulation thickness of 50 % according to EnEV
- deep black, similar to RAL 9005
- suitable for damp rooms
- CFC-free
- normal flammability according to DIN 4102-1 and EN 13501-1 (fuel class: B2)
- no bleaching or disintegration of the insulation under the influence of UV

*Delivery*

- The buffer storage tank required is not included in the scope of delivery

*On site*

- Electrical connection of the controller

**Suitable buffer storage tanks**  
 see separate chapter

*TopTronic® E controller*

*TopTronic® E basic module*  
*District heating/fresh water*

- Control unit for controlling district heating transfer stations in non-communicative networks and the corresponding consumers with integrated control functions for
  - primary valve control
  - cascade management
  - 1 heating circuit with mixer
  - 1 heating circuit without mixer
  - 1 hot water charging circuit
  - various additional functions
- Various functions for domestic hot water:
  - selection of different basic programs (week programs, eco mode, holiday, etc.)
  - various operating modes (e.g. accumulator priority or parallel mode)
  - buffer storage circuit on the primary or secondary side
  - adjustable loading criteria (e.g. adjustable loading times, undershooting the minimum nominal value, etc.)
  - adjustable switch-off criteria (e.g. achieving the set value, achieving the lower sensor set value, etc.)
  - adjustable loading block (if the loading flow temperature is too low, the setpoint temperature is not reached, differential temperature-dependent solar circuit control)

- Definable switching times for circulating pump control
- Outdoor sensor
- Immersion sensor (calorifier sensor)
- Contact sensor (flow temperature sensor)
- Complete plug set for district heating module
- Speed-controlled pumps

**No further module expansions or controller modules can be installed in the control panel!**

#### Option

##### *TopTronic® E control module*

- Simple, intuitive operating concept
- Display of the most important operating states
- Configurable start screen
- Operating mode selection
- Configurable day and week programmes
- Operation of all connected Hoval CAN bus modules
- Commissioning wizard
- Service and maintenance function
- Fault message management
- Analysis function
- Weather display (with HovalConnect option)
- Adaptation of the heating strategy based on the weather forecast (with HovalConnect option)

#### Notice

The TopTronic® E control module for operating the basic module district heating/fresh water must be ordered separately!

**For further information about the TopTronic® E, see "Controls"**


#### Delivery

- Incl. thermometer, non-return valves, cut-off ball valves on the domestic water side
- All fittings required for operation, such as strainers, flow balancing and shut-off valves, non-return valves, air vent and drain valve are fitted

#### Caution

As a result of thermal disinfection of the domestic hot water for legionella protection, increased water temperatures (at least 65 ... 70 °C) occur. Depending on the water quality, this may result in increased calcification at the installed fittings and heat exchangers and also brings the risk of scalding at the tapping points. Corresponding protective measures must be implemented on site.

**Calorifier fresh water module**

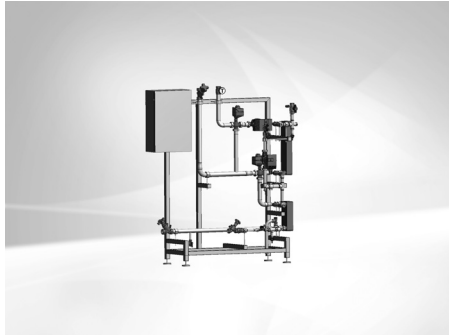

Delivery time on request

**TransTherm® aqua FS**

Fully assembled station with 2 plate heat exchangers for the provision of domestic hot water using the continuous flow principle and built-in Hoval TopTronic® E control. The buffer storage tanks required for this are not included in the scope of delivery.

TransTherm® aqua FS	Output kW	Part No.
(7-10)	50	8008 017
(7-16)	90	8008 018
(7-20)	130	8008 019
(7-30)	175	8008 020
(7-40)	220	8008 021
(7-50)	275	8008 022
(7-60)	358	8008 023
(7-70)	453	8008 024
(7-80)	569	8008 025
(7-90)	717	8008 026


**Version with copper-free heat exchanger**

Delivery time on request

**TransTherm® aqua FS**

with copper-free heat exchanger

TransTherm® aqua FS	Output kW	Part No.
(7-10)	50	8008 027
(7-16)	90	8008 028
(7-20)	130	8008 029
(7-30)	175	8008 030
(7-40)	220	8008 031



**TopTronic® E control module black with 4.3" colour touchscreen**

For operation of all controller modules connected to the bus system (basic, solar, buffer modules etc.) Connection to the Hoval bus system via RJ45 plug connection or via plug terminals (max. 0.75 mm²), flat design with flexible installation option

Installation:

- in control panel of the heat generator
- in the Hoval wall casing
- in the control panel front, black high-gloss cover, customer-specific configurable start screen,

Display of current weather or weather forecast (only possible in combination with HovalConnect)

Consisting of:

- TopTronic® E control module black
- Clamping device set control module
- RJ45-RAST 5 CAN cable, L = 500

**Part No.**

6043 844



**Test valve DN 8 G 1/4"**

for TransTherm® aqua L, L-FW, F, FS Test valve suitable for flame treatment for hygienic-microbiologic tests.

2049 861



**Sludge separator DM with magnet**

made of technopolymer (PO) or brass with insulation (MS)

Type	Connection	Flow rate	k <sub>v</sub> value	
		at 1.2 m/s flow speed	m <sup>3</sup> /h	
	inches	m <sup>3</sup> /h	m <sup>3</sup> /h	
DM PO	Rp 1"	1.3	10.5	2054 376
DM PO	Rp 1 1/4"	2.1	10.5	2085 523
DM MS	Rp 1 1/2"	5.4	63.2	2085 527
DM MS	Rp 2"	8.2	70.0	2085 528

**Additional sludge separators**  
see "Various system components"



**Insulation for sludge separator DM PO 1"**

10 mm insulating caps made of PE-X foam Thermal conductivity 0.035 W/mK Fire resistance (DIN 4102): class B2

2085 524



**Insulation for sludge separator DM PO 1 1/4"**

10 mm insulating caps made of PE-X foam Thermal conductivity 0.035 W/mK Fire resistance (DIN 4102): class B2

2086 031

Part No.



**Temperature monitor 0 ... 120 °C**  
for TransTherm® aqua L, L-FW, F, FS

2048 299



**Safety temperature monitor 70 ... 130 °C**  
for TransTherm® aqua L, L-FW, F, FS

2048 300



**Safety temperature limiter 70 ... 130 °C**  
for TransTherm® aqua L, L-FW, F, FS

2049 619



**Immersion sleeve G 1/2" stainless steel for thermostat**  
for TransTherm® aqua L, L-FW, F, FS  
Installation length = 100 mm  
Outer Ø: 8 mm, inner Ø: 6.5 mm

2048 285



**Immersion sleeve G 1/2" stainless steel for 2 thermostats**  
for TransTherm® aqua L, L-FW, F, FS  
Installation length = 100 mm  
Outer Ø: 15 mm, inner Ø: 13.5 mm

2048 288

Services



**Services and associated scope of services**  
see separate catalogue "Hoval Services"

Commissioning by Hoval customer service is a prerequisite for warranty/guarantee activation.

Performance data

TransTherm® aqua FS (7-10 to 7-50)

Domestic water secondary			Flow temperature heating water												
			55 °C (6-...)						60 °C (6-...)						
			(10)	(16)	(20)	(30)	(40)	(50)	(10)	(16)	(20)	(30)	(40)	(50)	
60/5 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṽ primary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-
60/10 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṽ primary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-
60/15 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṽ primary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-
60/20 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-
	<b>Ṽ primary</b>	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-
55/5 °C	T return primary	°C	-	-	-	-	-	-	30	30	30	30	30	30	30
	<b>Ṽ primary</b>	m³/h	-	-	-	-	-	-	1.25	2.04	2.51	3.71	4.76	5.66	6.66
	Q max.	kW	-	-	-	-	-	-	43	70	86	127	163	194	235
55/10 °C	T return primary	°C	-	-	-	-	-	-	30	30	30	30	30	30	30
	<b>Ṽ primary</b>	m³/h	-	-	-	-	-	-	1.11	2.04	2.51	3.71	4.76	5.63	6.63
	Q max.	kW	-	-	-	-	-	-	38	70	86	127	163	193	235
55/15 °C	T return primary	°C	-	-	-	-	-	-	30	30	30	30	30	30	30
	<b>Ṽ primary</b>	m³/h	-	-	-	-	-	-	0.76	1.46	1.95	3.06	4.23	5.4	6.6
	Q max.	kW	-	-	-	-	-	-	26	50	67	105	145	185	235
55/20 °C	T return primary	°C	-	-	-	-	-	-	30	30	30	30	30	30	30
	<b>Ṽ primary</b>	m³/h	-	-	-	-	-	-	0.47	0.9	1.17	1.9	2.63	3.36	4.1
	Q max.	kW	-	-	-	-	-	-	16	31	40	65	90	115	145
50/5 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>Ṽ primary</b>	m³/h	1.29	2.03	2.51	3.67	4.72	5.66	1.28	2.04	2.51	3.71	4.76	5.63	6.63
	Q max.	kW	37	58	72	105	135	162	44	70	86	127	163	193	235
50/10 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>Ṽ primary</b>	m³/h	1.29	2.03	2.51	3.67	4.72	5.66	1.28	2.04	2.51	3.73	4.81	5.69	6.69
	Q max.	kW	38	58	72	105	135	162	44	70	86	128	165	195	235
50/15 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>Ṽ primary</b>	m³/h	1.29	2.03	2.51	3.67	4.72	5.66	1.11	1.95	2.48	3.76	4.76	5.69	6.69
	Q max.	kW	37	58	72	105	135	162	38	67	85	129	163	195	235
50/20 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>Ṽ primary</b>	m³/h	1.15	2.03	2.55	3.7	4.75	5.69	0.96	1.69	2.13	3.24	3.63	5.16	6.16
	Q max.	kW	33	58	73	106	136	163	33	58	73	111	145	177	217
45/5 °C	T return primary	°C	19	18	18	18	18	17	177	16	16	16	16	15	15
	<b>Ṽ primary</b>	m³/h	0.86	1.91	2.9	2.9	3.8	4.61	0.86	1.92	2.91	2.91	3.82	4.63	5.63
	Q max.	kW	35	80	123	123	162	199	42	95	145	145	192	235	285
45/10 °C	T return primary	°C	21	21	20	20	20	20	20	19	19	19	18	18	18
	<b>Ṽ primary</b>	m³/h	0.86	1.91	2.89	2.89	3.81	4.62	0.86	1.92	2.84	2.84	3.63	4.32	5.32
	Q max.	kW	33	74	114	114	151	185	39	89	133	133	172	207	257
45/15 °C	T return primary	°C	24	23	23	23	23	23	23	22	21	21	21	21	21
	<b>Ṽ primary</b>	m³/h	0.86	1.91	2.91	2.91	3.81	4.62	0.87	1.8	2.61	2.61	3.33	3.98	4.98
	Q max.	kW	30	69	106	106	139	170	37	78	115	115	148	178	228
45/20 °C	T return primary	°C	27	26	26	26	26	26	25	25	24	24	24	24	24
	<b>Ṽ primary</b>	m³/h	0.86	1.92	2.91	2.91	3.71	4.41	0.85	1.63	2.36	2.36	3.02	3.61	4.61
	Q max.	kW	27	63	96	96	124	148	33	65	96	96	123	148	198

T return primary °C Return temperature primary  
**Ṽ primary** m³/h Flow rate primary  
 Q max. kW Output  
**Ṽ secondary** m³/h Flow rate secondary

The specified technical data relate to the full load of the module in each case.

Performance data

TransTherm® aqua FS (7-10 to 7-50)

Flow temperature heating water

Domestic water secondary	TransTherm® aqua FS		65 °C (6-...)						70 °C (6-...)					
			(10)	(16)	(20)	(30)	(40)	(50)	(10)	(16)	(20)	(30)	(40)	(50)
			60/5 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>1.08</b>	<b>1.88</b>	<b>2.5</b>	<b>3.73</b>	<b>4.84</b>	<b>5.77</b>	<b>1.32</b>	<b>2.09</b>	<b>2.86</b>	<b>3.76</b>	<b>4.49</b>	<b>5.72</b>	<b>5.72</b>
	Q max. kW	43	75	100	149	193	230	60	95	133	171	209	260	260
	<b>V secondary</b> m³/h	<b>0.67</b>	<b>1.17</b>	<b>1.55</b>	<b>2.33</b>	<b>3.01</b>	<b>3.59</b>	<b>0.94</b>	<b>1.48</b>	<b>2.29</b>	<b>2.67</b>	<b>3.59</b>	<b>4.06</b>	<b>4.06</b>
60/10 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.8</b>	<b>1.5</b>	<b>2.01</b>	<b>3.16</b>	<b>4.34</b>	<b>5.39</b>	<b>1.08</b>	<b>1.94</b>	<b>2.80</b>	<b>3.77</b>	<b>4.73</b>	<b>5.92</b>	<b>5.92</b>
	Q max. kW	32	60	80	126	173	215	50	90	130	175	220	275	275
	<b>V secondary</b> m³/h	<b>0.55</b>	<b>1.03</b>	<b>1.38</b>	<b>2.17</b>	<b>2.98</b>	<b>3.7</b>	<b>0.86</b>	<b>1.54</b>	<b>2.24</b>	<b>3.01</b>	<b>3.78</b>	<b>4.73</b>	<b>4.73</b>
60/15 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.55</b>	<b>1.05</b>	<b>1.38</b>	<b>2.13</b>	<b>3.08</b>	<b>3.96</b>	<b>0.97</b>	<b>1.8</b>	<b>2.37</b>	<b>3.73</b>	<b>4.84</b>	<b>5.72</b>	<b>5.72</b>
	Q max. kW	22	42	55	85	123	158	44	82	108	170	220	260	260
	<b>V secondary</b> m³/h	<b>0.42</b>	<b>0.8</b>	<b>1.05</b>	<b>1.63</b>	<b>2.35</b>	<b>3.02</b>	<b>0.84</b>	<b>1.57</b>	<b>2.08</b>	<b>3.24</b>	<b>4.21</b>	<b>4.98</b>	<b>4.98</b>
60/20 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.3</b>	<b>0.6</b>	<b>0.8</b>	<b>1.28</b>	<b>1.75</b>	<b>2.33</b>	<b>0.62</b>	<b>1.14</b>	<b>2.05</b>	<b>2.4</b>	<b>3.43</b>	<b>4.22</b>	<b>4.22</b>
	Q max. kW	12	24	32	51	70	93	28	52	68	109	156	192	192
	<b>V secondary</b> m³/h	<b>0.26</b>	<b>0.52</b>	<b>0.69</b>	<b>1.1</b>	<b>1.51</b>	<b>2</b>	<b>0.6</b>	<b>1.12</b>	<b>1.47</b>	<b>2.36</b>	<b>3.36</b>	<b>4.14</b>	<b>4.14</b>
55/5 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.8</b>	<b>1.5</b>	<b>2.01</b>	<b>3.16</b>	<b>4.34</b>	<b>5.39</b>	<b>1.08</b>	<b>2.09</b>	<b>2.53</b>	<b>3.74</b>	<b>4.84</b>	<b>5.76</b>	<b>5.76</b>
	Q max. kW	32	60	80	126	173	215	50	95	115	170	220	262	262
	<b>V secondary</b> m³/h	<b>0.55</b>	<b>1.03</b>	<b>1.38</b>	<b>2.17</b>	<b>2.98</b>	<b>3.7</b>	<b>0.86</b>	<b>1.63</b>	<b>1.97</b>	<b>2.92</b>	<b>3.78</b>	<b>4.5</b>	<b>4.5</b>
55/10 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>1.3</b>	<b>2.06</b>	<b>2.53</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>1.08</b>	<b>1.87</b>	<b>2.42</b>	<b>3.74</b>	<b>4.84</b>	<b>5.72</b>	<b>5.72</b>
	Q max. kW	52	82	101	148	192	225	49	85	110	170	220	260	260
	<b>V secondary</b> m³/h	<b>0.99</b>	<b>1.57</b>	<b>1.93</b>	<b>2.83</b>	<b>3.67</b>	<b>4.3</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.24</b>	<b>4.21</b>	<b>4.98</b>	<b>4.98</b>
55/15 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.97</b>	<b>1.65</b>	<b>2.11</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>1.1</b>	<b>1.88</b>	<b>2.41</b>	<b>3.74</b>	<b>4.22</b>	<b>5.1</b>	<b>5.1</b>
	Q max. kW	44	75	96	148	192	225	44	75	96	148	192	232	232
	<b>V secondary</b> m³/h	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>4.84</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.19</b>	<b>4.21</b>	<b>5</b>	<b>5</b>
55/20 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.95</b>	<b>1.68</b>	<b>2.13</b>	<b>3.23</b>	<b>4.24</b>	<b>5.14</b>	<b>0.84</b>	<b>1.47</b>	<b>1.87</b>	<b>2.84</b>	<b>3.72</b>	<b>4.51</b>	<b>4.51</b>
	Q max. kW	38	67	85	129	169	205	38	67	85	129	169	205	205
	<b>V secondary</b> m³/h	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>	<b>5.05</b>
50/5 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>1.25</b>	<b>2.06</b>	<b>2.53</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>1.08</b>	<b>1.87</b>	<b>2.42</b>	<b>3.56</b>	<b>4.84</b>	<b>5.72</b>	<b>5.72</b>
	Q max. kW	50	82	101	148	192	225	49	85	110	162	220	260	260
	<b>V secondary</b> m³/h	<b>0.95</b>	<b>1.57</b>	<b>1.93</b>	<b>2.83</b>	<b>3.67</b>	<b>4.3</b>	<b>0.94</b>	<b>1.62</b>	<b>2.1</b>	<b>3.09</b>	<b>4.21</b>	<b>4.98</b>	<b>4.98</b>
50/10 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>1.1</b>	<b>1.88</b>	<b>2.41</b>	<b>3.71</b>	<b>4.81</b>	<b>5.64</b>	<b>0.97</b>	<b>1.65</b>	<b>2.11</b>	<b>3.25</b>	<b>4.22</b>	<b>5.1</b>	<b>5.1</b>
	Q max. kW	44	75	96	148	192	225	44	75	96	148	192	232	232
	<b>V secondary</b> m³/h	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>4.84</b>	<b>0.95</b>	<b>1.61</b>	<b>2.07</b>	<b>3.19</b>	<b>4.13</b>	<b>5</b>	<b>5</b>
50/15 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.95</b>	<b>1.68</b>	<b>2.13</b>	<b>3.23</b>	<b>4.24</b>	<b>5.14</b>	<b>0.84</b>	<b>1.47</b>	<b>1.87</b>	<b>2.84</b>	<b>3.72</b>	<b>4.51</b>	<b>4.51</b>
	Q max. kW	38	67	85	129	169	205	38	67	85	129	169	205	205
	<b>V secondary</b> m³/h	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>	<b>0.94</b>	<b>1.65</b>	<b>2.09</b>	<b>3.18</b>	<b>4.16</b>	<b>5.05</b>	<b>5.05</b>
50/20 °C	T return primary °C	30	30	30	30	30	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>0.83</b>	<b>1.45</b>	<b>1.81</b>	<b>2.44</b>	<b>3.63</b>	<b>4.44</b>	<b>0.73</b>	<b>1.28</b>	<b>1.61</b>	<b>2.44</b>	<b>3.19</b>	<b>3.89</b>	<b>3.89</b>
	Q max. kW	33	58	73	111	145	177	33	58	73	111	145	177	177
	<b>V secondary</b> m³/h	<b>0.95</b>	<b>1.67</b>	<b>2.1</b>	<b>3.19</b>	<b>4.17</b>	<b>5.09</b>	<b>0.95</b>	<b>1.67</b>	<b>2.1</b>	<b>3.19</b>	<b>4.17</b>	<b>5.09</b>	<b>5.09</b>
45/5 °C	T return primary °C	16	15	14	14	14	14	15	13	13	13	12	12	12
	<b>V primary</b> m³/h	<b>0.87</b>	<b>1.83</b>	<b>2.64</b>	<b>2.64</b>	<b>3.38</b>	<b>4.03</b>	<b>0.84</b>	<b>1.62</b>	<b>2.35</b>	<b>2.35</b>	<b>3.01</b>	<b>3.59</b>	<b>3.59</b>
	Q max. kW	48	104	152	152	196	236	52	104	152	152	196	236	236
	<b>V secondary</b> m³/h	<b>1.04</b>	<b>2.24</b>	<b>3.27</b>	<b>3.27</b>	<b>4.23</b>	<b>5.07</b>	<b>1.13</b>	<b>2.24</b>	<b>3.28</b>	<b>3.28</b>	<b>4.23</b>	<b>5.07</b>	<b>5.07</b>
45/10 °C	T return primary °C	19	17	17	17	17	16	17	16	16	16	15	15	15
	<b>V primary</b> m³/h	<b>0.87</b>	<b>1.69</b>	<b>2.45</b>	<b>2.45</b>	<b>3.13</b>	<b>3.73</b>	<b>0.77</b>	<b>1.49</b>	<b>2.17</b>	<b>2.17</b>	<b>2.78</b>	<b>3.32</b>	<b>3.32</b>
	Q max. kW	45	91	134	134	172	206	46	91	133	133	172	206	206
	<b>V secondary</b> m³/h	<b>1.13</b>	<b>2.25</b>	<b>3.30</b>	<b>3.30</b>	<b>4.24</b>	<b>5.09</b>	<b>1.13</b>	<b>2.24</b>	<b>3.29</b>	<b>3.29</b>	<b>4.24</b>	<b>5.09</b>	<b>5.09</b>
45/15 °C	T return primary °C	21	20	20	20	20	19	20	19	19	19	19	19	19
	<b>V primary</b> m³/h	<b>0.8</b>	<b>1.55</b>	<b>2.24</b>	<b>2.24</b>	<b>2.87</b>	<b>3.43</b>	<b>0.71</b>	<b>1.36</b>	<b>1.98</b>	<b>1.98</b>	<b>2.54</b>	<b>3.03</b>	<b>3.03</b>
	Q max. kW	39	78	115	115	148	178	40	78	114	114	148	177	177
	<b>V secondary</b> m³/h	<b>1.14</b>	<b>2.27</b>	<b>3.31</b>	<b>3.31</b>	<b>4.26</b>	<b>5.11</b>	<b>1.16</b>	<b>2.26</b>	<b>3.30</b>	<b>3.30</b>	<b>4.26</b>	<b>5.10</b>	<b>5.10</b>
45/20 °C	T return primary °C	24	23	23	23	23	23	23	23	22	22	22	22	22
	<b>V primary</b> m³/h	<b>0.72</b>	<b>1.4</b>	<b>2.02</b>	<b>2.02</b>	<b>2.59</b>	<b>3.1</b>	<b>0.63</b>	<b>1.22</b>	<b>1.78</b>	<b>1.78</b>	<b>2.29</b>	<b>2.73</b>	<b>2.73</b>
	Q max. kW	33	66	96	96	123	148	33	65	96	96	124	148	148
	<b>V secondary</b> m³/h	<b>1.16</b>	<b>2.29</b>	<b>3.32</b>	<b>3.32</b>	<b>4.28</b>	<b>5.13</b>	<b>1.15</b>	<b>2.27</b>	<b>3.32</b>	<b>3.32</b>	<b>4.29</b>	<b>5.13</b>	<b>5.13</b>

T return primary °C Return temperature primary  
**V primary** m³/h Flow rate primary  
 Q max. kW Output  
**V secondary** m³/h Flow rate secondary  
**The specified technical data relate to the full load of the module in each case.**

Performance data

TransTherm® aqua FS (7-60 to 7-90)

			Flow temperature heating water											
			52 °C				55 °C				60 °C			
Domestic water secondary	TransTherm® aqua FS		(60)	(70)	(80)	(90)	(60)	(70)	(80)	(90)	(60)	(70)	(80)	(90)
60/5 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	Ṁ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-
	Ṁ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
60/10 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	Ṁ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-
	Ṁ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
60/15 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	Ṁ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-
	Ṁ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
60/20 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-
	Ṁ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-
	Ṁ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-
55/5 °C	T return primary	°C	-	-	-	-	-	-	-	-	28	28	28	27
	Ṁ primary	m³/h	-	-	-	-	-	-	-	-	<b>7.27</b>	<b>10.06</b>	<b>12.62</b>	<b>15.81</b>
	Q max.	kW	-	-	-	-	-	-	-	-	270	370	470	600
	Ṁ secondary	m³/h	-	-	-	-	-	-	-	-	<b>4.68</b>	<b>6.42</b>	<b>8.15</b>	<b>10.4</b>
55/10 °C	T return primary	°C	-	-	-	-	-	-	-	-	30	29	29	29
	Ṁ primary	m³/h	-	-	-	-	-	-	-	-	<b>7.30</b>	<b>9.04</b>	<b>11.82</b>	<b>14.63</b>
	Q max.	kW	-	-	-	-	-	-	-	-	255	320	420	530
	Ṁ secondary	m³/h	-	-	-	-	-	-	-	-	<b>4.91</b>	<b>6.17</b>	<b>8.09</b>	<b>10.21</b>
55/15 °C	T return primary	°C	-	-	-	-	-	-	-	-	30	30	30	30
	Ṁ primary	m³/h	-	-	-	-	-	-	-	-	<b>5.20</b>	<b>7.23</b>	<b>9.25</b>	<b>13.01</b>
	Q max.	kW	-	-	-	-	-	-	-	-	180	250	320	450
	Ṁ secondary	m³/h	-	-	-	-	-	-	-	-	<b>3.90</b>	<b>5.42</b>	<b>6.94</b>	<b>9.75</b>
55/20 °C	T return primary	°C	-	-	-	-	-	-	-	-	30	30	30	30
	Ṁ primary	m³/h	-	-	-	-	-	-	-	-	<b>3.18</b>	<b>4.34</b>	<b>5.78</b>	<b>7.51</b>
	Q max.	kW	-	-	-	-	-	-	-	-	110	150	200	260
	Ṁ secondary	m³/h	-	-	-	-	-	-	-	-	<b>2.73</b>	<b>3.72</b>	<b>4.95</b>	<b>6.44</b>
50/5 °C	T return primary	°C	-	-	-	-	25	25	25	24	22	22	21	21
	Ṁ primary	m³/h	-	-	-	-	<b>7.32</b>	<b>8.93</b>	<b>11.59</b>	<b>14.69</b>	<b>7.17</b>	<b>9.14</b>	<b>11.65</b>	<b>13.93</b>
	Q max.	kW	-	-	-	-	250	310	405	520	315	405	520	630
	Ṁ secondary	m³/h	-	-	-	-	<b>4.82</b>	<b>5.97</b>	<b>7.80</b>	<b>10.02</b>	<b>6.07</b>	<b>7.80</b>	<b>10.02</b>	<b>12.14</b>
50/10 °C	T return primary	°C	-	-	-	-	27	27	27	26	24	24	24	23
	Ṁ primary	m³/h	-	-	-	-	<b>7.17</b>	<b>8.95</b>	<b>11.64</b>	<b>14.45</b>	<b>6.78</b>	<b>8.62</b>	<b>11.52</b>	<b>13.16</b>
	Q max.	kW	-	-	-	-	230	290	380	480	280	360	485	560
	Ṁ secondary	m³/h	-	-	-	-	<b>4.99</b>	<b>6.29</b>	<b>8.24</b>	<b>10.4</b>	<b>6.07</b>	<b>7.80</b>	<b>10.51</b>	<b>12.14</b>
50/15 °C	T return primary	°C	-	-	-	-	29	29	29	28	26	26	26	26
	Ṁ primary	m³/h	-	-	-	-	<b>7.25</b>	<b>9.24</b>	<b>11.63</b>	<b>14.5</b>	<b>6.31</b>	<b>8.10</b>	<b>10.97</b>	<b>12.35</b>
	Q max.	kW	-	-	-	-	215	275	350	445	245	315	430	490
	Ṁ secondary	m³/h	-	-	-	-	<b>5.33</b>	<b>6.81</b>	<b>8.67</b>	<b>11.02</b>	<b>6.07</b>	<b>7.80</b>	<b>10.65</b>	<b>12.14</b>
50/20 °C	T return primary	°C	-	-	-	-	30	30	30	30	30	29	29	29
	Ṁ primary	m³/h	-	-	-	-	<b>5.03</b>	<b>6.59</b>	<b>9.02</b>	<b>11.96</b>	<b>6.00</b>	<b>7.6</b>	<b>10.35</b>	<b>11.6</b>
	Q max.	kW	-	-	-	-	145	190	260	345	210	270	370	420
	Ṁ secondary	m³/h	-	-	-	-	<b>4.20</b>	<b>5.49</b>	<b>7.51</b>	<b>9.97</b>	<b>6.07</b>	<b>7.80</b>	<b>10.69</b>	<b>12.14</b>
45/5 °C	T return primary	°C	21	21	21	20	20	19	19	19	18	18	18	17
	Ṁ primary	m³/h	<b>7.20</b>	<b>8.95</b>	<b>11.53</b>	<b>14.54</b>	<b>6.90</b>	<b>8.77</b>	<b>11.62</b>	<b>13.4</b>	<b>5.77</b>	<b>7.36</b>	<b>10.00</b>	<b>11.26</b>
	Q max.	kW	255	320	415	530	280	360	480	560	280	360	490	560
	Ṁ secondary	m³/h	<b>5.53</b>	<b>6.94</b>	<b>9.00</b>	<b>11.50</b>	<b>6.07</b>	<b>7.80</b>	<b>10.4</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.62</b>	<b>12.14</b>
45/10 °C	T return primary	°C	23	23	23	23	22	22	22	21	20	20	20	19
	Ṁ primary	m³/h	<b>7.12</b>	<b>9.21</b>	<b>11.51</b>	<b>14.45</b>	<b>6.44</b>	<b>8.23</b>	<b>11.13</b>	<b>12.57</b>	<b>5.36</b>	<b>6.86</b>	<b>9.27</b>	<b>7.24</b>
	Q max.	kW	235	305	385	490	245	315	430	490	245	315	430	490
	Ṁ secondary	m³/h	<b>5.82</b>	<b>7.56</b>	<b>9.54</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.65</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.65</b>	<b>12.14</b>
45/15 °C	T return primary	°C	25	25	25	25	25	24	24	24	23	22	22	22
	Ṁ primary	m³/h	<b>6.10</b>	<b>8.03</b>	<b>10.67</b>	<b>13.49</b>	<b>6.01</b>	<b>7.63</b>	<b>10.38</b>	<b>11.63</b>	<b>4.88</b>	<b>6.23</b>	<b>8.51</b>	<b>9.53</b>
	Q max.	kW	190	250	335	420	210	270	370	420	210	270	370	420
	Ṁ secondary	m³/h	<b>5.49</b>	<b>7.23</b>	<b>9.68</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.69</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.69</b>	<b>12.14</b>
45/20 °C	T return primary	°C	25	25	25	25	27	27	27	27	25	25	25	25
	Ṁ primary	m³/h	<b>2.73</b>	<b>3.53</b>	<b>4.66</b>	<b>6.42</b>	<b>5.46</b>	<b>6.97</b>	<b>9.57</b>	<b>10.65</b>	<b>4.37</b>	<b>5.59</b>	<b>7.68</b>	<b>8.57</b>
	Q max.	kW	85	110	145	200	175	225	310	350	175	225	310	350
	Ṁ secondary	m³/h	<b>2.95</b>	<b>3.82</b>	<b>5.03</b>	<b>6.94</b>	<b>6.07</b>	<b>7.80</b>	<b>10.75</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.75</b>	<b>12.14</b>

T return primary    °C    Return temperature primary  
 Ṁ primary            m³/h    Flow rate primary  
 Q max.                kW        Output  
 Ṁ secondary        m³/h    Flow rate secondary

The specified technical data relate to the full load of the module in each case.

Performance data

TransTherm® aqua FS (7-60 to 7-90)

Flow temperature heating water

Domestic water secondary	TransTherm® aqua FS	Flow temperature heating water							
		65 °C				70 °C			
		(60)	(70)	(80)	(90)	(60)	(70)	(80)	(90)
60/5 °C	T return primary °C	30	30	30	29	26	26	25	25
	<b>V primary</b> m³/h	<b>7.15</b>	<b>9.17</b>	<b>11.72</b>	<b>14.69</b>	<b>7.42</b>	<b>9.40</b>	<b>11.80</b>	<b>14.64</b>
	Q max. kW	290	370	480	610	375	480	549	760
	<b>V secondary</b> m³/h	<b>4.57</b>	<b>5.83</b>	<b>7.57</b>	<b>9.62</b>	<b>5.91</b>	<b>7.57</b>	<b>9.44</b>	<b>11.98</b>
60/10 °C	T return primary °C	30	30	30	30	28	28	28	27
	<b>V primary</b> m³/h	<b>5.45</b>	<b>6.94</b>	<b>9.41</b>	<b>12.88</b>	<b>7.23</b>	<b>9.29</b>	<b>12.23</b>	<b>15.42</b>
	Q max. kW	220	280	380	520	358	453	569	717
	<b>V secondary</b> m³/h	<b>3.82</b>	<b>4.86</b>	<b>6.59</b>	<b>9.02</b>	<b>6.16</b>	<b>7.80</b>	<b>9.79</b>	<b>12.14</b>
60/15 °C	T return primary °C	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>3.72</b>	<b>4.83</b>	<b>6.44</b>	<b>8.67</b>	<b>6.72</b>	<b>8.78</b>	<b>11.73</b>	<b>13.49</b>
	Q max. kW	150	195	260	350	310	405	540	630
	<b>V secondary</b> m³/h	<b>2.89</b>	<b>3.76</b>	<b>5.01</b>	<b>6.74</b>	<b>5.97</b>	<b>7.80</b>	<b>10.4</b>	<b>12.14</b>
60/20 °C	T return primary °C	30	30	30	30	30	30	30	30
	<b>V primary</b> m³/h	<b>2.11</b>	<b>2.85</b>	<b>3.72</b>	<b>4.95</b>	<b>4.34</b>	<b>5.64</b>	<b>7.37</b>	<b>9.97</b>
	Q max. kW	85	115	150	200	200	260	340	460
	<b>V secondary</b> m³/h	<b>1.84</b>	<b>2.49</b>	<b>3.25</b>	<b>4.34</b>	<b>4.34</b>	<b>5.64</b>	<b>7.37</b>	<b>9.97</b>
55/5 °C	T return primary °C	24	24	23	23	22	21	21	21
	<b>V primary</b> m³/h	<b>7.42</b>	<b>9.24</b>	<b>11.64</b>	<b>14.38</b>	<b>6.30</b>	<b>8.03</b>	<b>10.99</b>	<b>12.26</b>
	Q max. kW	350	440	560	700	350	450	620	700
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.63</b>	<b>9.71</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.75</b>	<b>12.14</b>
55/10 °C	T return primary °C	26	26	26	25	24	24	24	23
	<b>V primary</b> m³/h	<b>7.06</b>	<b>8.96</b>	<b>11.66</b>	<b>13.66</b>	<b>5.96</b>	<b>7.6</b>	<b>10.25</b>	<b>11.6</b>
	Q max. kW	315	405	530	630	315	405	550	630
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.80</b>	<b>10.21</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.6</b>	<b>12.14</b>
55/15 °C	T return primary °C	29	28	28	27	27	26	26	26
	<b>V primary</b> m³/h	<b>6.67</b>	<b>8.48</b>	<b>11.48</b>	<b>12.91</b>	<b>5.62</b>	<b>7.16</b>	<b>9.70</b>	<b>10.96</b>
	Q max. kW	280	360	490	560	280	360	490	560
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.80</b>	<b>10.62</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.62</b>	<b>12.14</b>
55/20 °C	T return primary °C	30	30	30	30	29	29	29	28
	<b>V primary</b> m³/h	<b>5.95</b>	<b>7.80</b>	<b>10.4</b>	<b>12.14</b>	<b>5.13</b>	<b>6.64</b>	<b>9.01</b>	<b>10.16</b>
	Q max. kW	240	315	420	490	245	315	430	490
	<b>V secondary</b> m³/h	<b>5.95</b>	<b>7.80</b>	<b>10.4</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.65</b>	<b>12.14</b>
50/5 °C	T return primary °C	20	20	19	19	18	18	17	17
	<b>V primary</b> m³/h	<b>6.06</b>	<b>7.72</b>	<b>10.43</b>	<b>11.77</b>	<b>5.30</b>	<b>6.74</b>	<b>9.05</b>	<b>10.27</b>
	Q max. kW	315	405	550	630	315	405	550	630
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.80</b>	<b>10.6</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.6</b>	<b>12.14</b>
50/10 °C	T return primary °C	22	22	22	21	21	20	20	19
	<b>V primary</b> m³/h	<b>5.69</b>	<b>7.28</b>	<b>9.81</b>	<b>11.08</b>	<b>4.90</b>	<b>6.24</b>	<b>8.46</b>	<b>9.57</b>
	Q max. kW	280	360	490	560	280	360	490	560
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.80</b>	<b>10.62</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.62</b>	<b>12.14</b>
50/15 °C	T return primary °C	25	25	24	24	23	23	22	22
	<b>V primary</b> m³/h	<b>5.30</b>	<b>6.74</b>	<b>9.14</b>	<b>10.29</b>	<b>4.52</b>	<b>5.76</b>	<b>7.82</b>	<b>8.83</b>
	Q max. kW	245	315	430	490	245	315	430	490
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.80</b>	<b>10.65</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.65</b>	<b>12.14</b>
50/20 °C	T return primary °C	27	26	27	26	26	26	25	25
	<b>V primary</b> m³/h	<b>4.84</b>	<b>6.00</b>	<b>8.38</b>	<b>9.43</b>	<b>4.12</b>	<b>5.26</b>	<b>7.16</b>	<b>8.07</b>
	Q max. kW	210	270	370	420	210	270	370	420
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.80</b>	<b>10.69</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.69</b>	<b>12.14</b>
45/5 °C	T return primary °C	16	16	16	15	15	14	14	13
	<b>V primary</b> m³/h	<b>4.99</b>	<b>6.34</b>	<b>8.58</b>	<b>9.69</b>	<b>4.39</b>	<b>5.59</b>	<b>7.59</b>	<b>8.58</b>
	Q max. kW	280	360	490	560	280	360	490	560
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.80</b>	<b>10.62</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.62</b>	<b>12.14</b>
45/10 °C	T return primary °C	19	18	18	18	17	17	17	16
	<b>V primary</b> m³/h	<b>4.57</b>	<b>5.85</b>	<b>7.92</b>	<b>8.94</b>	<b>4.02</b>	<b>5.13</b>	<b>6.98</b>	<b>7.90</b>
	Q max. kW	245	315	430	490	245	315	430	490
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.80</b>	<b>10.65</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.65</b>	<b>12.14</b>
45/15 °C	T return primary °C	21	21	21	20	20	20	20	19
	<b>V primary</b> m³/h	<b>4.15</b>	<b>5.30</b>	<b>7.24</b>	<b>8.15</b>	<b>3.64</b>	<b>4.66</b>	<b>6.37</b>	<b>7.18</b>
	Q max. kW	210	270	370	420	210	270	370	420
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.80</b>	<b>10.69</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.69</b>	<b>12.14</b>
45/20 °C	T return primary °C	24	24	24	24	23	23	23	23
	<b>V primary</b> m³/h	<b>3.71</b>	<b>4.75</b>	<b>6.51</b>	<b>7.31</b>	<b>3.24</b>	<b>4.15</b>	<b>5.71</b>	<b>6.42</b>
	Q max. kW	175	225	310	350	175	225	310	350
	<b>V secondary</b> m³/h	<b>6.07</b>	<b>7.80</b>	<b>10.75</b>	<b>12.14</b>	<b>6.07</b>	<b>7.80</b>	<b>10.75</b>	<b>12.14</b>

T return primary °C Return temperature primary  
**V primary** m³/h Flow rate primary  
 Q max. kW Output  
**V secondary** m³/h Flow rate secondary

The specified technical data relate to the full load of the module in each case.


Performance data

TransTherm® aqua FS

Residential units standard apartment according to DIN 4708	Peak heat demand standard apartment according to DIN 4708 with preparation 10 min	Sum flow rate domestic hot water calculation flow rate according to DIN 4708	Simultaneity factor according to DIN 4708	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak output (DHW)	Peak flow rate TransTherm® aqua FS (DHW)	Peak flow rate TransTherm® aqua FS (DHW)	Peak flow rate TransTherm® aqua FS (DHW)	DHW calorifier output TransTherm® aqua FS	TransTherm® aqua FS	Required heating water volume at 70/30 °C (40 K)	Required heating water buffer storage tank volume at 70/30 °C (40 K)	Buffer storage tank 2 EnerVal	Required recharging capacity	Required recharging capacity	Required recharging capacity															
																			N	Preparation	Σ VR at DHW 60 °C	g	Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C	Vs at DHW 60 °C	Q at HT 70/30 °C DHW 10/60 °C	Type	Time: 20 min 70/30 °C (40 K)	Time: 30 min 70/30 °C (40 K)	Time: 60 min 70/30 °C (40 K)
																			[Wh]	[l/s]		[l/s]	[l/min]	[m³/h]	[kW]	[l/s]	[l/min]	[m³/h]	[kW]		[m³]	[m³]	
1	5820	0.17	1.00	0.17	10.01	0.60	35	0.24	14.3	0.86	50	(7-10)	0.13	0.16	(200)	23	15	8															
2	11640	0.33	0.680	0.23	13.61	0.82	47	0.24	14.3	0.86	50	(7-10)	0.17	0.22	(200)	31	21	10															
3	17460	0.50	0.544	0.27	16.33	0.98	57	0.43	25.8	1.55	90	(7-16)	0.20	0.27	(200)	37	25	12															
4	23280	0.67	0.466	0.31	18.66	1.12	65	0.43	25.8	1.55	90	(7-16)	0.23	0.30	(200)	42	28	14															
5	29100	0.83	0.415	0.35	20.77	1.25	72	0.43	25.8	1.55	90	(7-16)	0.26	0.34	(200)	47	31	16															
6	34920	1.00	0.377	0.38	22.64	1.36	79	0.43	25.8	1.55	90	(7-16)	0.28	0.37	(200)	51	34	17															
7	40740	1.17	0.349	0.41	24.45	1.47	85	0.43	25.8	1.55	90	(7-16)	0.31	0.40	(300)	55	37	18															
8	46560	1.33	0.349	0.47	27.94	1.68	97	0.62	37.3	2.24	130	(7-20)	0.35	0.45	(300)	63	42	21															
9	52380	1.50	0.308	0.46	27.74	1.66	97	0.62	37.3	2.24	130	(7-20)	0.35	0.45	(300)	63	42	21															
10	58200	1.67	0.292	0.49	29.23	1.75	102	0.62	37.3	2.24	130	(7-20)	0.37	0.47	(300)	66	44	22															
11	64020	1.83	0.279	0.51	30.72	1.84	107	0.62	37.3	2.24	130	(7-20)	0.38	0.50	(300)	70	46	23															
12	69840	2.00	0.268	0.54	32.19	1.93	112	0.62	37.3	2.24	130	(7-20)	0.40	0.52	(500)	73	49	24															
13	75660	2.17	0.258	0.56	33.57	2.01	117	0.62	37.3	2.24	130	(7-20)	0.42	0.55	(500)	76	51	25															
14	81480	2.34	0.249	0.58	34.89	2.09	122	0.62	37.3	2.24	130	(7-20)	0.44	0.57	(500)	79	53	26															
15	87300	2.50	0.242	0.61	36.33	2.18	127	0.62	37.3	2.24	130	(7-20)	0.45	0.59	(500)	82	55	27															
16	93120	2.67	0.235	0.63	37.63	2.26	131	0.62	37.3	2.24	130	(7-20)	0.47	0.61	(500)	85	57	28															
17	98940	2.84	0.228	0.65	38.79	2.33	135	0.84	50.2	3.01	175	(7-30)	0.49	0.63	(500)	88	59	29															
18	104760	3.00	0.223	0.67	40.17	2.41	140	0.84	50.2	3.01	175	(7-30)	0.50	0.65	(500)	91	61	30															
19	110580	3.17	0.217	0.69	41.27	2.48	144	0.84	50.2	3.01	175	(7-30)	0.52	0.67	(500)	94	62	31															
20	116400	3.34	0.212	0.71	42.44	2.55	148	0.84	50.2	3.01	175	(7-30)	0.53	0.69	(500)	96	64	32															
21	122220	3.50	0.208	0.73	43.72	2.62	153	0.84	50.2	3.01	175	(7-30)	0.55	0.71	(500)	99	66	33															
22	128040	3.67	0.204	0.75	44.92	2.70	157	0.84	50.2	3.01	175	(7-30)	0.56	0.73	(500)	102	68	34															
23	133860	3.84	0.200	0.77	46.04	2.76	161	0.84	50.2	3.01	175	(7-30)	0.58	0.75	(500)	104	70	35															
24	139680	4.00	0.196	0.78	47.08	2.82	164	0.84	50.2	3.01	175	(7-30)	0.59	0.77	(500)	107	71	36															
25	145500	4.17	0.193	0.80	48.29	2.90	168	0.84	50.2	3.01	175	(7-30)	0.60	0.78	(500)	110	73	37															
26	151320	4.34	0.190	0.82	49.44	2.97	173	0.84	50.2	3.01	175	(7-30)	0.62	0.80	(500)	112	75	37															
27	157140	4.50	0.187	0.84	50.53	3.03	176	0.84	50.2	3.01	175	(7-30)	0.63	0.82	(500)	115	76	38															
28	162960	4.67	0.184	0.86	51.56	3.09	180	0.84	50.2	3.01	175	(7-30)	0.64	0.84	(500)	117	78	39															
29	168780	4.84	0.181	0.88	52.54	3.15	183	1.05	63.1	3.78	220	(7-40)	0.66	0.85	(800)	119	79	40															
30	174600	5.00	0.179	0.90	53.75	3.22	188	1.05	63.1	3.78	220	(7-40)	0.67	0.87	(800)	122	81	41															
31	180420	5.17	0.176	0.91	54.61	3.28	191	1.05	63.1	3.78	220	(7-40)	0.68	0.89	(800)	124	83	41															
32	186240	5.34	0.174	0.93	55.73	3.34	194	1.05	63.1	3.78	220	(7-40)	0.70	0.91	(800)	126	84	42															
33	192060	5.50	0.172	0.95	56.81	3.41	198	1.05	63.1	3.78	220	(7-40)	0.71	0.92	(800)	129	86	43															
34	197880	5.67	0.170	0.96	57.85	3.47	202	1.05	63.1	3.78	220	(7-40)	0.72	0.94	(800)	131	87	44															
35	203700	5.84	0.168	0.98	58.85	3.53	205	1.05	63.1	3.78	220	(7-40)	0.74	0.96	(800)	133	89	44															
36	209520	6.01	0.166	1.00	59.81	3.59	209	1.05	63.1	3.78	220	(7-40)	0.75	0.97	(800)	136	90	45															
37	215340	6.17	0.164	1.01	60.73	3.64	212	1.05	63.1	3.78	220	(7-40)	0.76	0.99	(800)	138	92	46															
38	221160	6.34	0.163	1.03	61.99	3.72	216	1.05	63.1	3.78	220	(7-40)	0.78	1.01	(800)	141	94	47															
39	226980	6.51	0.161	1.05	62.84	3.77	219	1.05	63.1	3.78	220	(7-40)	0.79	1.02	(800)	143	95	48															
40	232800	6.67	0.159	1.06	63.65	3.82	222	1.05	63.1	3.78	220	(7-40)	0.80	1.03	(800)	144	96	48															
41	238620	6.84	0.158	1.08	64.84	3.89	226	1.31	78.8	4.73	275	(7-50)	0.81	1.05	(1000)	147	98	49															
42	244440	7.01	0.156	1.09	65.58	3.93	229	1.31	78.8	4.73	275	(7-50)	0.82	1.07	(1000)	149	99	50															
43	250260	7.17	0.155	1.11	66.71	4.00	233	1.31	78.8	4.73	275	(7-50)	0.83	1.08	(1000)	151	101	50															
44	256080	7.34	0.154	1.13	67.82	4.07	237	1.31	78.8	4.73	275	(7-50)	0.85	1.10	(1000)	154	103	51															
45	261900	7.51	0.152	1.14	68.46	4.11	239	1.31	78.8	4.73	275	(7-50)	0.86	1.11	(1000)	155	104	52															
46	267720	7.67	0.151	1.16	69.52	4.17	243	1.31	78.8	4.73	275	(7-50)	0.87	1.13	(1000)	158	105	53															
47	273540	7.84	0.150	1.18	70.56	4.23	246	1.31	78.8	4.73	275	(7-50)	0.88	1.15	(1000)	160	107	53															
48	279360	8.01	0.149	1.19	71.58	4.29	250	1.31	78.8	4.73	275	(7-50)	0.89	1.16	(1000)	162	108	54															
49	285180	8.17	0.148	1.21	72.58	4.35	253	1.31	78.8	4.73	275	(7-50)	0.91	1.18	(1000)	165	110	55															
50	291000	8.34	0.146	1.22	73.06	4.38	255	1.31	78.8	4.73	275	(7-50)	0.91	1.19	(1000)	166	110	55															
51	296820	8.51	0.145	1.23	74.01	4.44	258	1.31	78.8	4.73	275	(7-50)	0.93	1.20	(1000)	168	112	56															
52	302640	8.67	0.144	1.25	74.94	4.50	261	1.31	78.8	4.73	275	(7-50)	0.94	1.22	(1000)	170	113	57															
53	308460	8.84	0.143	1.26	75.86	4.55	265	1.31	78.8	4.73	275	(7-50)	0.95	1.23	(1000)	172	115	57															
54	314280	9.01	0.142	1.28	76.75	4.60	268	1.31	78.8	4.73	275	(7-50)	0.96	1.25	(1000)	174	116	58															
55	320100	9.17	0.141	1.29	77.62	4.66	271	1.31	78.8	4.73	275	(7-50)	0.97	1.26	(1000)	176	117	59															


Residential units standard apartment according to DIN 4708	Peak heat demand standard apartment according to DIN 4708 with preparation 10 min	Sum flow rate domestic hot water calculation flow rate according to DIN 4708	Simultaneity factor according to DIN 4708	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak flow rate (DHW)	Peak output (DHW)	Peak flow rate TransTherm® aqua FS (DHW)	Peak flow rate TransTherm® aqua FS (DHW)	Peak flow rate TransTherm® aqua FS (DHW)	DHW calorifier output TransTherm® aqua FS	TransTherm® aqua FS	Required heating water volume at 70/30 °C (40 K)	Required heating water buffer storage tank volume at 70/30 °C (40 K)	Buffer storage tank 2 EnerVal	Required recharging capacity	Required recharging capacity	Required recharging capacity
N	Preparation	∑ VR at DHW 60 °C	g	Ṃs at DHW 60 °C	Ṃs at DHW 60 °C	Ṃs at DHW 60 °C		Ṃs at DHW 60 °C	Ṃs at DHW 60 °C	Ṃs at DHW 60 °C	Q at HT 70/30 °C DHW 10/60 °C	Type			Type	Time: 20 min 70/30 °C (40 K)	Time: 30 min 70/30 °C (40 K)	Time: 60 min 70/30 °C (40 K)
	[Wh]	[l/s]		[l/s]	[l/min]	[m³/h]	[kW]	[l/s]	[l/min]	[m³/h]	[kW]		[m³]	[m³]		[kW]	[kW]	[kW]
56	325920	9.34	0.140	1.31	78.47	4.71	274	1.31	78.8	4.73	275	(7-50)	0.98	1.28	(1000)	178	119	59
57	331740	9.51	0.140	1.33	79.87	4.79	279	1.31	78.8	4.73	275	(7-50)	1.00	1.30	(1000)	181	121	60
58	337560	9.67	0.139	1.34	80.69	4.84	282	1.71	102.6	6.16	358	(7-60)	1.01	1.31	(1000)	183	122	61
59	343380	9.84	0.138	1.36	81.49	4.89	284	1.71	102.6	6.16	358	(7-60)	1.02	1.32	(1000)	185	123	62
60	349200	10.01	0.137	1.37	82.27	4.94	287	1.71	102.6	6.16	358	(7-60)	1.03	1.34	(1000)	187	124	62
61	355020	10.18	0.136	1.38	83.03	4.98	290	1.71	102.6	6.16	358	(7-60)	1.04	1.35	(1000)	188	126	63
62	360840	10.34	0.135	1.40	83.77	5.03	292	1.71	102.6	6.16	358	(7-60)	1.05	1.36	(1000)	190	127	63
63	366660	10.51	0.135	1.42	85.12	5.11	297	1.71	102.6	6.16	358	(7-60)	1.06	1.38	(1000)	193	129	64
64	372480	10.68	0.134	1.43	85.83	5.15	299	1.71	102.6	6.16	358	(7-60)	1.07	1.40	(1000)	195	130	65
65	378300	10.84	0.133	1.44	86.52	5.19	302	1.71	102.6	6.16	358	(7-60)	1.08	1.41	(1000)	196	131	65
66	384120	11.01	0.132	1.45	87.19	5.23	304	1.71	102.6	6.16	358	(7-60)	1.09	1.42	(1000)	198	132	66
67	389940	11.18	0.132	1.48	88.52	5.31	309	1.71	102.6	6.16	358	(7-60)	1.11	1.44	(1000)	201	134	67
68	395760	11.34	0.131	1.49	89.16	5.35	311	1.71	102.6	6.16	358	(7-60)	1.11	1.45	(1000)	202	135	67
69	401580	11.51	0.130	1.50	89.78	5.39	313	1.71	102.6	6.16	358	(7-60)	1.12	1.46	(1000)	204	136	68
70	407400	11.68	0.130	1.52	91.08	5.46	318	1.71	102.6	6.16	358	(7-60)	1.14	1.48	(1000)	207	138	69
71	413220	11.84	0.129	1.53	91.67	5.50	320	1.71	102.6	6.16	358	(7-60)	1.15	1.49	(1000)	208	139	69
72	419040	12.01	0.128	1.54	92.24	5.53	322	1.71	102.6	6.16	358	(7-60)	1.15	1.50	(1500)	209	139	70
73	424860	12.18	0.128	1.56	93.52	5.61	326	1.71	102.6	6.16	358	(7-60)	1.17	1.52	(1500)	212	141	71
74	430680	12.34	0.127	1.57	94.06	5.64	328	1.71	102.6	6.16	358	(7-60)	1.18	1.53	(1500)	213	142	71
75	436500	12.51	0.127	1.59	95.33	5.72	333	1.71	102.6	6.16	358	(7-60)	1.19	1.55	(1500)	216	144	72
76	442320	12.68	0.126	1.60	95.84	5.75	334	1.71	102.6	6.16	358	(7-60)	1.20	1.56	(1500)	217	145	72
77	448140	12.84	0.126	1.62	97.10	5.83	339	1.71	102.6	6.16	358	(7-60)	1.21	1.58	(1500)	220	147	73
78	453960	13.01	0.125	1.63	97.58	5.86	340	1.71	102.6	6.16	358	(7-60)	1.22	1.59	(1500)	221	148	74
79	459780	13.18	0.124	1.63	98.04	5.88	342	1.71	102.6	6.16	358	(7-60)	1.23	1.59	(1500)	222	148	74
80	465600	13.34	0.124	1.65	99.29	5.96	346	1.71	102.6	6.16	358	(7-60)	1.24	1.61	(1500)	225	150	75
81	471420	13.51	0.123	1.66	99.72	5.98	348	1.71	102.6	6.16	358	(7-60)	1.25	1.62	(1500)	226	151	75
82	477240	13.68	0.123	1.68	100.95	6.06	352	1.71	102.6	6.16	358	(7-60)	1.26	1.64	(1500)	229	153	76
83	483060	13.85	0.122	1.69	101.35	6.08	354	1.71	102.6	6.16	358	(7-60)	1.27	1.65	(1500)	230	153	77
84	488880	14.01	0.122	1.71	102.57	6.15	358	1.71	102.6	6.16	358	(7-60)	1.28	1.67	(1500)	233	155	78
85	494700	14.18	0.121	1.72	102.94	6.18	359	1.71	102.6	6.16	358	(7-60)	1.29	1.67	(1500)	233	156	78
86	500520	14.35	0.121	1.74	104.15	6.25	363	2.16	129.9	7.79	453	(7-70)	1.30	1.69	(1500)	236	157	79
87	506340	14.51	0.120	1.74	104.49	6.27	365	2.16	129.9	7.79	453	(7-70)	1.31	1.70	(1500)	237	158	79
88	512160	14.68	0.120	1.76	105.69	6.34	369	2.16	129.9	7.79	453	(7-70)	1.32	1.72	(1500)	240	160	80
89	517980	14.85	0.120	1.78	106.89	6.41	373	2.16	129.9	7.79	453	(7-70)	1.34	1.74	(1500)	242	162	81
90	523800	15.01	0.119	1.79	107.19	6.43	374	2.16	129.9	7.79	453	(7-70)	1.34	1.74	(1500)	243	162	81
91	529620	15.18	0.119	1.81	108.38	6.50	378	2.16	129.9	7.79	453	(7-70)	1.36	1.76	(1500)	246	164	82
92	535440	15.35	0.118	1.81	108.65	6.52	379	2.16	129.9	7.79	453	(7-70)	1.36	1.77	(1500)	246	164	82
93	541260	15.51	0.118	1.83	109.83	6.59	383	2.16	129.9	7.79	453	(7-70)	1.37	1.79	(1500)	249	166	83
94	547080	15.68	0.117	1.83	110.07	6.60	384	2.16	129.9	7.79	453	(7-70)	1.38	1.79	(1500)	250	166	83
95	552900	15.85	0.117	1.85	111.25	6.67	388	2.16	129.9	7.79	453	(7-70)	1.39	1.81	(2000)	252	168	84
96	558720	16.01	0.117	1.87	112.42	6.74	392	2.16	129.9	7.79	453	(7-70)	1.41	1.83	(2000)	255	170	85
97	564540	16.18	0.116	1.88	112.62	6.76	393	2.16	129.9	7.79	453	(7-70)	1.41	1.83	(2000)	255	170	85
98	570360	16.35	0.116	1.90	113.78	6.83	397	2.16	129.9	7.79	453	(7-70)	1.42	1.85	(2000)	258	172	86
99	576180	16.51	0.116	1.92	114.94	6.90	401	2.16	129.9	7.79	453	(7-70)	1.44	1.87	(2000)	261	174	87
100	582000	16.68	0.115	1.92	115.10	6.91	402	2.16	129.9	7.79	453	(7-70)	1.44	1.87	(2000)	261	174	87

Residual overpressure / V domestic hot water circulation > draw-off standby

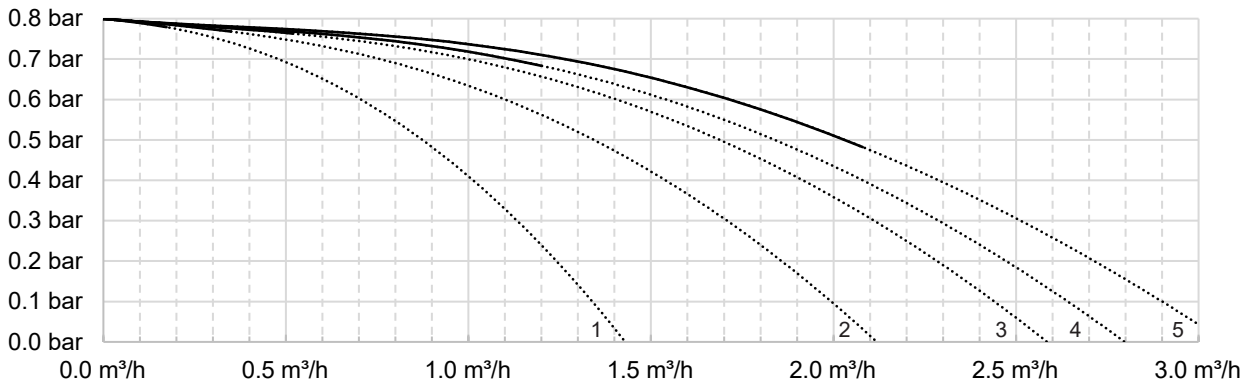


- 1 (7-10)
- 2 (7-16)
- 3 (7-20)
- 4 (7-30)
- 5 (7-40)

Residual overpressure / domestic hot water circulation > with draw-off Vs

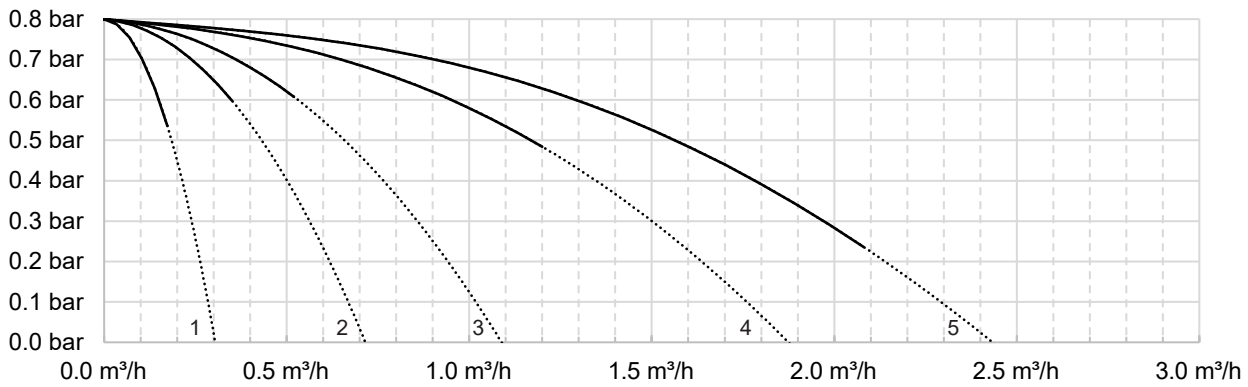


- 1 (7-10)
- 2 (7-16)
- 3 (7-20)
- 4 (7-30)
- 5 (7-40)

Residual overpressure / V domestic hot water circulation > draw-off standby

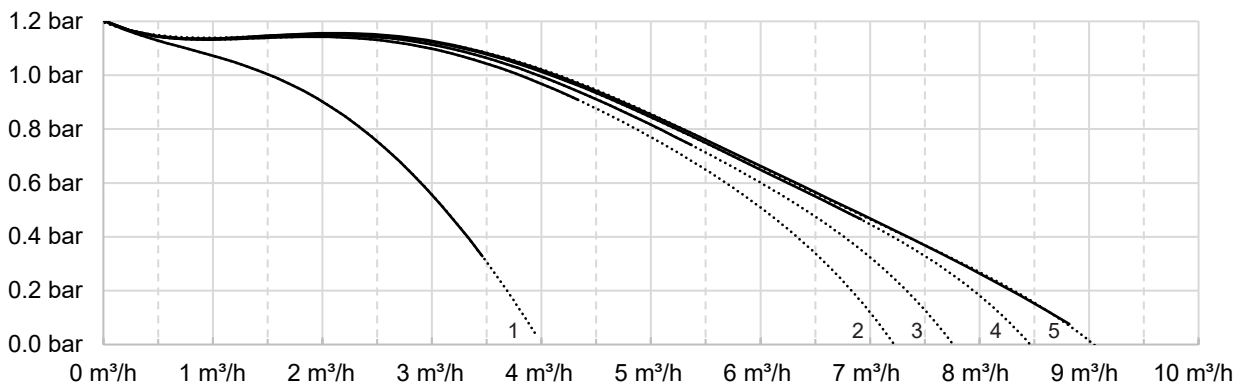

- 1 (7-50)
- 2 (7-60)
- 3 (7-70)
- 4 (7-80)
- 5 (7-90)


Residual overpressure / domestic hot water circulation > with draw-off Vs

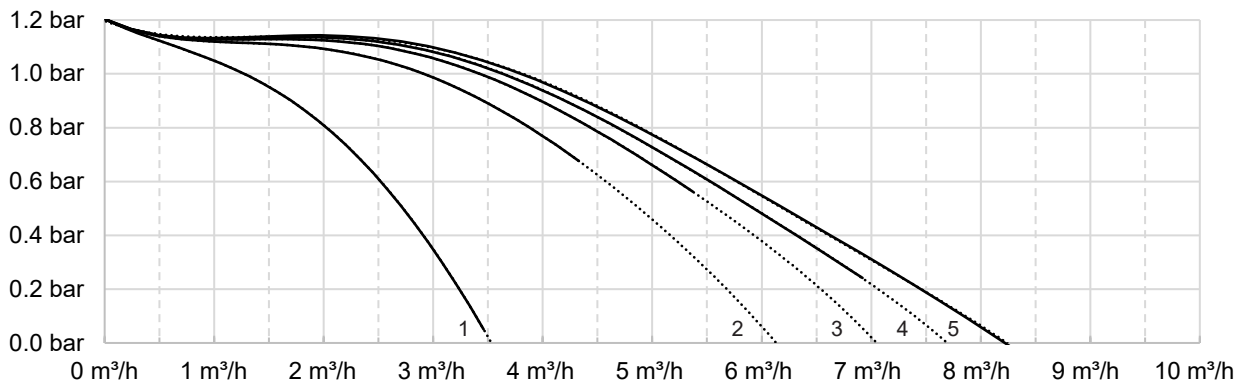

- 1 (7-50)
- 2 (7-60)
- 3 (7-70)
- 4 (7-80)
- 5 (7-90)


All values with open line balancing valve  
 Dotted lines = values above nominal performance range

$\Delta P / V$  max / cold water > domestic hot water

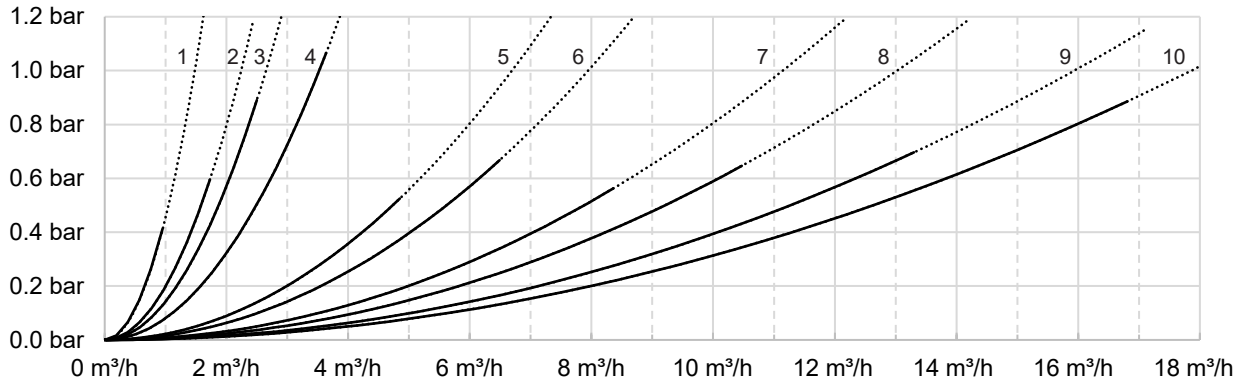


- 1 (7-10)
- 2 (7-16)
- 3 (7-20)
- 4 (7-30)
- 5 (7-40)
- 6 (7-50)
- 7 (7-60)
- 8 (7-70)
- 9 (7-80)
- 10 (7-90)

Residual overpressure / charging circuit flow HT

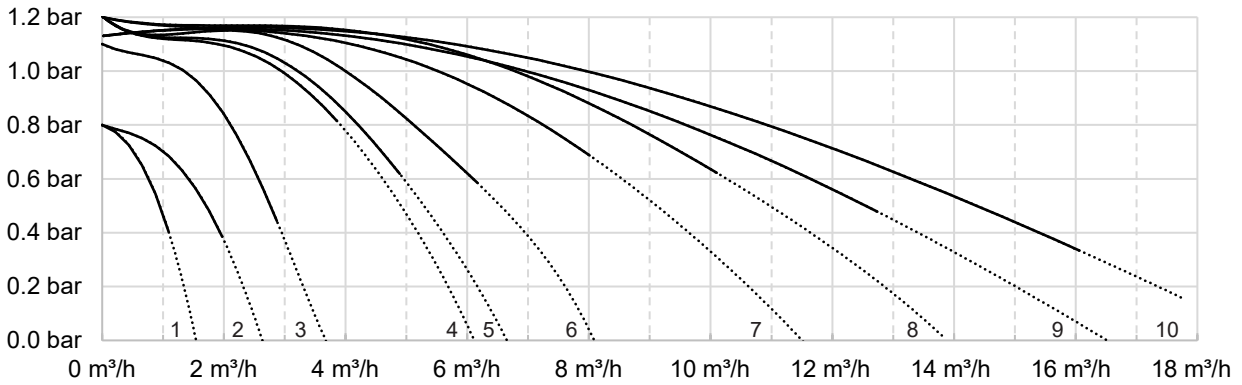

- 1 (7-10)
- 2 (7-16)
- 3 (7-20)
- 4 (7-30)
- 5 (7-40)
- 6 (7-50)
- 7 (7-60)
- 8 (7-70)
- 9 (7-80)
- 10 (7-90)

Residual overpressure / charging circuit flow LT


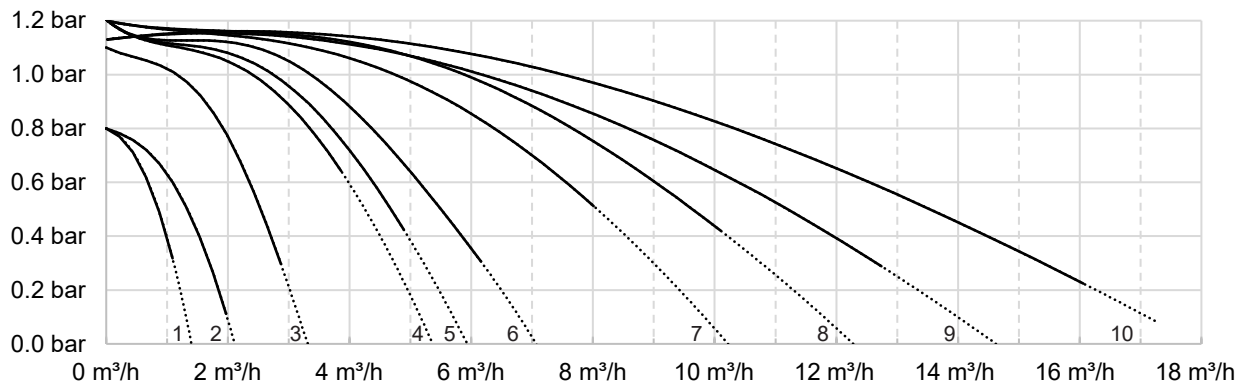


- 1 (7-10)
- 2 (7-16)
- 3 (7-20)
- 4 (7-30)
- 5 (7-40)
- 6 (7-50)
- 7 (7-60)
- 8 (7-70)
- 9 (7-80)
- 10 (7-90)

All values with open line balancing valve  
 Dotted lines = values above nominal performance range


Fresh water module TransTherm® aqua FS (7-10 to 7-50)  
(Dimensions in mm)

FS (7-10) approx. 1500  
FS (7-16), (7-20), (7-30) approx. 1550  
FS (7-40) approx. 1650  
FS (7-50) approx. 1750

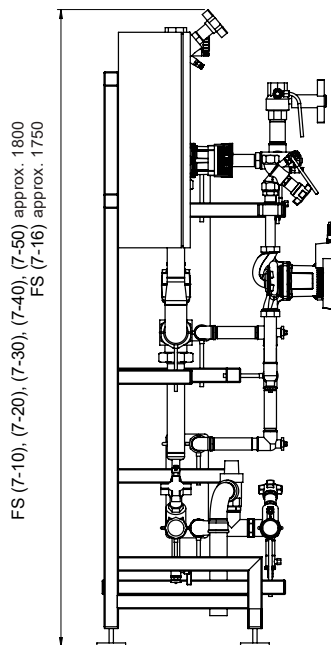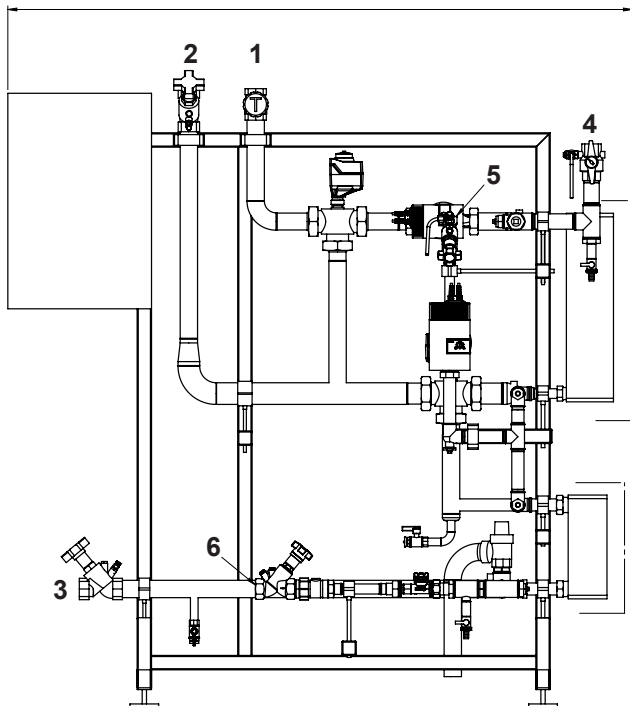

FS (7-10), (7-20), (7-30), (7-40), (7-50) approx. 1800  
FS (7-16) approx. 1750

FS (7-10), (7-16), (7-20), (7-30), (7-40) approx. 650  
FS (7-50) approx. 700


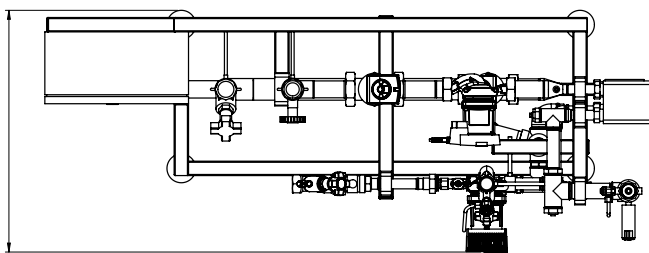


	(7-10)	(7-16)	(7-20) (7-30)	(7-40)	(7-50)
1 Charging circuit FL	DN 20, Rp 3/4"	DN 25, Rp 1"	DN 32, Rp 1 1/4"	DN 32, Rp 1 1/4"	DN 40, Rp 1 1/2"
2 Charging circuit HT RT	DN 20, Rp 3/4"	DN 25, Rp 1"	DN 32, Rp 1 1/4"	DN 32, Rp 1 1/4"	DN 40, Rp 1 1/2"
3 Charging circuit LT RT	DN 20, Rp 3/4"	DN 25, Rp 1"	DN 32, Rp 1 1/4"	DN 32, Rp 1 1/4"	DN 40, Rp 1 1/2"
4 Domestic hot water	DN 20, Rp 3/4"	DN 20, Rp 3/4"	DN 25, Rp 1"	DN 32, Rp 1 1/4"	DN 32, Rp 1 1/4"
5 Domestic hot water circulation	DN 20, Rp 3/4"	DN 20, Rp 3/4"	DN 20, Rp 3/4"	DN 25, Rp 1"	DN 25, Rp 1"
6 Cold water	DN 20, Rp 3/4"	DN 20, Rp 3/4"	DN 25, Rp 1"	DN 32, Rp 1 1/4"	DN 32, Rp 1 1/4"


Rp = Internal thread

**Fresh water module TransTherm® aqua FS (7-60 to 7-90)**  
(Dimensions in mm)

FS (7-60) approx. 2050  
 FS (7-70) approx. 2100  
 FS (7-80) approx. 2400  
 FS (7-90) approx. 2450

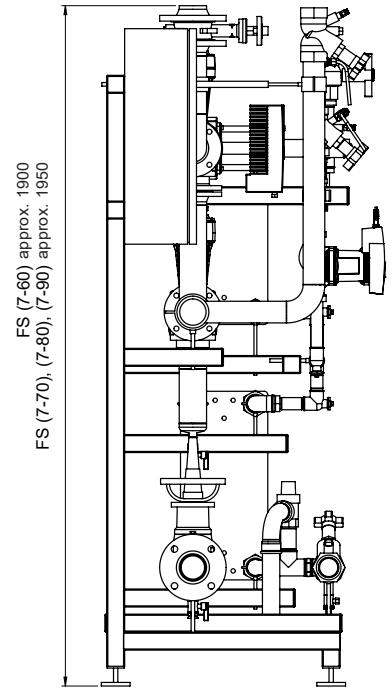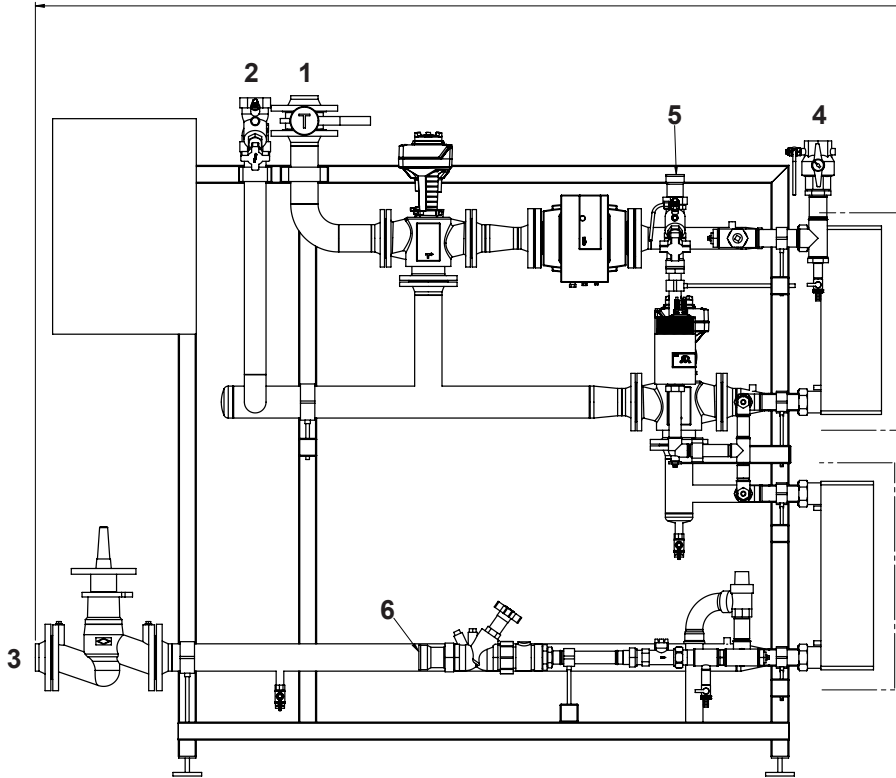


FS (7-60) approx. 1900  
 FS (7-70), (7-80), (7-90) approx. 1950

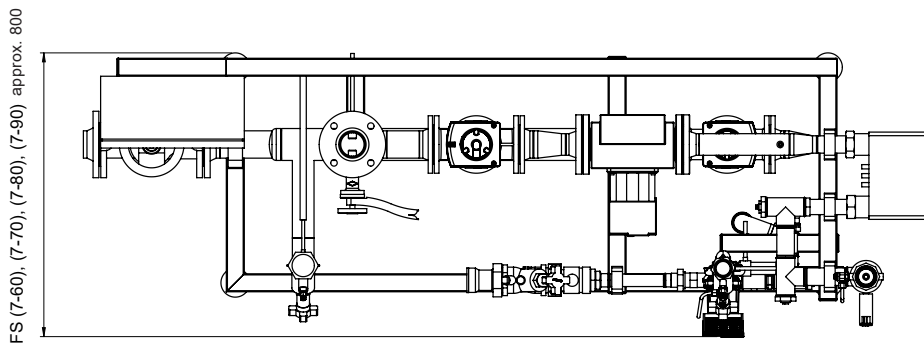

FS (7-60), (7-70), (7-80), (7-90) approx. 800

	(7-60) (7-70)	(7-80) (7-90)
1 Charging circuit FL	DN 50, Rp 2" (IT)	DN 65, Rp 2½" (IT)
2 Charging circuit HT RT	DN 50, Rp 2" (IT)	DN 65, Rp 2½" (IT)
3 Charging circuit LT RT	DN 50, Rp 2" (IT)	DN 65, Rp 2½" (IT)
4 Domestic hot water	DN 40, Rp 1½" (IT)	DN 50, Rp 2" (IT)
5 Domestic hot water circulation	DN 32, Rp 1¼" (IT)	DN 40, Rp 1½" (IT)
6 Cold water	DN 40, Rp 1½" (IT)	DN 50, Rp 2" (IT)

**Water heating**  
TransTherm® aqua FS

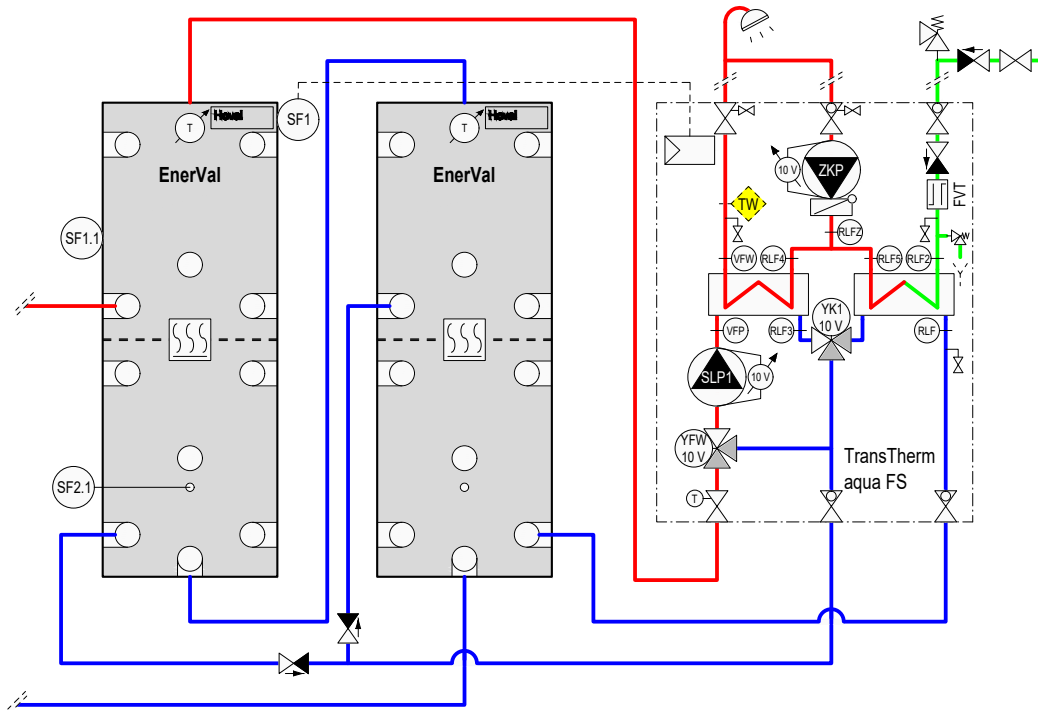

- TTE-FW Basic module district heating/fresh water
- TW Temperature monitor (if required)
- VFW Flow sensor DHW
- RLF4 Return sensor DHW
- RLF5 Return sensor DHW
- RLF2 Return sensor domestic cold water
- RLFZ Return sensor domestic hot water circulation
- SF1 Calorifier sensor
- SF1.1 Calorifier sensor (heat generator)
- SF2.1 Calorifier sensor (heat generator)
- RLFZ Circulation sensor
- FVT Flow rate sensor
- VFP Flow sensor primary
- RLF3 Return sensor HT primary
- RLF Return sensor LT primary
- SLP1 Calorifier charging pump
- YFW Three-way valve with drive (mixing valve)
- YK1 Three-way valve with drive (distributor valve)
- ZKP Circulating pump

*Option*  
BM TopTronic® E control module

**Notice**

A safety valve (6 bar) must be installed in the cold water line.  
The fresh water module is already protected with a safety valve (10 bar).

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval TransTherm<sup>®</sup> aqua

Fresh water module

TransTherm<sup>®</sup> aqua FT/FTC





**Table of contents**

■ Description	5
■ Part numbers	6
■ Technical data	8
■ Dimensions	10



### Fresh water module

#### TransTherm® aqua FT/FTC

Fresh water module for hygienic water heating in the continuous flow principle for single- and two-family homes with:

- high-output, soldered stainless steel plate heat exchanger (heat exchanger solder – FT: copper, FTC: stainless steel)
- integrated heating water charging pump
- flow switch for heating water charging pump
- cut-off armatures (optional)
- thermostatic hot water temperature control
- stainless steel piping for quick assembly
- wall attachment
- ready-to-connect
- casing made of sheet steel painted in red or white (optional)
- base plate

The quick-acting hot water temperature sensor accelerates the closing function of the regulating valve and protects the heat exchanger against overheating and scaling.

Output	65 kW (27 l/min)
	57 kW (23 l/min)




### Circulation module

for TransTherm® aqua FT (65), FTC (57)

- Pre-assembled, for installation on-site, incl. cable and plug
- Recirculation pump with integrated timer and circulation temperature control, as well as with pre-mounted safety valve (option)

Minimum requirements on water quality for fresh water modules see engineering hot water

Fresh water module

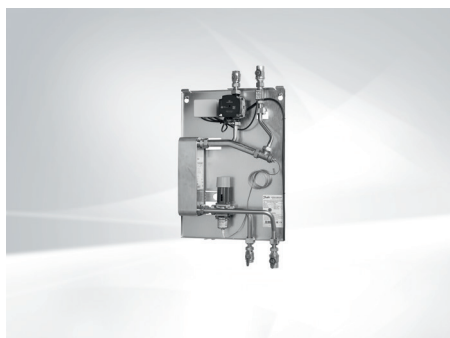

**TransTherm® aqua FT/FTC**

Fresh water module for hygienic water heating with thermostatic control of the hot water temperature by means of quick-acting water temperature controller

Fresh water module TransTherm® aqua	Output kW
FT (65)	65
FTC (57)	57

Part No.

6040 453  
6048 769

Accessories




**Ball valve set DVGW**  
for TransTherm® aqua FT/FTC

6040 456

**Casing**  
for TransTherm® aqua FT/FTC  
White colour

6044 175



**Casing**  
for TransTherm® aqua FT/FTC  
Red colour

6045 319



**Circulation heat exchanger lance R 1"**  
is screwed into the buffer storage tank and integrated into the circulation line.  
Material: Copper, tinned inside  
Transmission power approx. 1 kW at 60 °C  
Hot water temperature in the buffer storage tank without mixing through the storage tank temperature.  
Circulation connections R 1/2"  
Installation length 660 mm

2038 434

**Notice**

Circulating pump, safety valve, shut-off valves and non-return flap/valve are missing and must be installed on site.



**Circulation module**  
for TransTherm® aqua FT/FTC preassembled, for subsequent installation on the fresh water module comprising:  
Circulation pump with timer switch  
Integrated control of the temperature  
Non-return flap, ball valve Rp 3/4"  
cable and plug,  
safety valve 10 bar

6040 455

Services



**Services and associated scope of services**  
see separate catalogue "Hoval Services"


Commissioning by Hoval customer service is a prerequisite for warranty/guarantee activation.

Part No.


TransTherm® aqua FT/FTC

Type		FT (65)	FTC (57)
• Output	kW	65	57
• Connection dimension	Heating flow/return		G 3/4" (ext. thread)
	Cold/hot water		G 3/4" (ext. thread)
• Dimensions (W x H x D)	Without casing		440 x 655 x 140
	With casing		450 x 715 x 150
	With circulation		440/450 x 940 x 140/150
• Weight (incl. packaging)	kg	20	23
• Controller protection class		IP54	IP54
• Supply voltage	V		230
• Plate heat exchanger stainless steel		copper-soldered	soldered stainless steel
<b>Heat exchanger domestic water side</b>			
• Min. static cold water pressure	bar		0.5
• Max. operating pressure	bar		10
• Max. operating temperature	°C		70
<b>Design temperatures domestic water side</b>			
• Cold water	°C		10
• Hot water	°C		45
• Continuous output	l/min	27	23
<b>Heat exchanger heating side</b>			
• Max. operating pressure	bar		10
• Max. permissible operating temperature	°C		100
<b>Design temperatures heating side</b>			
• Heating flow	°C		55
• Heating return	°C		20
• Flow resistance (at V = 1.5 m³/h)	kPa		34


TransTherm® aqua FT (65)  
Hot water temperature 45 °C: Tapping capacity – Output – Pressure drops

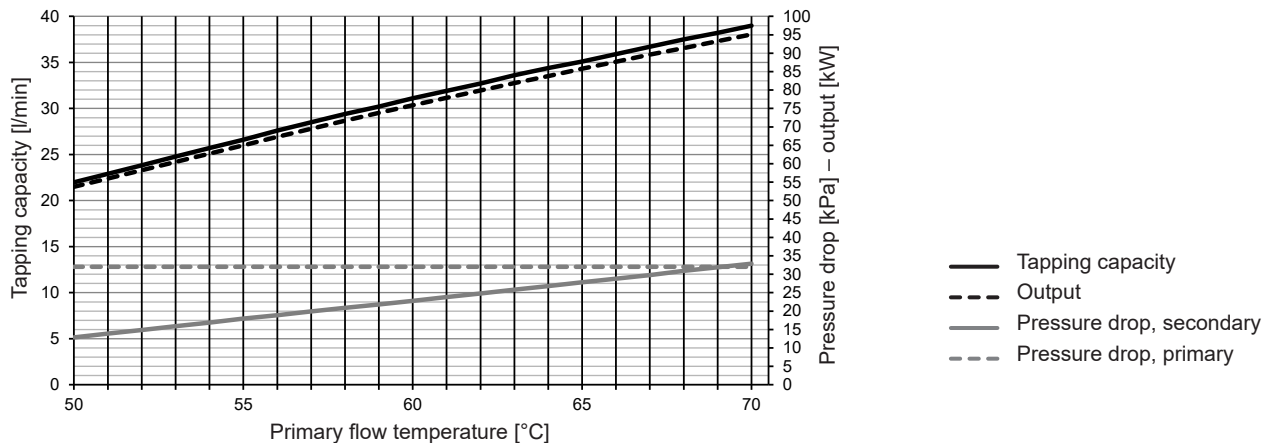

TransTherm® aqua FTC (57)  
Hot water temperature 45 °C: Tapping capacity – Output – Pressure drops

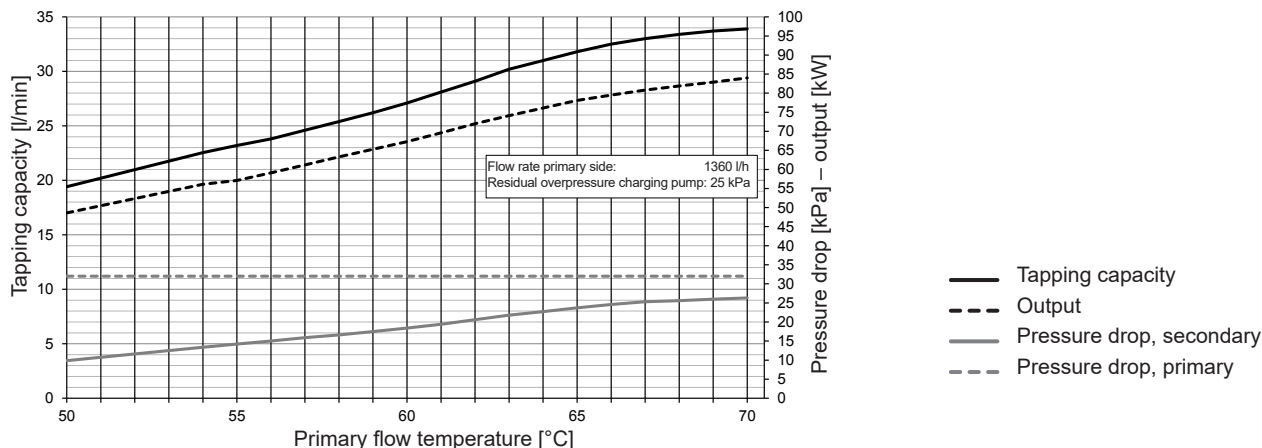

Construction TransTherm® aqua FT/FTC

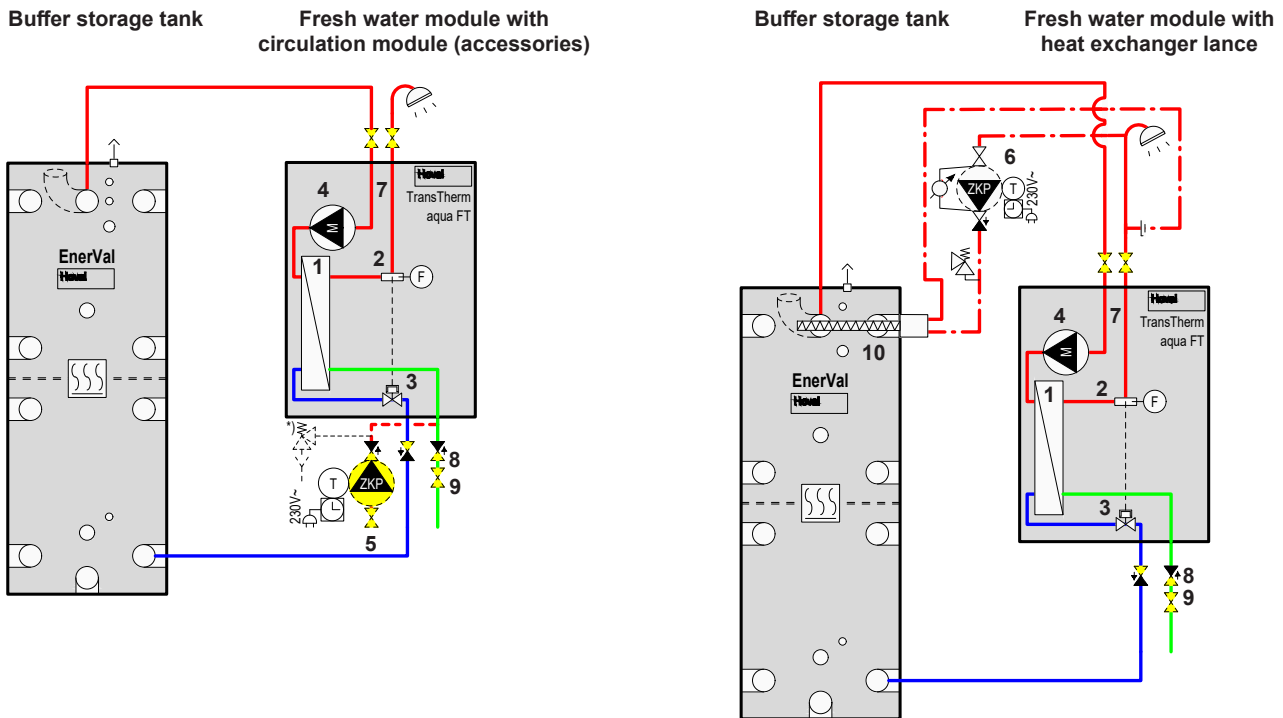

- 1 Stainless steel plate heat exchanger
- 2 Hot water sensor, quick-acting
- 3 Thermostatic control
- 4 Heating water charging pump
- 5 Circulation incl. safety valve (optional)
- 6 Circulation (optional)
- 7 Flow switch
- 8 Non-return valve (optional)
- 9 Cut-off ball valve – flat-sealing (optional)
- 10 Heat exchanger lance

\* Safety valve also necessary with recirculation pump on site

Installation of strainer on site

Functional description

Hoval TransTherm® aqua FT/FTC

The Hoval fresh water module TransTherm® aqua FT/FTC, with all piping pre-installed and ready-to-connect, consists of a soldered stainless-steel plate heat exchanger (heat exchanger solder – FT: copper, FTC: stainless steel), an integrated heating water charging pump, a thermostatic controller with tapping detection and hot water temperature control.

When a hot water tapping point is opened, the heating water charging pump is switched on via the flow detection device and the heating water transported from the buffer storage tank to the heat exchanger.


In the large-dimension plate heat exchanger, the hot water is heated in the counterflow principle, directly before removal and in a continuous flow process, from the cold water temperature to the desired DHW temperature.

The quick-acting water temperature controller ensures maintenance of the desired hot water temperature, providing a constant tapping temperature and optimum maintenance of stratification in the buffer storage tank.


An optional recirculation pump with thermostat ensures that the circulating water maintains the desired temperature.

**TransTherm® aqua FT/FTC**  
(Dimensions in mm)

**Casing**

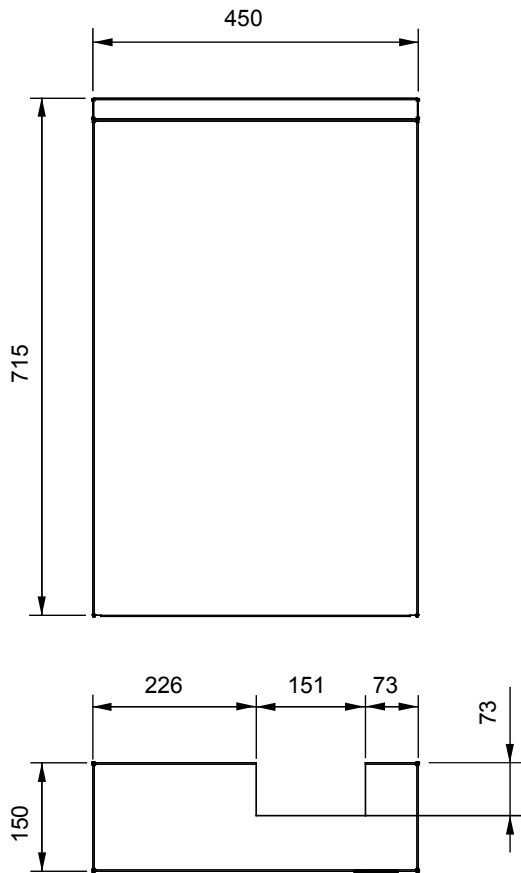

**Base plate**

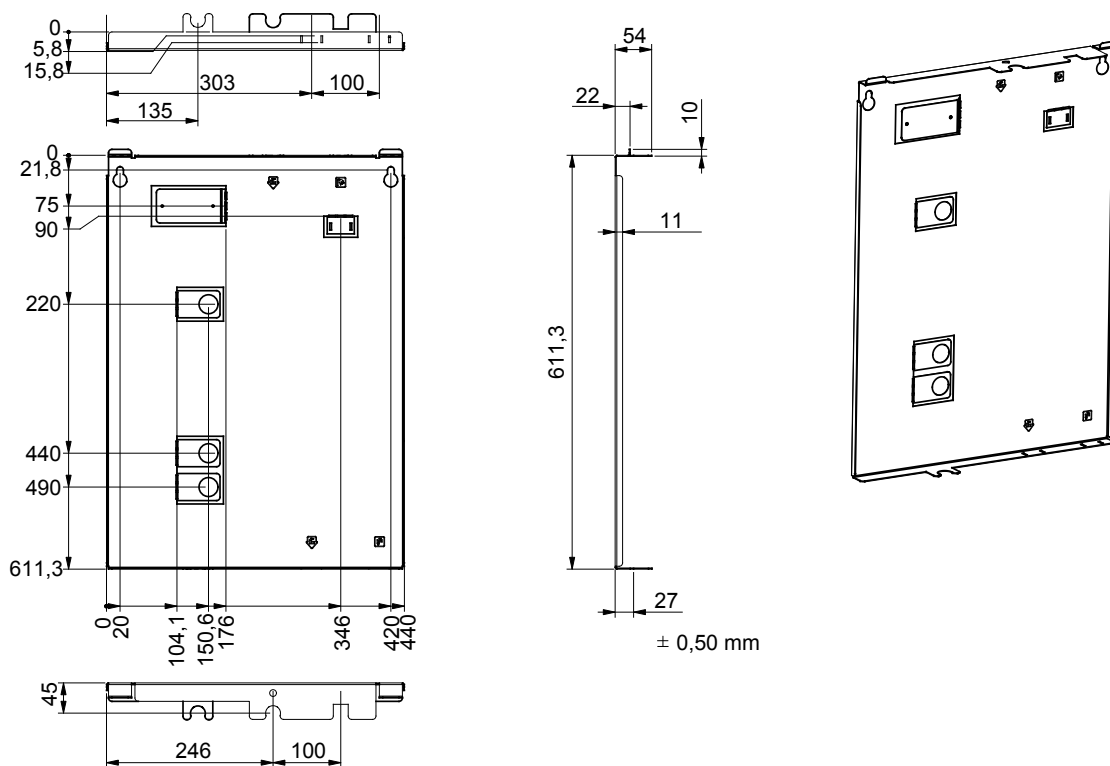

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein


Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval EnerVal (100-2000)

Buffer storage tank  
EnerVal (100-2000)

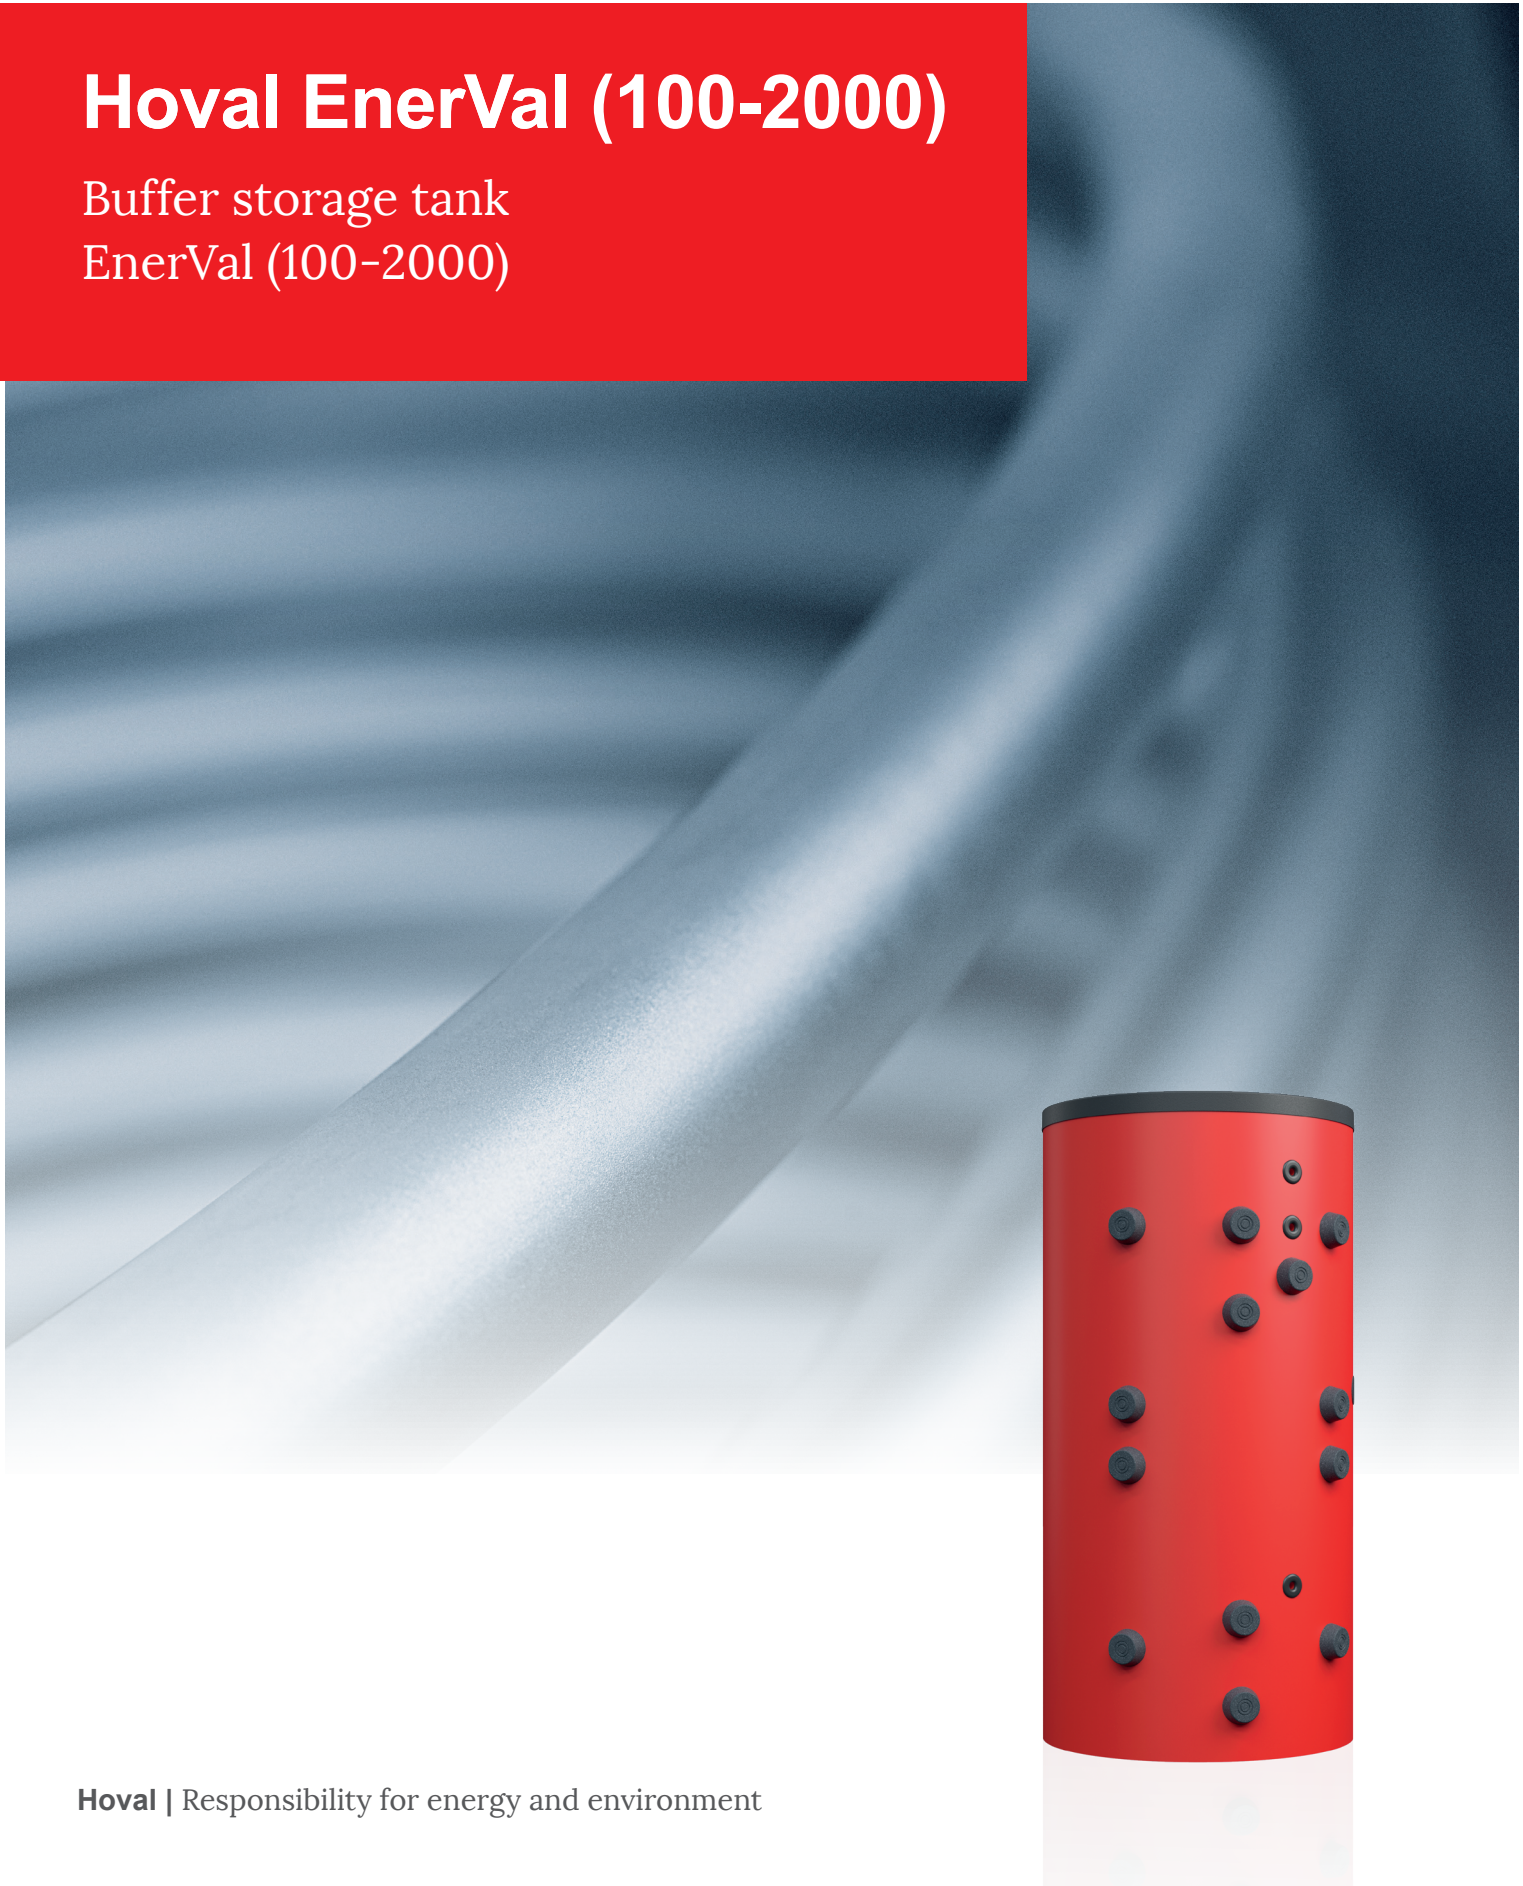



**Table of contents**

■ Description	5
■ Part numbers	6
■ Technical data	8
■ Dimensions	9



**Buffer storage tank  
EnerVal (100-300)**

- Steel buffer storage tank for the hydraulic integration of energy generators
- Thermal insulation made of polyurethane hard foam, foamed on the storage
- Removable foil jacket in red
- (100): 2 connection sleeves Rp 1 ½", 2 connection nozzles R 1"
- (200): 5 connection sleeves Rp 1 ½"
- (300): 8 connection sleeves Rp 1 ½"
- 1 sleeve Rp ½" with thermometer and immersion sleeve mounted
- (200,300): 2 sensor channels

*Delivery*

- Buffer storage tank with foil jacket completely installed and packed



**Buffer storage tank  
EnerVal (500)**

- Steel buffer storage tank for the hydraulic integration of energy generators
- Thermal insulation made of polyurethane hard foam, foamed on the calorifier
- Removable foil jacket in red
- 8 connection sleeves Rp 1 ½"
- 1 sleeve Rp 1 ½" for screw-in electrical heating inset
- 1 sleeve Rp ½" with thermometer and immersion sleeve mounted
- 2 sensor channels

*Delivery*

- Buffer storage tank with foil jacket completely installed and packed

Range EnerVal type		Content l	Operating pressure bar
(100)	<b>A</b>	117	3
(200)	<b>B</b>	222	3
(300)	<b>B</b>	283	3
(500)	<b>B</b>	473	3
(800)		785	3
(1000)		918	3
(1500)		1425	3
(2000)		2019	3

A\* → F


**Buffer storage tank  
EnerVal (800-2000)**

- Steel buffer storage tank for the hydraulic integration of energy generators
- Thermal insulation made of polyester fleece with foil jacket, colour red (removable)
- 10 connection sleeves G 2" (IT)
- 2 sleeves G 1 ½" (IT) for screw-in electric heating element
- 3 sleeves G ½" (IT) for sensor/thermometer
- Terminal strips for contact sensors
- 1 sleeve G 1" (IT) for circulation lance only with EnerVal (800,1000)
- 1 sleeve G 1" (IT) for ventilation
- Perforated separating plate in the central area for separation of the temperature zones
- Flow diversions permanently installed
- 13 insulated cover caps made of EPP hard foam, 2-piece (can be broken out)

*Delivery*

- Buffer storage tank with thermal insulation completely installed and packed
- Insulated cover caps already installed (can be removed and broken out)

Buffer storage tank

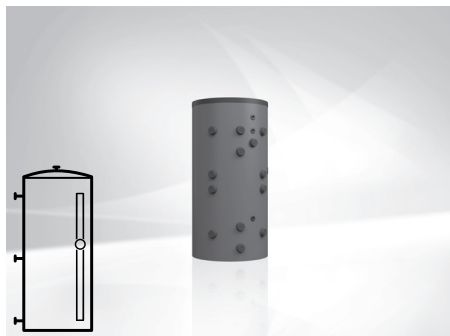

**EnerVal (100-2000)**

Steel container raw on the inside,  
EnerVal (100-500) completely installed,  
EnerVal (800-2000) thermal insulation completely installed

EnerVal type	Content l
(100)	117
(200)	222
(300)	283
(500)	473
(800)	785
(1000)	918
(1500)	1425
(2000)	2019

**Part No.**

7016 826  
7013 681  
7015 975  
7015 976  
7019 129  
7019 130  
7019 131  
7019 132

**Energy efficiency class**  
see "Description"

**Electric heating elements**  
see chapter "Electric heating elements"

Accessories



**Protective tube immersion sleeve set 200 1/2", 4 x**  
For installation of maximum 4 sensors  
Nickel-plated brass  
Installation length = 187 mm  
Outer Ø: 18 mm, inner Ø: 16 mm  
including 3 segment springs 90°,  
1 Omega clamping spring

6061 045



**Protective tube immersion sleeve SB280 1/2"**  
Nickel-plated brass  
Installation length = 280 mm  
Outer Ø: 9 mm, inner Ø: 7 mm

2018 837



**Thermometer kit**  
for EnerVal (800-6000)  
Thermometer 0 ... 120 °C with  
chromium plated edge and Hoval logo  
Stem length: 80 mm, stem Ø: 9 (13) mm,  
External Ø: 80 mm  
incl. immersion sleeve 1/2" nickel-plated  
brass, installation length: 200 mm,  
external Ø: 16 mm, internal Ø: 15 mm  
and clamping spring

6052 107



**Inject lance**  
for EnerVal (200-500)  
For horizontal installation in the  
buffer storage tank.  
For the decrease of the turbulence of  
the attached water.  
Screw-in depth: 450 mm  
Connection: Rp 1 1/2"

6051 645

Services



**Services and associated scope of services**  
see separate catalogue "Hoval Services"


Commissioning by Hoval customer service is a prerequisite for warranty/guarantee activation.

Part No.


**EnerVal (100-2000)**

Type		(100)	(200)	(300)	(500)	(800)	(1000)	(1500)	(2000)
• Volume	litres	117	222	283	473	785	918	1425	2019
• Max. operating/test pressure	bar	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
• Min. operating temperature	°C	5	5	5	5	20	20	20	20
• Max. operating temperature	°C	95	95	95	95	95	95	95	95
• Thermal insulation PU rigid foam, foam-lined	mm	50	50	75	75	-	-	-	-
• Thermal insulation polyester fleece	mm	-	-	-	-	150	150	150	150
• Thermal insulation $\lambda$	W/mK	0.027	0.027	0.027	0.027	0.04	0.04	0.04	0.04
• Fire protection class		B2	B2	B2	B2	B2	B2	B2	B2
• Heat loss at 65 °C	W	35	53	51	72	119	130	153	185
• Transport weight	kg	41	59	79	111	150	160	265	385
• U value	W/m <sup>2</sup> K	0.359	0.359	0.279	0.296	0.315	0.308	0.299	0.302
• Dimensions		see table of dimensions							

**Outflow velocity flow lance DN 40  
EnerVal (200-500)**

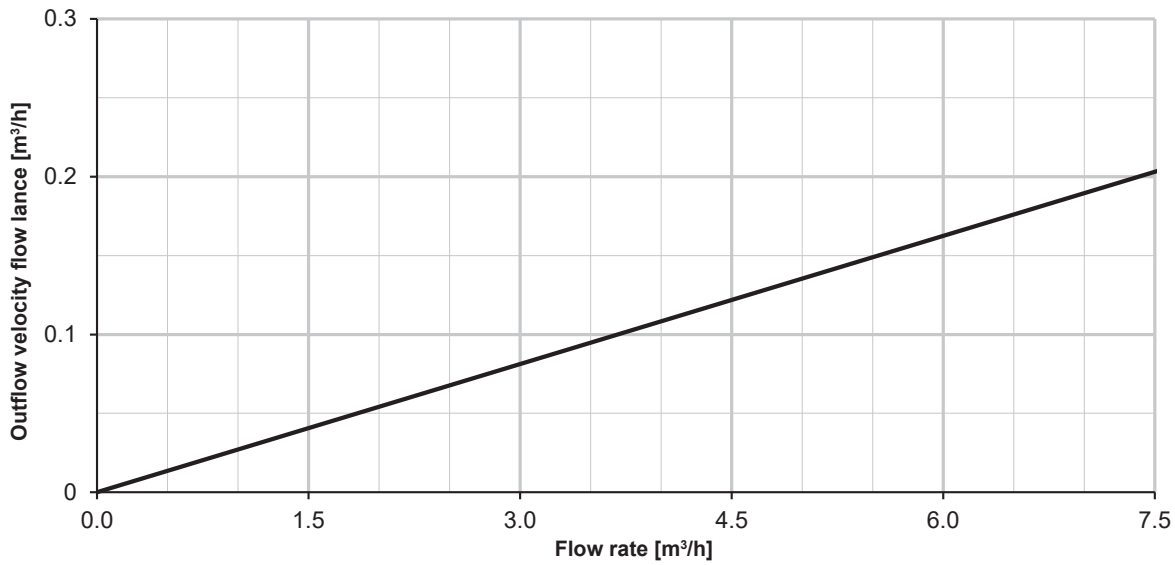


**Velocity in the connection nozzles and inflow velocity with flow deflection  
EnerVal (800-2000)**

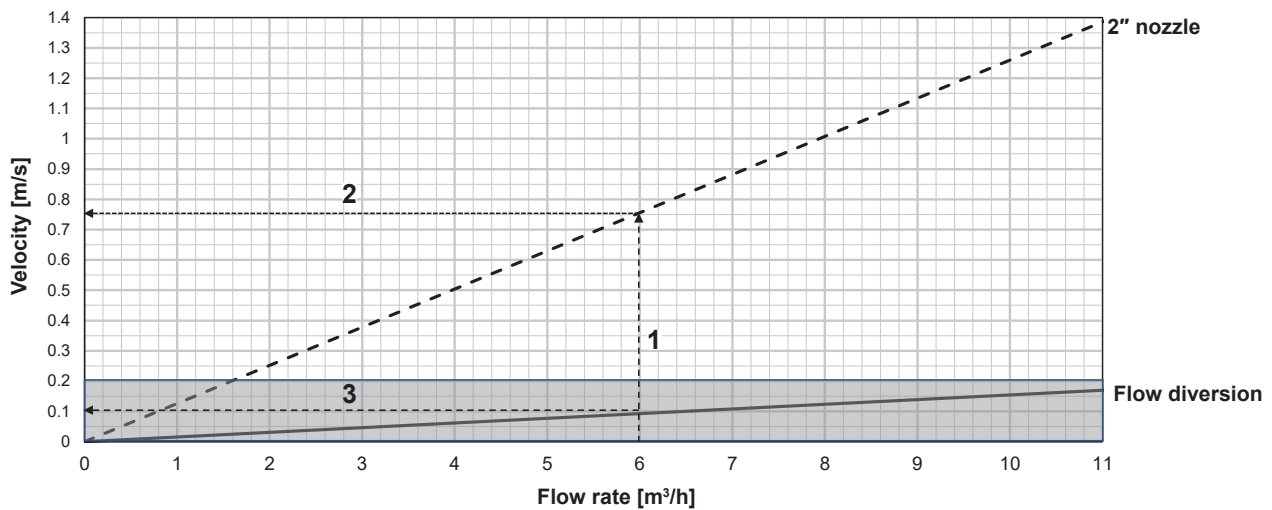





- 1 = flow rate
- 2 = velocity in the connection nozzles
- 3 = inflow velocity with flow deflection in the EnerVal

**Example of inlet velocity distribution by flow diversions EnerVal (800-2000)**

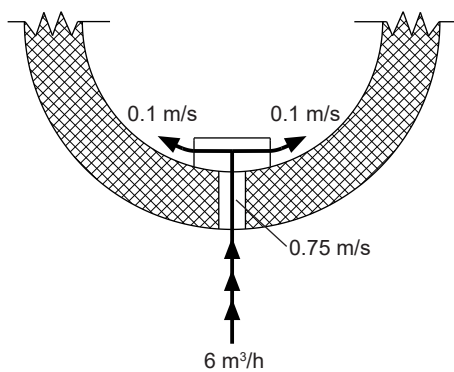

**EnerVal (100)**  
(Dimensions in mm)

**EnerVal (200-500)**

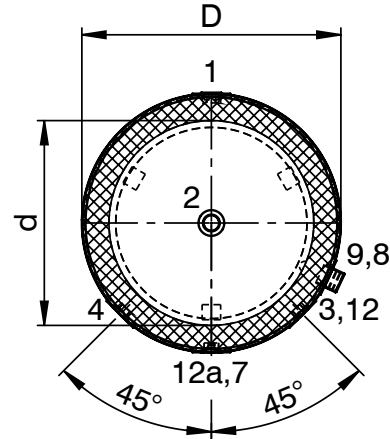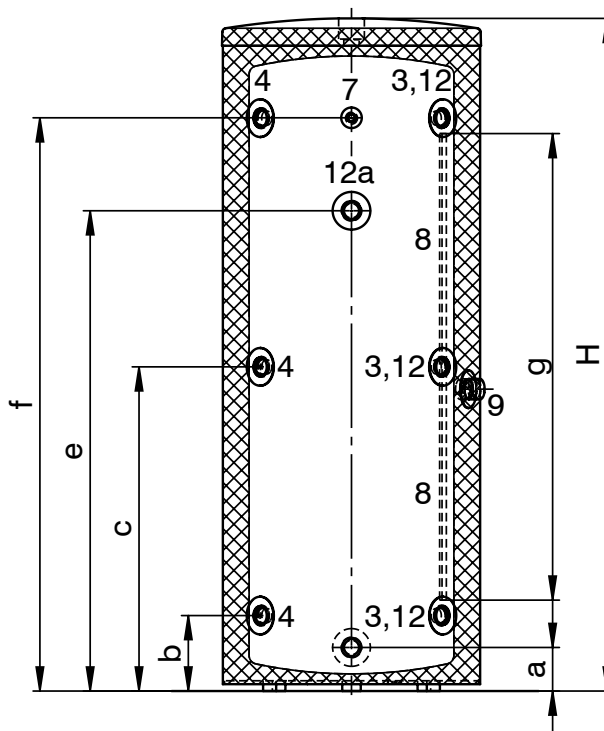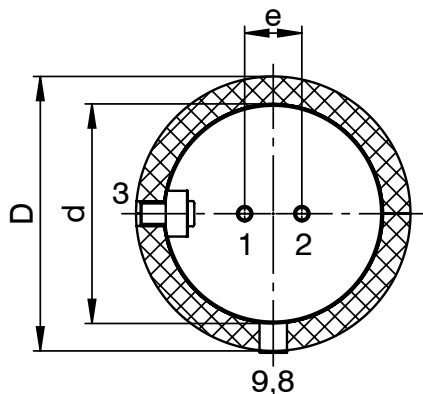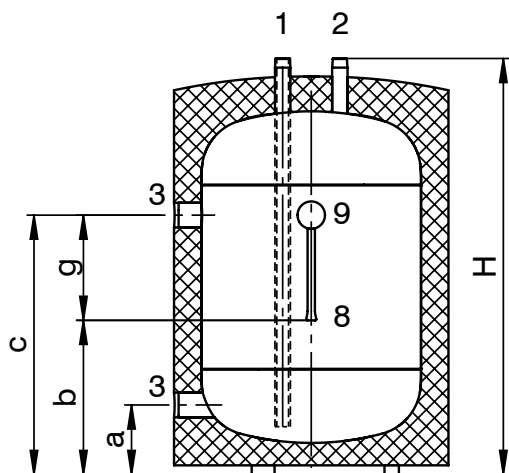




- |            |                |
|------------|----------------|
| Type (100) | Type (200-500) |
| R 1" (ET)  | G 1½" (IT)     |
| R 1" (ET)  | G 1½" (IT)     |
| G 1½" (IT) | G 1½" (IT)     |
|            | G 1½" (IT)     |
|            | G 1½" (IT)     |

- 1 Heating connection return discharge
  - 2 Heating connection flow discharge
  - 3 Heat generator connection flow/return
  - 4 Heat generator connection flow/return 3 x, only with EnerVal (300,500)
  - 7 Sleeve with mounted immersion sleeve and thermometer
  - 8 Sensor channel inner Ø 11 mm
  - 9 Removable cap (60 mm) for positioning the sensor in the sensor channel
  - 12 Connection for screw-in electric heating element  
(Positioning depends on the system, see hydraulic schematics of the heat generator)
  - 12a Additional connection for screw-in electric heating element, only for EnerVal (500)
- 1 + 2 For EnerVal (100), suitable for direct installation of an armature group LG/HA 25-2 and 32-2

EnerVal type	D	d	H	a	b	c	e	f	g	Tilting dimension
(100)	600	480	910	152	337	567	125	-	230	985
(200)	600	480	1440	152	300	720	-	1140	860	1560
(300)	650	480	1780	152	300	890	-	1479	1285	1895
(500)	750	597	1921	127	220	946	1400	1670	1360	2025

Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm

**EnerVal (800-2000)**  
(Dimensions in mm)

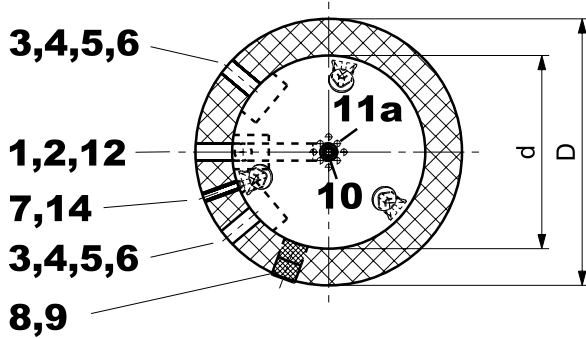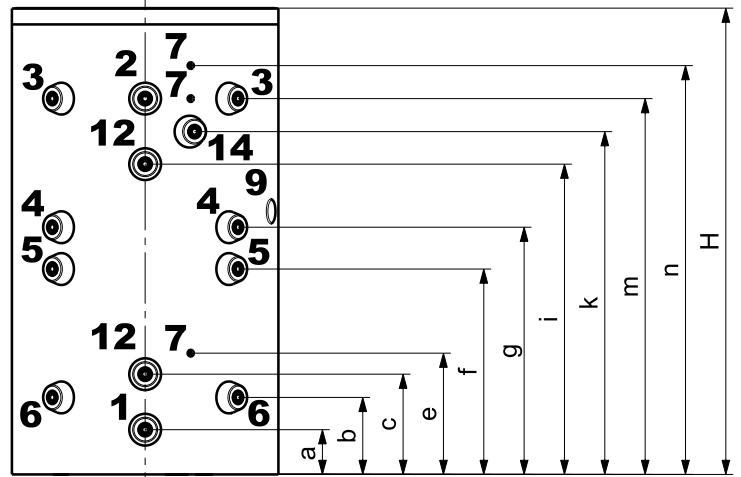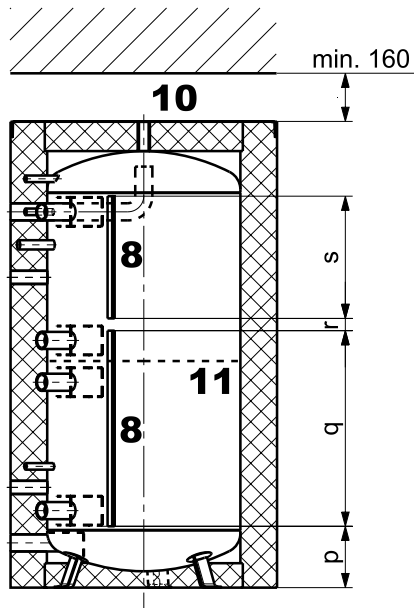

- |     |  |  |                |
|-----|--|--|----------------|
| 1   | Heating connection   | return discharge (inflow restrictor)     | Rp 2" (IT)     |
| 2   | Heating connection   | flow discharge (single-layer elbow pipe) | Rp 2" (IT)     |
| 3   | Heat generator connection  | flow top (inflow restrictor)             | Rp 2" (IT)     |
| 4   | Heat generator connection  | return top (inflow restrictor)           | Rp 2" (IT)     |
| 5   | Heat generator connection  | flow bottom (inflow restrictor)          | Rp 2" (IT)     |
| 6   | Heat generator connection  | return bottom (inflow restrictor)        | Rp 2" (IT)     |
| 7   | Sleeve for immersion sleeve, thermostat or thermometer                       |  | Rp 1/2" (IT)   |
| 8   | Sensor terminal strip  |  | 2 x            |
| 9   | Removable cap (100 mm) for positioning the sensor                            |  |                |
| 10  | Possible air vent  |  | Rp 1" (IT)     |
| 11  | Separating plate   |  |                |
| 11a | Holes in the separating plate  |  | 12 x           |
| 12  | Connection for electric heating element                                      |  | Rp 1 1/2" (IT) |
| 14  | Connection for circulation lance, <b>attention:</b> only for type (800,1000) |  | Rp 1" (IT)     |

Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm

EnerVal type	D	d	H	a	b	c	e	f	g	i	k	m	n	p	q	r	s	Tilting dimension
(800)	1090	790	1907	183	315	410	496	840	1011	1269	1402	1537	1672	251	800	50	500	1945
(1000)	1090	790	2197	183	369	468	569	970	1171	1472	1596	1759	1942	370	800	100	500	2230
(1500)	1300	1000	2135	220	368	451	549	941	1137	1431	-	1699	1839	339	800	100	500	2179
(2000)	1500	1200	2145	220	382	430	529	928	1127	1425	-	1672	1839	350	800	80	500	2210

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval EnerVal G

Buffer storage tank  
EnerVal G (800-6000)





**Table of contents**

■ Description	5
■ Part numbers	6
■ Technical data	7
■ Dimensions	9



**Buffer storage tank  
EnerVal G (800,1000)**

- Steel buffer storage tank for the hydraulic integration of energy generators
- Thermal insulation made of polyester fibre with foil jacket, colour red (removable)
- 8 connection flanges DN 65 (PN 6)
- 2 connection flanges DN 80 (PN 6)
- 2 flanges outside Ø 180 mm for flange-mounted electric heating element
- 3 sleeves G ½" (IT) for sensor/thermometer
- Terminal strips for contact sensors
- 1 sleeve G 1" (IT) for circulation lance
- 1 sleeve G 1" (IT) for ventilation
- Perforated separating plate in the central area for separation of the temperature zones
- Flow diversions permanently installed
- 12 insulated flange hoods
- 1 insulated cover cap made of EPP hard foam, 2-piece (can be broken out)

*Delivery*

- Buffer storage tank mounted and packed with thermal insulation (can be removed for installation)
- Insulated flange hoods and cover cap already mounted (removable)



EnerVal G (1000)

EnerVal G (4000)

**Range**

EnerVal G type	Content l	Operating pressure bar
(800)	783	6
(1000)	925	6
(1500)	1395	6
(2500)	2360	6
(4000)	3907	6
(6000)	5815	6

**Buffer storage tank  
EnerVal G (1500,2500)**

- Steel buffer storage tank for the hydraulic integration of energy generators
- Thermal insulation made of polyester fibre with foil jacket, colour red (removable)
- 8 connection flanges DN 80 (PN 6)
- 2 connection flanges DN 100 (PN 6)
- 2 flanges outside Ø 257 mm for flange-mounted electric heating element
- 3 sleeves G ½" (IT) for sensor/thermometer
- Terminal strips for contact sensors
- 1 sleeve G 1" (IT) for ventilation
- Perforated separating plate in the central area for separation of the temperature zones
- Flow diversions permanently installed
- 12 insulated flange hoods

*Delivery*

- Buffer storage tank (1500) mounted and packed with thermal insulation (can be removed for installation)
- Buffer storage tank (2500) separate thermal insulation
- Insulated flange hoods already mounted (removable)


**Buffer storage tank  
EnerVal G (4000,6000)**

- Steel buffer storage tank for the hydraulic integration of energy generators
- Without thermal insulation (on-site)
- 8 connection flanges DN 100 (PN 6)
- 2 connection flanges DN 125 (PN 6)
- 2 flanges outside Ø 257 mm for flange-mounted electric heating element
- 3 sleeves G ½" (IT) for sensor/thermometer
- Terminal strips for contact sensors
- 1 sleeve G 1" (IT) for ventilation
- Perforated separating plate in the central area for separation of the temperature zones
- Flow diversions permanently installed

*Delivery*

- Buffer storage tank raw packed
- Thermal insulation to be provided on site

Buffer storage tank

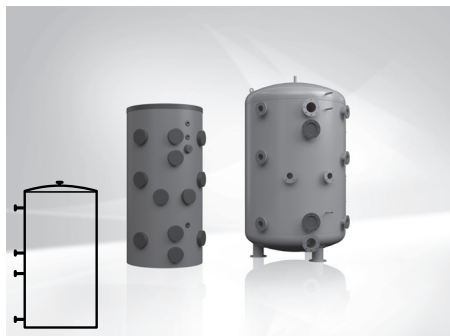

**EnerVal G (800-6000)**

Steel tank raw on the inside  
 EnerVal G (800-1500) fully insulated;  
 EnerVal G (2500), separate thermal insulation;  
 EnerVal G (4000,6000) packaged raw,  
 thermal insulation to be provided on site

EnerVal G type	Content l
(800)	783
(1000)	925
(1500)	1395
(2500)	2360
(4000)	3907
(6000)	5815

Part No.

7019 133  
 7019 134  
 7019 135  
 7019 136  
 6059 869  
 6059 870

**Electric heating elements**  
 see chapter "Electric heating elements"

Accessories



**Protective tube immersion**

sleeve set 200 1/2", 4 x  
 For installation of maximum 4 sensors  
 Nickel-plated brass  
 Installation length = 187 mm  
 Outer Ø: 18 mm, inner Ø: 16 mm  
 including 3 segment springs 90°,  
 1 Omega clamping spring

6061 045

**Protective tube immersion sleeve SB280 1/2"**

Nickel-plated brass  
 Installation length = 280 mm  
 Outer Ø: 9 mm, inner Ø: 7 mm

2018 837

**Thermometer kit**

for EnerVal (800-6000)  
 Thermometer 0 ... 120 °C with  
 chromium plated edge and Hoval logo  
 Stem length: 80 mm, stem Ø: 9 (13) mm,  
 External Ø: 80 mm  
 incl. immersion sleeve 1/2" nickel-plated  
 brass, installation length: 200 mm,  
 external Ø: 16 mm, internal Ø: 15 mm  
 and clamping spring

6052 107

Services




**Services and associated scope of services**  
 see separate catalogue "Hoval Services"

Commissioning by Hoval customer service  
 is a prerequisite for warranty/guarantee  
 activation.


**EnerVal G (800-6000)**

Type		(800)	(1000)	(1500)	(2500)	(4000)	(6000)
• Volume	l	783	925	1395	2360	3907	5815
• Max. operating/test pressure	bar	6/8	6/8	6/8	6/8	6/8	6/8
• Min. operating temperature	°C	20	20	20	20	20	20
• Max. operating temperature	°C	95	95	95	95	95	95
• Thermal insulation made from polyester fleece	mm	150	150	150	150	-	-
• Thermal insulation $\lambda$	W/mK	0.04	0.04	0.04	0.04	-	-
• Fire protection class		B2	B2	B2	B2	-	-
• Heat loss at 65 °C	W	114	129	152	203	-	-
• Transport weight	kg	215	235	345	775	1275	1695
• U value	W/m <sup>2</sup> K	0.302	0.305	0.295	0.295	-	-
• Dimensions		see dimensional drawing					


Velocity in the connection nozzles and inflow velocity with flow deflection in the EnerVal G (800-2500)

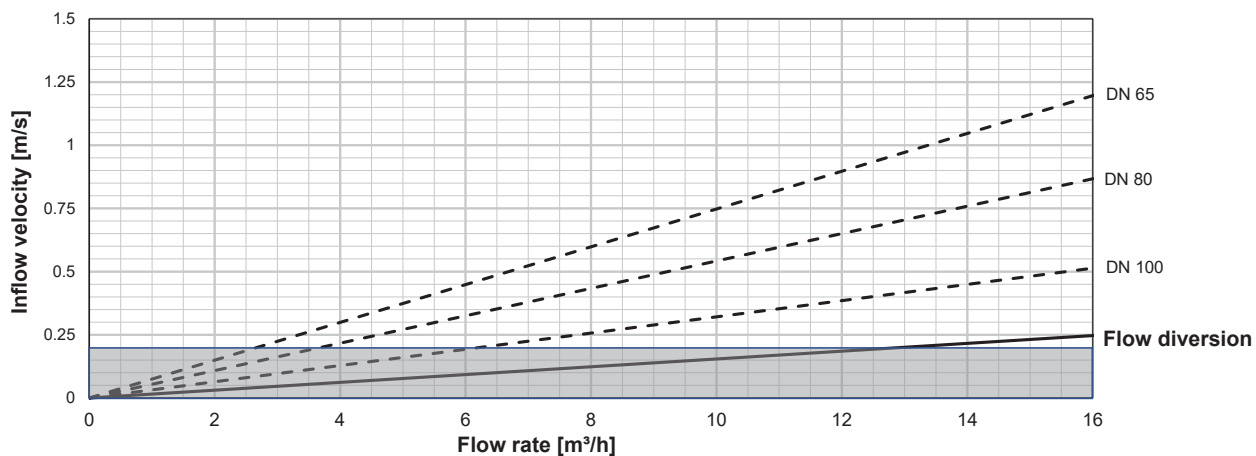



EnerVal G (4000,6000)

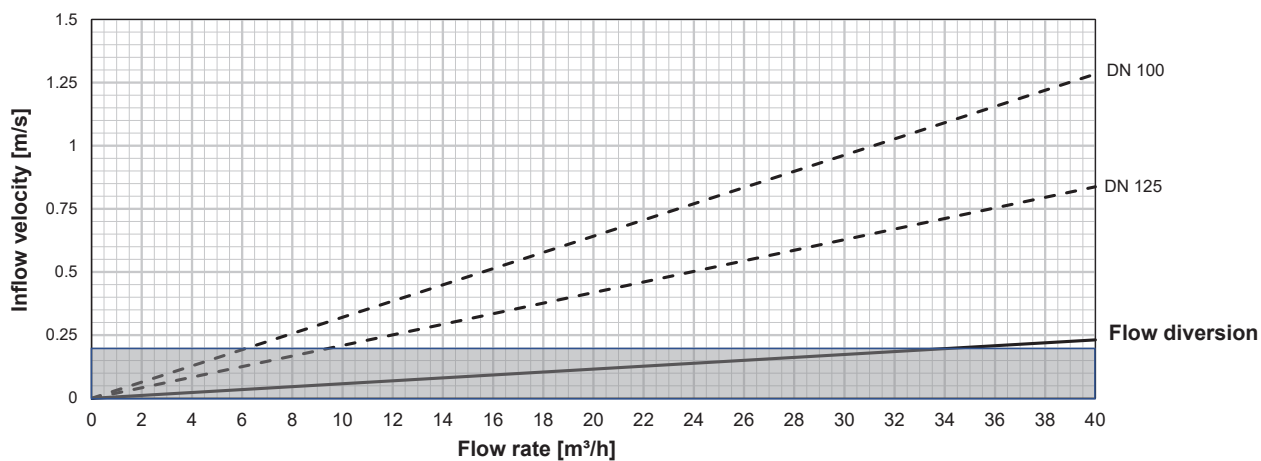

Example of inlet velocity distribution by flow diversions EnerVal G (800,1000)

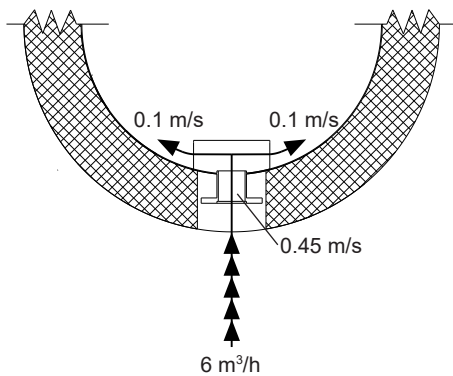

**EnerVal G (800-2500)**  
(Dimensions in mm)

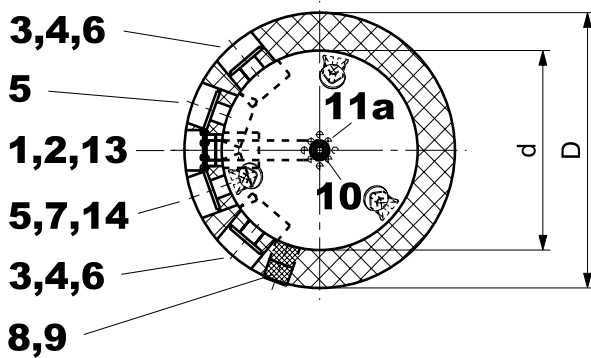
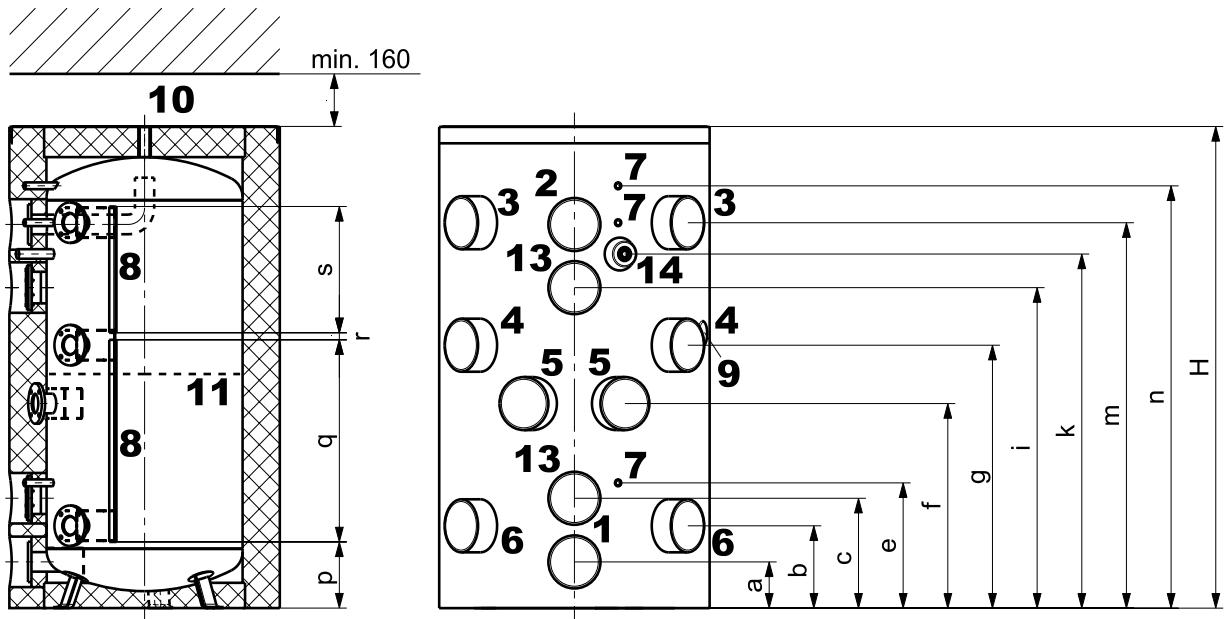


Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm

	Type (800,1000)	pitch circle Ø	Type (1500,2500)	pitch circle Ø
1 Heating connection return discharge (inflow restrictor)	DN 80, 4 x M16*, PN 6,	150 mm	DN 100, 4 x M16*, PN 6,	170 mm
2 Heating connection flow discharge (single-layer elbow pipe)	DN 80, 4 x M16*, PN 6,	150 mm	DN 100, 4 x M16*, PN 6,	170 mm
3 Heat generator connection flow top (inflow restrictor)	DN 65, 4 x M12*, PN 6,	130 mm	DN 80, 4 x M16*, PN 6,	150 mm
4 Heat generator connection return top (inflow restrictor)	DN 65, 4 x M12*, PN 6,	130 mm	DN 80, 4 x M16*, PN 6,	150 mm
5 Heat generator connection flow bottom (inflow restrictor)	DN 65, 4 x M12*, PN 6,	130 mm	DN 80, 4 x M16*, PN 6,	150 mm
6 Heat generator connection return bottom (inflow restrictor)	DN 65, 4 x M12*, PN 6,	130 mm	DN 80, 4 x M16*, PN 6,	150 mm
7 Sleeve for immersion sleeve, thermostat or thermometer	Rp ½" (IT)		Rp ½" (IT)	
8 2 sensor terminal strips				
9 Removable cap (100 mm) for positioning the sensor				
10 Possible air vent	Rp 1" (IT)		Rp 1" (IT)	
11 Separating plate				
11a Holes in the separating plate	12 x		12 x	
13 Hand-hole flange (flange-mounted electric heating element) (800,1000) outside Ø 180 mm, pitch circle Ø 150 mm, 8 x M10 (1500,2500) outside Ø 257 mm, pitch circle Ø 225 mm, 10 x M10				
14 Connection for circulation lance, <b>attention:</b> only for type (800,1000)	Rp 1" (IT)		-	
* The screw holes have threads				
** Dimension for transport into building 823 mm (due to flanges position 3,4,6)				

EnerVal G type	D	d	H	a	b	c	e	f	g	i	k	m	n	p	q	r	s	Tilting measure
(800)	1090	790**	1907	183	326	435	496	810	1041	1269	1402	1526	1672	262	800	28	500	1945
(1000)	1090	790**	2197	183	369	468	569	955	1186	1472	1596	1759	1942	370	800	100	500	2230
(1500)	1300	1000	2135	180	358	489	529	894	1144	1360	-	1679	1819	319	800	100	500	2154
(2500)	1500	1200	2500	250	435	560	645	1100	1352	1670	-	2003	2211	400	800	100	800	2567

**EnerVal G (4000,6000)**  
(Dimensions in mm)

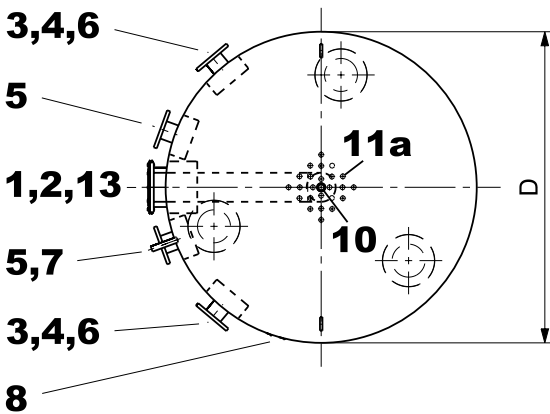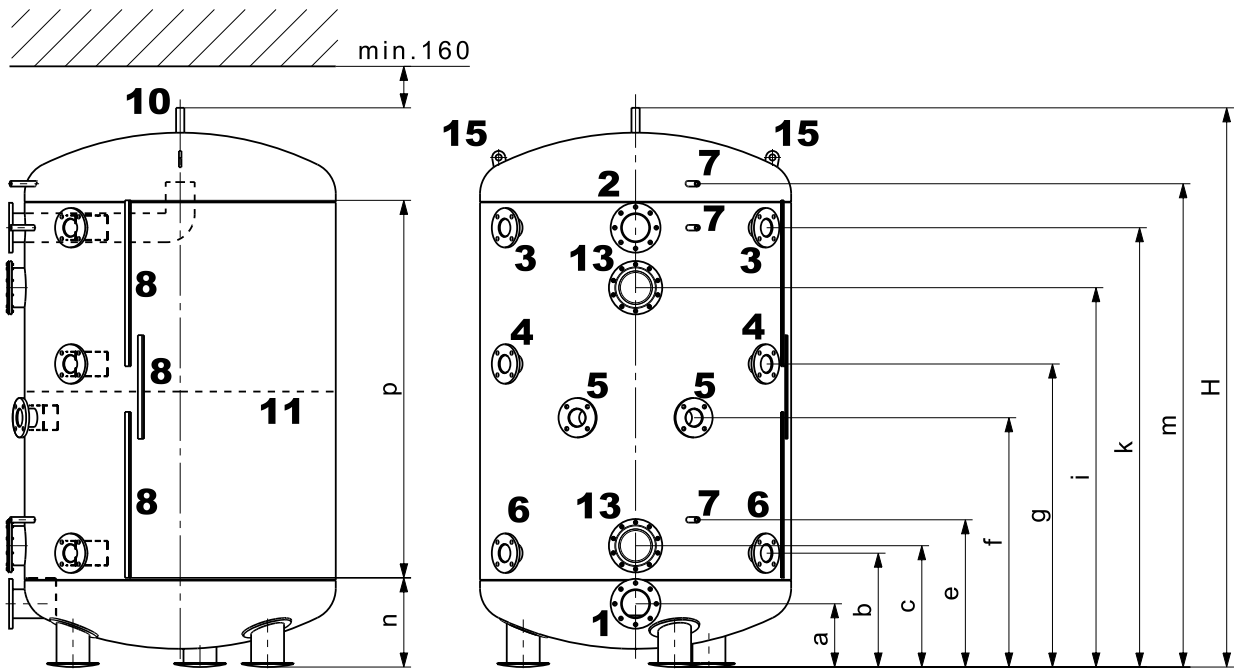

Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm

	Type (4000,6000)	pitch circle Ø
1	Heating connection return discharge (inflow restrictor)	DN 125, 8 x M16*, PN 6, 200 mm
2	Heating connection flow discharge (single-layer elbow pipe)	DN 125, 8 x M16*, PN 6, 200 mm
3	Heat generator connection flow top (inflow restrictor)	DN 100, 4 x M16*, PN 6, 170 mm
4	Heat generator connection return top (inflow restrictor)	DN 100, 4 x M16*, PN 6, 170 mm
5	Heat generator connection flow bottom (inflow restrictor)	DN 100, 4 x M16*, PN 6, 170 mm
6	Heat generator connection return bottom (inflow restrictor)	DN 100, 4 x M16*, PN 6, 170 mm
7	Sleeve for immersion sleeve, thermostat or thermometer	Rp 1/2" (IT)
8	3 sensor terminal strips	
10	Possible air vent	Rp 1" (IT)
11	Separating plate	
11a	Holes in the separating plate	24 x
13	Hand-hole flange (flange-mounted electric heating element) Outside Ø 257 mm, pitch circle Ø 225 mm, 10 x M10	
15	Transport strap	

\* The screw holes have threads

EnerVal G type	D	H	a	b	c	e	f	g	i	k	m	n	p	Tilting measure
(4000)	1500	2696	305	549	585	710	1202	1461	1829	2118	2330	430	1820	2773
(6000)	1500	3802	302	625	805	985	1704	2064	2603	3142	3442	550	2700	3858

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval EnerVal G cool

Buffer storage tank – cold storage tank  
EnerVal G cool (800-6000)





**Table of contents**

■ Description	5
■ Part numbers	6
■ Technical data	7
■ Dimensions	9



**Buffer storage tank – cold storage tank  
 EnerVal G cool (800,1000)**

- Steel buffer storage tank for the hydraulic integration of energy generators, coating with water-based paint
- Cold insulation made of synthetic rubber (19 mm), glued on diffusion-proof, with outer plastic jacket (red)
- 8 connection flanges DN 65 (PN 6)
- 2 connection flanges DN 80 (PN 6)
- 1 sleeve G 1½" (IT) for electric heating element
- 5 sleeves G ½" (IT) for sensor/thermometer
- 1 sleeve G 1" (IT) for circulation lance
- 1 sleeve G 1" (IT) for ventilation
- Perforated separating plate in the central area for separation of the temperature zones
- Flow diversions permanently installed

*Delivery*

- Cold storage tank mounted with cold insulation (glued on diffusion-proof)



**Buffer storage tank – cold storage tank  
 EnerVal G cool (1500,2500)**

- Steel buffer storage tank for the hydraulic integration of energy generators, coating with water-based paint
- Cold insulation made of synthetic rubber (19 mm), glued on diffusion-proof, with outer plastic jacket (red)
- 8 connection flanges DN 80 (PN 6)
- 2 connection flanges DN 100 (PN 6)
- 1 sleeve G 1½" (IT) for electric heating element
- 5 sleeves G ½" (IT) for sensor/thermometer
- 1 sleeve G 1" (IT) for ventilation
- Perforated separating plate in the central area for separation of the temperature zones
- Flow diversions permanently installed

*Delivery*

- Cold storage tank mounted with cold insulation (glued on diffusion-proof)

**Buffer storage tank – cold storage tank  
 EnerVal G cool (4000,6000)**


- Steel buffer storage tank for the hydraulic integration of energy generators, coating with water-based paint
- Cold insulation made of synthetic rubber (19 mm), glued on diffusion-proof, with outer plastic jacket (red)
- 8 connection flanges DN 100 (PN 6)
- 2 connection flanges DN 125 (PN 6)
- 1 sleeve G 1½" (IT) for electric heating element
- 5 sleeves G ½" (IT) for sensor/thermometer
- 1 sleeve G 1" (IT) for ventilation
- Perforated separating plate in the central area for separation of the temperature zones
- Flow diversions permanently installed

*Delivery*

- Cold storage tank mounted with cold insulation (glued on diffusion-proof)

Range		
EnerVal G cool type	Content l	Operating pressure bar
(800)	793	6
(1000)	889	6
(1500)	1440	6
(2500)	2518	6
(4000)	4035	6
(6000)	5849	6

Buffer storage tank – cold storage tank

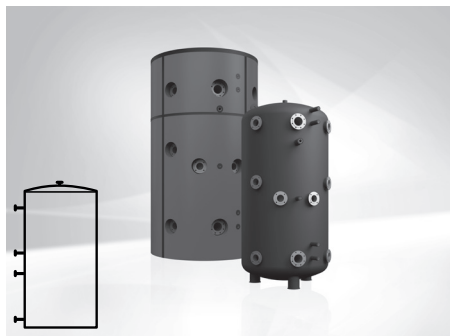

**EnerVal G cool (800-6000)**

Steel tank raw on the inside  
Cold storage tank mounted with cold insulation

EnerVal G cool type	Content l
(800)	793
(1000)	889
(1500)	1440
(2500)	2518
(4000)	4035
(6000)	5849

**Electric heating elements**

see chapter "Electric heating elements"

Accessories



**Protective tube immersion**

sleeve set 200 1/2", 4 x  
For installation of maximum 4 sensors  
Nickel-plated brass  
Installation length = 187 mm  
Outer Ø: 18 mm, inner Ø: 16 mm  
including 3 segment springs 90°,  
1 Omega clamping spring

6061 045

**Protective tube immersion sleeve SB280 1/2"**

Nickel-plated brass  
Installation length = 280 mm  
Outer Ø: 9 mm, inner Ø: 7 mm

2018 837

**Thermal insulation for EnerVal G cool**

made of polyester fibre fleece  
Outer plastic jacket colour red with patented  
aluminium sealing bracket

Type	Polyester fibre fleece
(800)	120 mm
(1000)	120 mm
(1500)	140 mm
(2500)	140 mm
(4000)	140 mm
(6000)	140 mm

6061 134  
6061 135  
6061 136  
6061 137  
6061 138  
6061 139

Services



**Services and associated scope of services**


see separate catalogue "HoVal Services"

Commissioning by HoVal customer service is a prerequisite for warranty/guarantee activation.


**EnerVal G cool (800-6000)**

Type		(800)	(1000)	(1500)	(2500)	(4000)	(6000)
• Volume	l	793	889	1440	2518	4035	5849
• Max. operating/test pressure	bar	6/8	6/8	6/8	6/8	6/8	6/8
• Min. operating temperature	°C	5	5	5	5	5	5
• Max. operating temperature	°C	85	85	85	85	85	85
• Cold insulation synthetic rubber	mm	19	19	19	19	19	19
• Cold insulation $\lambda$ 0 °C	W/mK	0.033	0.033	0.033	0.033	0.033	0.033
• Cold insulation $\lambda$ 40 °C	W/mK	0.037	0.037	0.037	0.037	0.037	0.037
• Fire protection class		B-s3,d0	B-s3,d0	B-s3,d0	B-s3,d0	B-s3,d0	B-s3,d0
• Transport weight	kg	171	189	306	468	694	902
• Water vapour diffusion resistance $\mu$		$\geq 7000$	$\geq 7000$	$\geq 7000$	$\geq 7000$	$\geq 7000$	$\geq 7000$
• Dimensions		see dimensional drawing					


Velocity into the connection nozzle and inflow velocity with flow diversion  
EnerVal G cool (800-2500)

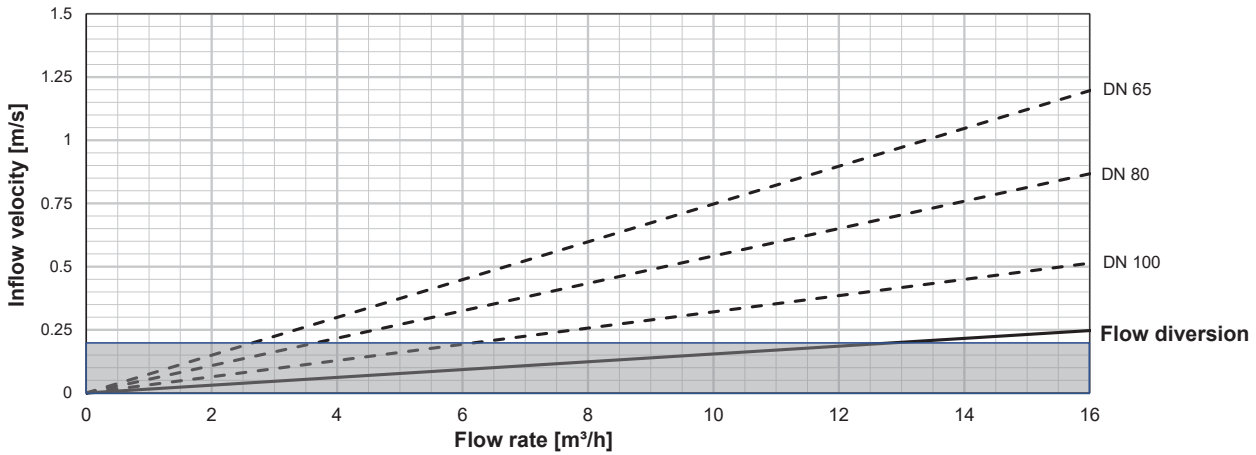

EnerVal G cool (4000,6000)

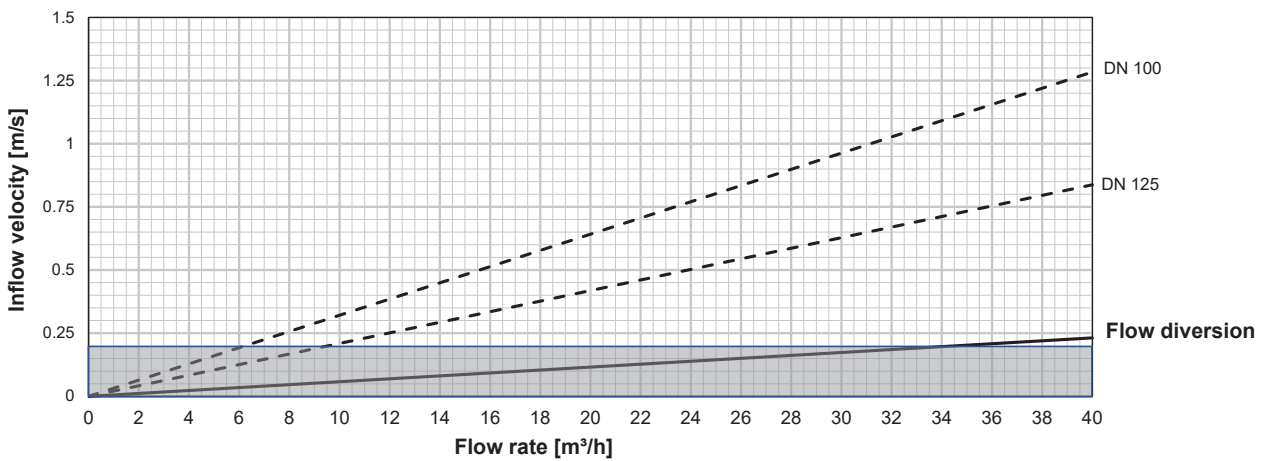




Example of inlet velocity distribution by flow diversions EnerVal G cool (800,1000)

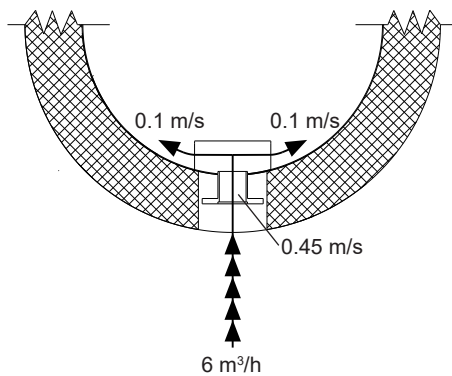

**EnerVal G cool (800-6000)**

Dimensions incl. cold insulation (series)  
(Dimensions in mm)

Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm

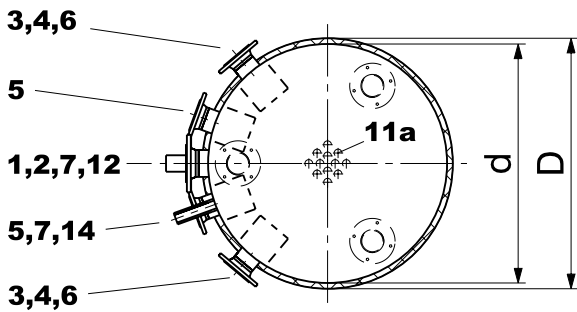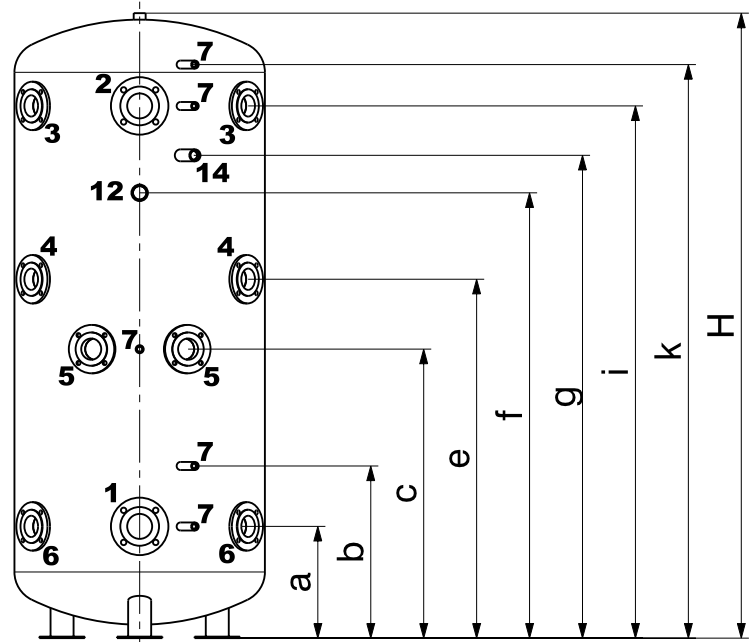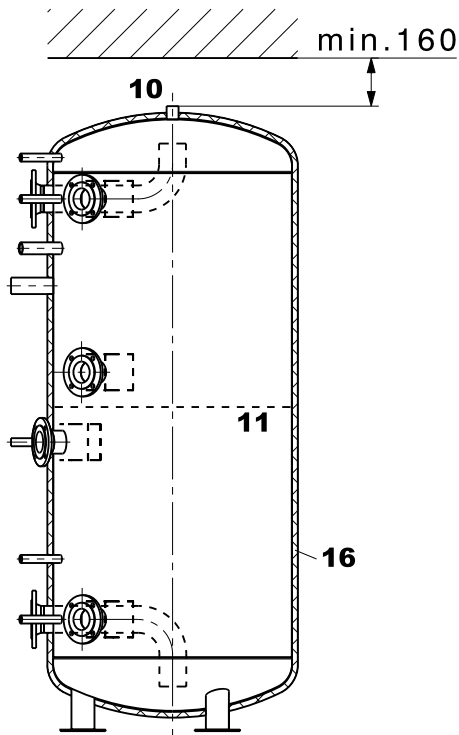

Type (800-6000)	pitch circle Ø
DN 65, PN 6	130 mm
DN 80, PN 6	150 mm
DN 100, PN 6	170 mm
DN 125, PN 6	200 mm

Type (800,1000)	Type (1500,2500)	Type (4000,6000)
DN 80, 4 x M16*	DN 100, 4 x M16*	DN 125, 8 x M16*
DN 80, 4 x M16*	DN 100, 4 x M16*	DN 125, 8 x M16*
DN 65, 4 x M12*	DN 80, 4 x M16*	DN 100, 4 x M16*
DN 65, 4 x M12*	DN 80, 4 x M16*	DN 100, 4 x M16*
DN 65, 4 x M12*	DN 80, 4 x M16*	DN 100, 4 x M16*
DN 65, 4 x M12*	DN 80, 4 x M16*	DN 100, 4 x M16*
G 1/2" (IT)	G 1/2" (IG)	G 1/2" (IT)
G 1" (IT)	G 1" (IG)	G 1" (IT)
12 x	12 x	24 x
G 1 1/2" (IT)	G 1 1/2" (IT)	G 1 1/2" (IT)
G 1" (IT)		


- 1 Cooling connection flow discharge (bend pipe)
- 2 Cooling connection return discharge (bend pipe)
- 3 Cold generator connection return top (inflow restrictor)
- 4 Cold generator connection flow top (inflow restrictor)
- 5 Cold generator connection return bottom (inflow restrictor)
- 6 Cold generator connection flow bottom (inflow restrictor)
- 7 Sleeve for immersion sleeve, thermostat or thermometer
- 10 Possible air vent
- 11 Separating plate
- 11a Holes in the separating plate
- 12 Connection for electric heating element
- 14 Connection for circulation lance, **attention:** only for type (800,1000)
- 16 Cold insulation, thickness 19 mm
- \* The screw holes have threads
- \*\* Dimension for transport into building = D

**EnerVal G cool**

type	D**	d	H	a	b	c	e	f	g	i	k	Tilting measure
(800)	828	790	1866	327	496	810	1041	1269	1402	1527	1684	1882
(1000)	828	790	2066	369	569	955	1186	1472	1596	1759	1894	2080
(1500)	1028	990	2140	378	549	914	1164	1380	-	1699	1916	2158
(2500)	1288	1250	2448	435	645	1050	1302	1595	-	1903	2211	2475
(4000)	1438	1400	2975	485	780	1386	1638	2227	-	2535	2735	2999
(6000)	1638	1600	3303	523	840	1473	1873	2523	-	2823	3023	3342

**EnerVal G cool (800-6000)**

Dimensions with thermal insulation (optional)  
(Dimensions in mm)

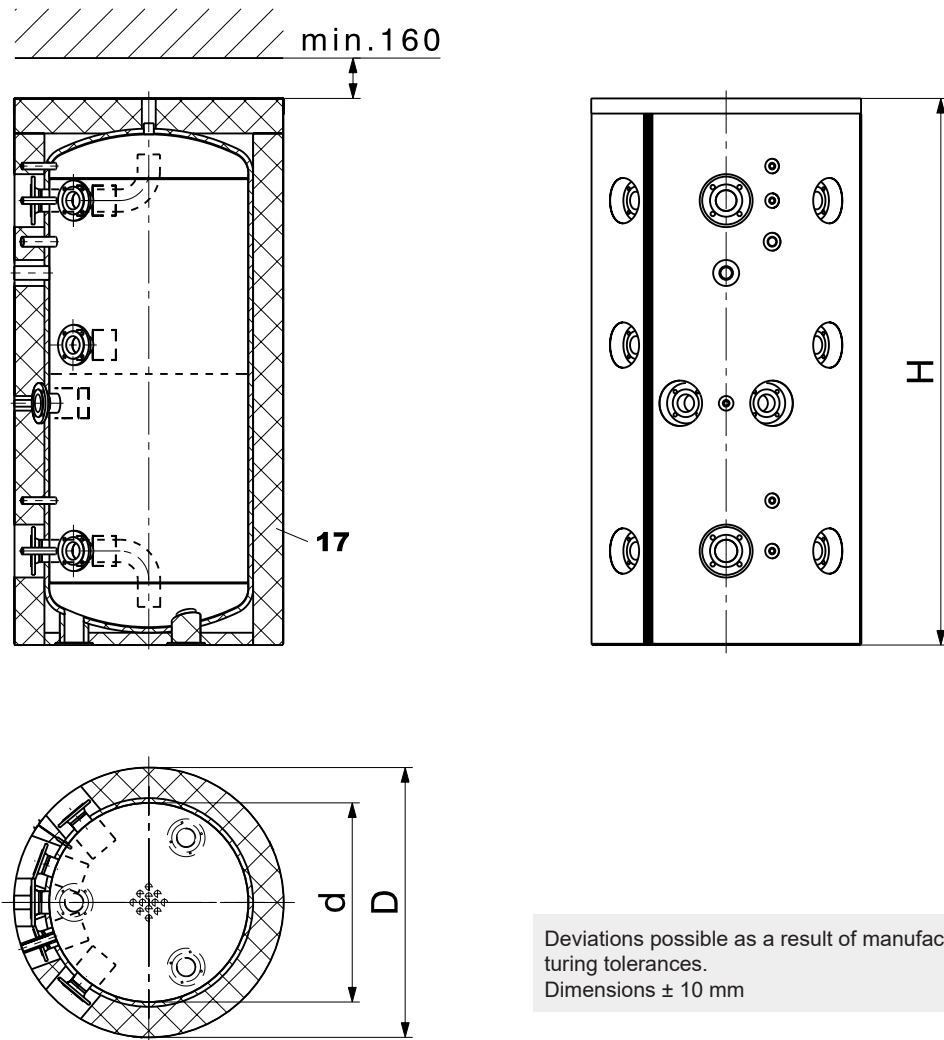

Deviations possible as a result of manufacturing tolerances.  
Dimensions  $\pm 10$  mm

17 Thermal insulation, thickness  
(in addition to the 19 mm cold insulation)

Type (800,1000)	Type (1500,2500)	Type (4000,6000)
120 mm	140 mm	140 mm

EnerVal G cool type	D	d	H
(800)	1068	790	1961
(1000)	1068	790	2161
(1500)	1308	990	2255
(2500)	1568	1250	2563
(4000)	1718	1400	3090
(6000)	1918	1600	3418

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval DuoVal

Compact storage tanks for heat pumps  
DuoVal E (100/300), DuoVal C (100/300)





**Table of contents**

■ Description	5
■ Part numbers	6
■ Technical data	10
■ Dimensions	13



**HoVal DuoVal E (100/300) compact storage tank**

**Compact storage tank for heat pumps with integrated buffer storage tank (100 litres) and calorifier made of steel, enamelled inside (300 litres)**

- Floor-mounted compact storage tank
- Thermal insulation made from polyurethane rigid foam, foam-lined on the storage tank
- Removable foil jacket, colour flame red (RAL 3000)
- Integrated 100 litre buffer storage tank made of steel for heating/cooling
  - 4 heating connections G 1½"
  - 1 sleeve G 1½" for electric heating element
  - 2 sensor immersion sleeves welded in
  - 2 sleeves G ½" for venting/draining
- Integrated 300 litre calorifier made of steel, enamelled on the inside
  - Plain-tube heat exchanger, enamelled, permanently installed
  - 2 heating connections G 1¼"
  - 1 cold water connection G 1¼"
  - 1 domestic hot water connection G 1¼"
  - 1 circulation connection G ½"
  - 2 sleeves G ½" for sensors
  - 1 sleeve G ½" for thermometer
  - 1 connection G 1¼" magnesium protection anode or Correx® impressed current anode
  - 1 hand-hole flange (flange-mounted electric heating element), Ø 180/120 mm

**DuoVal C (100/300)**

**Compact storage tank for heat pumps with integrated buffer storage tank (100 litres) and calorifier made of stainless steel (300 litres)**

- Floor-mounted compact storage tank
- Thermal insulation made from polyurethane rigid foam, foam-lined on the storage tank
- Removable foil jacket, colour flame red (RAL 3000)
- Integrated 100 litre buffer storage tank made of steel for heating/cooling
  - 4 heating connections G 1¼"
  - 1 sleeve G 1½" for electric heating element
  - 2 sensor immersion sleeves welded in
  - 2 sleeves G ½" for venting/draining
- Integrated 300 litre calorifier made of stainless steel
  - Plain tube heat exchanger made of stainless steel, permanently installed
  - 2 heating connections G 1¼"
  - 1 cold water connection G 1¼"
  - 1 domestic hot water connection G 1¼"
  - 1 circulation connection G ½"
  - 2 sleeves G ½" for sensors
  - 1 sleeve G ½" for thermometer
  - 1 connection G 1¼" Correx® impressed current anode
  - 1 hand-hole flange (flange-mounted electric heating element), Ø 180/120 mm



**Model range**

DuoVal		
type		
E	(100/300)	B
C	(100/300)	B
A* → F		

**DuoVal E/C (100/300)**

Compact storage tanks for the following HoVal heat pumps

- HoVal UltraSource® B comfort C (8,11)
- HoVal Belaria® pro comfort (8,13)
- HoVal Belaria® comfort ICM (8,13)
- Daikin Altherma 3 H HT W (14,18)
- HoVal UltraSource® T comfort (8,13)

**Delivery**

- Compact storage tank with foil jacket, completely installed and packed
- Foil jacket can be removed for installation
- DuoVal E (100/300) with enclosed magnesium protection anode for on-site installation

**Included in the scope of delivery:**

- 3 adjustable feet
- 2 sensor immersion sleeves ½" incl. PG screw connection for calorifier
- 2 sensor clamping springs for the welded-in immersion sleeves in the buffer
- 1 thermometer incl. immersion sleeve ½"

**Compact storage tank**



**Hoval DuoVal**

Compact storage tank for heat pumps with integrated buffer storage tank and calorifier

DuoVal	Buffer storage tank	Calorifier
	I	I
E (100/300)	101	295
C (100/300)	101	293

**Part No.**

7019 485  
7019 486

**Authorisation number**

DuoVal E/C	SVGW test number
DuoVal E (100/300)	2409-7360
DuoVal C (100/300)	2409-7361

**Energy efficiency class**  
see "Description"


**Accessories**



**Kit Correx® impressed current anode UP2.3-919-L395/1**

for long-term corrosion protection for installation in the enamelled calorifier with reduction R 1¼" (ET) - Rp 1" (IT) and R 1" (ET) - Rp ¾" (IT)  
Installation length: 395 mm  
Connection cable length: 1 x 2000 mm  
1 Correx® impressed current anode

684 760



**Kit Correx® impressed current anode UP1.9-924-L395/1**

for long-term corrosion protection for installation in the stainless steel calorifier with reduction R 1½" - Rp ¾" and R 1¼" - Rp ¾"  
Installation length: 395 mm  
Connection cable length: 1 x 3500 mm  
1 Correx® impressed current anode (up to 800 l)

6031 813

With the DuoVal E, either the supplied magnesium protection anode or (optionally) a Correx® impressed current anode must be used.  
With the DuoVal C, a Correx® impressed current anode can be used as an option.



**Screw set**

for flange-mounted electric heating element  
- EFHK-E (4-180)  
- EFHK-C (4-180)  
- EFHK-E/C (3.5-180-PV)  
- EFHK-E/C (4.4-180-PV)  
Consisting of:  
8 hexagon head screws M12 x 30 including washers

6063 095

**Electric heating elements for calorifier DuoVal E (100/300)**

*The following flange-mounted electric heating elements can be installed in the calorifier:*



**Flange-mounted electric heating element**

- for enamelled calorifiers and buffer storage tanks
- Incoloy® alloy 825 heating rods
- Stainless steel flange Ø 180 mm, pitch circle 150 mm
- Medium: DHW and heating water
- Unheated zone: 100 mm
- Setting range: 7... 34 ... 80°C
- Safety temperature limiter: 95 °C
- Protection class: IPX0
- Casing: approx. Ø 185 x 103 mm
- Max. operating pressure: 10 bar
- Delivered separately, installation on site
- Not suitable for exclusively electric heating (risk of limescale buildup)

EFHK-E type	Heat output 3 x 400 V kW	changeable to	Installation length mm
4-180	4.0		380
		2.6 kW/3 x 400 V	
		2.0 kW/3 x 400 V	
		1.3 kW/3 x 400 V	
		1.3 kW/1 x 230 V	

6053 353



**Photovoltaic flange-mounted electric heating element**

- for enamelled calorifiers, stainless steel calorifiers and buffer storage tanks
- Incoloy® alloy 825 heating rods
- Ø 180 mm flange, pitch circle 150 mm
- LAN, Modbus TCP, 0-10 V DC
- Medium: DHW and heating water
- Voltage: 3 x 400 V
- Unheated zone: 70 mm
- Setting range: 0 ... 60 ... 85 °C
- Safety temperature limiter: 110 °C
- Protection class: IP21
- Casing: Ø 186 mm
- Max. operating pressure: 10 bar
- Delivered separately, installation on site
- Not suitable for exclusively electric heating (risk of limescale buildup)

EFHK-E/C type	Heat output 3 x 400 V kW	Output levels kW	Installation length mm
3.5-180-PV	3.5	7 x 0.50	360
4.4-180-PV	4.4	7 x 0.65	420

6063 624

6063 625

**Electric heating elements for calorifier  
DuoVal C (100/300)**

*The following flange-mounted electric heating elements can be installed in the calorifier:*



**Flange-mounted electric heating element**

- for stainless steel calorifiers
- Incoloy® alloy 825 heating rods
- Stainless steel flange Ø 180 mm, pitch circle 150 mm
- Medium: DHW and heating water
- Unheated zone: 100 mm
- Setting range: 7 ... 34 ... 80 °C
- Safety temperature limiter: 95 °C
- Protection class: IPX0
- Casing: approx. Ø 185 x 103 mm
- Max. operating pressure: 10 bar
- Delivered separately, installation on site
- Not suitable for exclusively electric heating (risk of limescale buildup)

EFHK-C type	Heat output 3 x 400 V kW	changeable to	Installation length mm
4-180	4.0		380
		2.6 kW/3 x 400 V	
		2.0 kW/3 x 400 V	
		1.3 kW/3 x 400 V	
		1.3 kW/1 x 230 V	

**Part No.**

6049 564



**Photovoltaic flange-mounted electric heating element**

- for enamelled calorifiers, stainless steel calorifiers and buffer storage tanks
- Incoloy® alloy 825 heating rods
- Ø 180 mm flange, pitch circle 150 mm
- LAN, Modbus TCP, 0-10 V DC
- Medium: DHW and heating water
- Voltage: 3 x 400 V
- Unheated zone: 70 mm
- Setting range: 0 ... 60 ... 85 °C
- Safety temperature limiter: 110 °C
- Protection class: IP21
- Casing: Ø 186 mm
- Max. operating pressure: 10 bar
- Delivered separately, installation on site
- Not suitable for exclusively electric heating (risk of limescale buildup)

EFHK-E/C type	Heat output 3 x 400 V kW	Output levels kW	Installation length mm
3.5-180-PV	3.5	7 x 0.50	360
4.4-180-PV	4.4	7 x 0.65	420

6063 624

6063 625

**Electric heating elements for buffer storage tanks DuoVal E/C (100/300)**

The following screw-in electric heating elements can be installed in the **buffer storage tank**:



- Screw-in electric heating element**  
for enamelled calorifiers, stainless steel calorifiers and buffer storage tank
- Incoloy® alloy 825 heating rods
  - Brass nipple G 1½"
  - Medium: DHW and heating water
  - Unheated zone: 150 mm
  - Setting range: 7 ... 34 ... 80 °C
  - Safety temperature limiter: 95 °C
  - Protection class: IP54
  - Casing: approx. 90 x 90 x 140 mm
  - Max. operating pressure: 10 bar
  - Delivered separately, installation on site
  - Not suitable for exclusively electric heating (risk of limescale buildup)

EP type	Heat output kW	Output levels V	Installation length mm
2.5	2.35	3 x 400 (1 x 230)	390
3.5	3.6	3 x 400	500

6059 778  
6059 779



- Photovoltaic screw-in electric heating element**  
for enamelled calorifiers and stainless steel calorifiers
- Incoloy® alloy 825 heating rods
  - Brass nipple R 1½"
  - LAN, Modbus TCP, 0-10 V DC
  - Medium: DHW and heating water
  - Voltage: 3 x 400 V
  - Unheated zone: 150 mm
  - Setting range: 0 ... 60 ... 85 °C
  - Safety temperature limiter: 110 °C
  - Protection class: IP41
  - Casing: 126 x 135 mm
  - Max. operating pressure: 10 bar
  - Delivered separately, installation on site
  - Not suitable for exclusively electric heating (risk of limescale buildup)

EP type	Heat output 3 x 400 V kW	Output levels kW	Installation length mm
3.5-1½"-PV	3.5	7 x 0.50	600

6063 629

DuoVal E (100/300), DuoVal C (100/300)

Type		E (100/300)	C (100/300)
<b>Storage tank</b>			
• Transport weight	kg	174	130
• Tilting measure	mm	1970	1970
• Thermal insulation polyurethane rigid foam, foam-lined	mm	80	80
• Thermal insulation $\lambda$	W/mK	0.024	0.024
• Fire protection class	-	B2	B2
• Heat loss at 65 °C	W	76	76
<b>Buffer storage tank</b>			
• Volume	l	101	101
• Max. operating/test pressure	bar	3/4.5	3/4.5
• Min./max. operating temperature	°C	7/95	7/95
<b>Calorifier</b>			
• Volume	l	295	293
• Max. operating/test pressure	bar	10/15	6/12
• Max. operating temperature	°C	95	95
<b>Heating coil (built-in)</b>			
• Heating surface	m <sup>2</sup>	3.5	3.12
• Heating water	l	21	19
• Pressure drop		see diagram	
• Max. operating/test pressure	bar	10/15	10/15
• Max. operating temperature	°C	110	110
• Dimensions		see dimensional drawing	

Performance figure

at a hot water temperature of 45 °C

Reading example

see engineering

T >	Comfort <sup>1)</sup>			Standard <sup>2)</sup>		
	60°C	70°C	80°C	60°C	70°C	80°C
NL $\nabla$						
1						
2						
3						
4	300			300		
5						
6						
7						
8						
9		300			300	
10			300			300
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

T = heating flow

NL = performance figure


Performance figure NL acc. to DIN 4708 = number of flats which can be supplied with domestic hot water when the calorifier is heated and permanently reheated with the heat generator (standard flat: 1 bathroom – 4 rooms – 3.5 persons)

<sup>1)</sup> Calculation with simultaneity factor according to DIN 4708 (preferred for Switzerland)

<sup>2)</sup> Calculation with simultaneity factor according to Dresden Technical University

**10 min peak output/N number with domestic hot water 45 °C**  
 according to DIN 4708 (Comfort) and Dresden Technical University (Standard)






**Reading example**  
 see Engineering

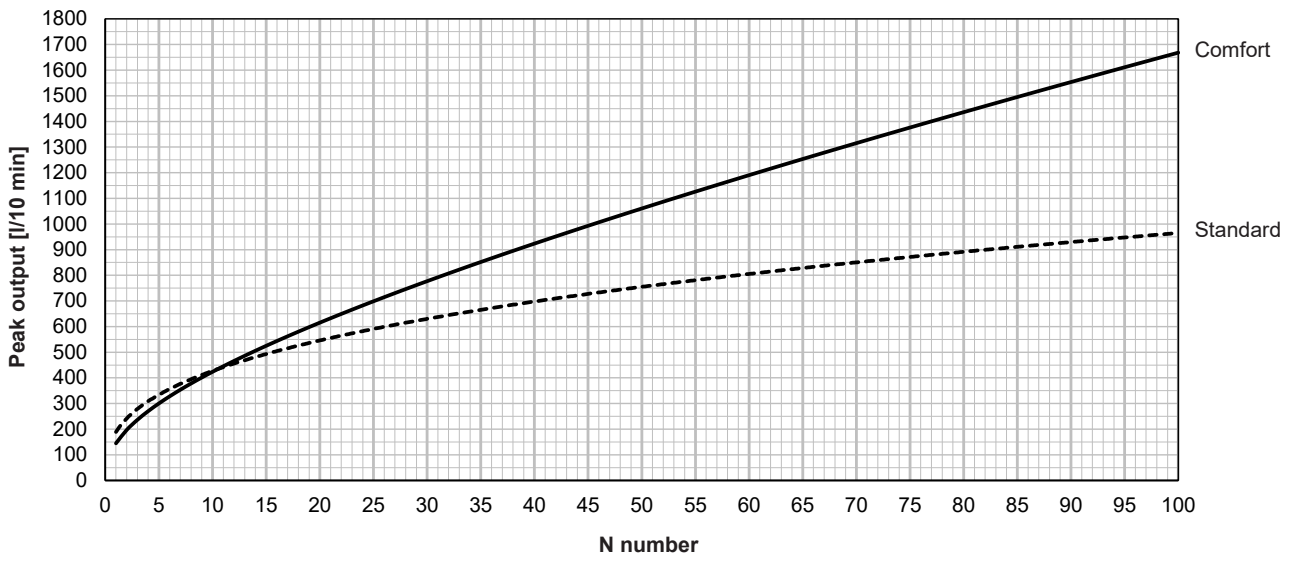

DuoVal E/C



Hot water output  
Continuous output

Reading example  
see engineering

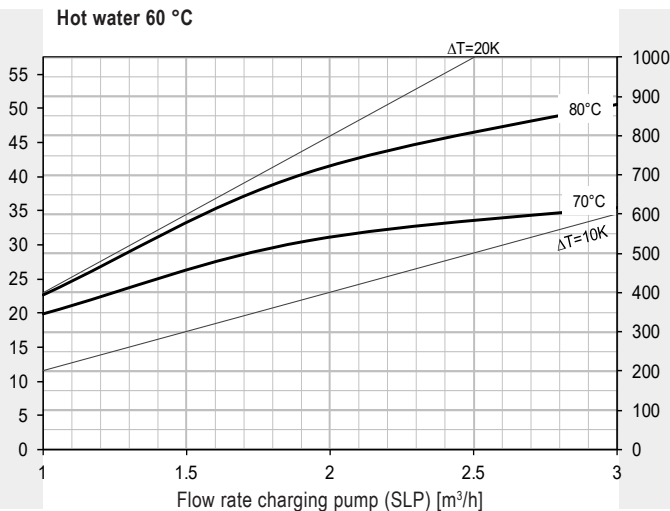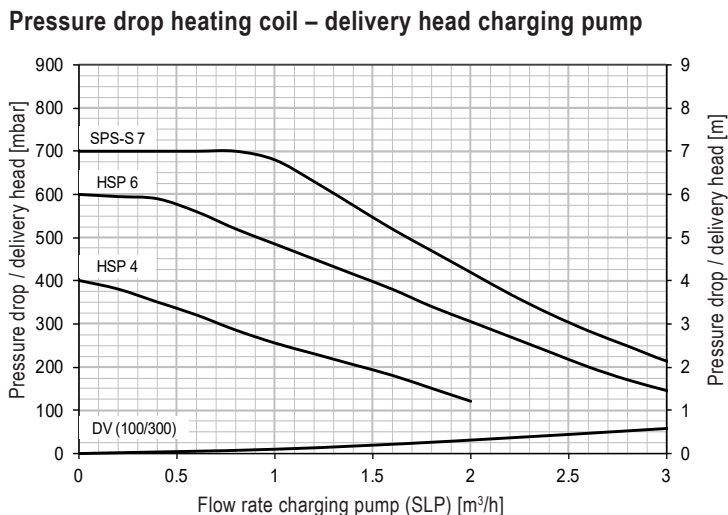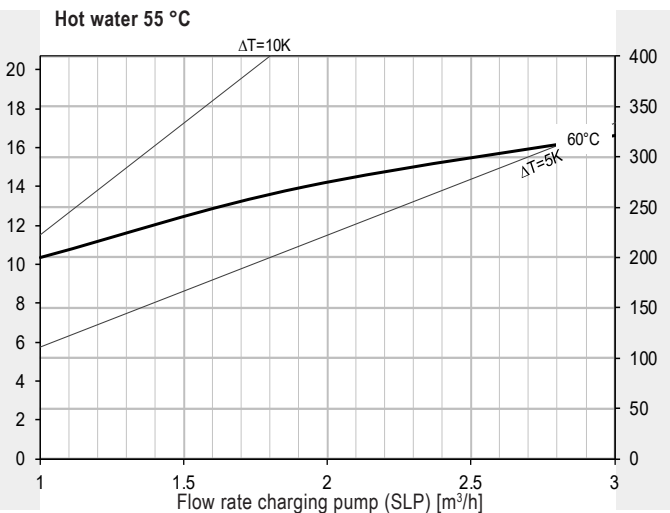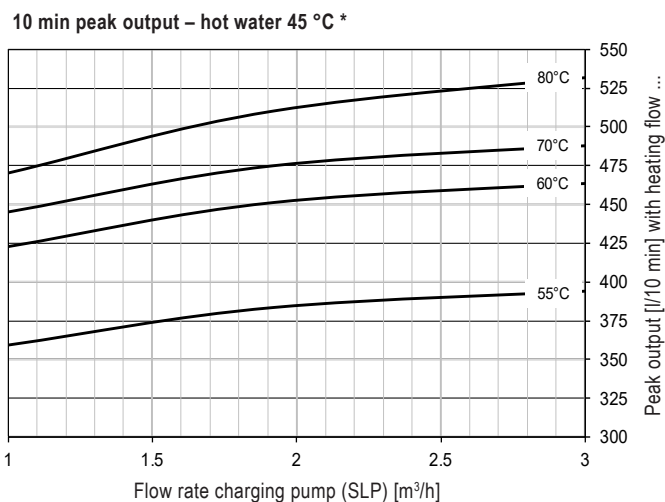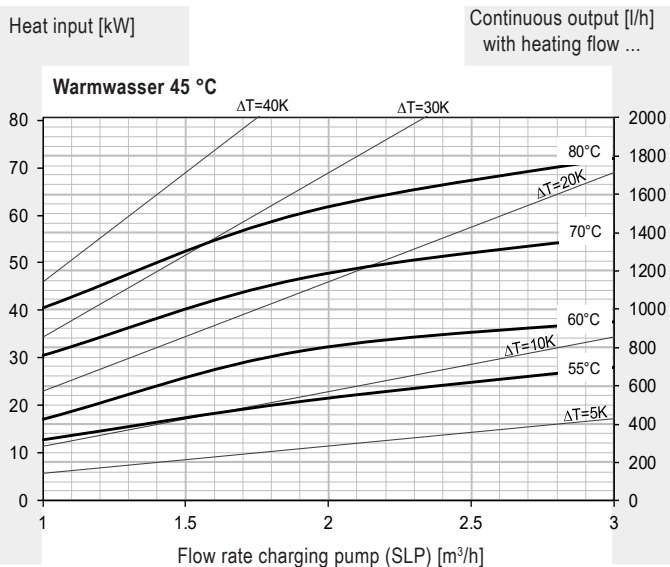

\* Calorifier heated to 60 °C

DuoVal E/C (100/300)  
(Dimensions in mm)

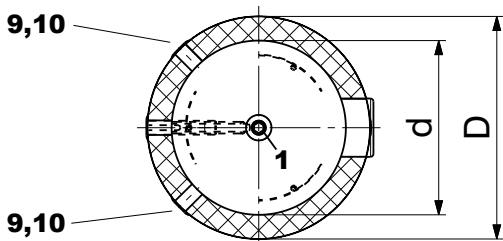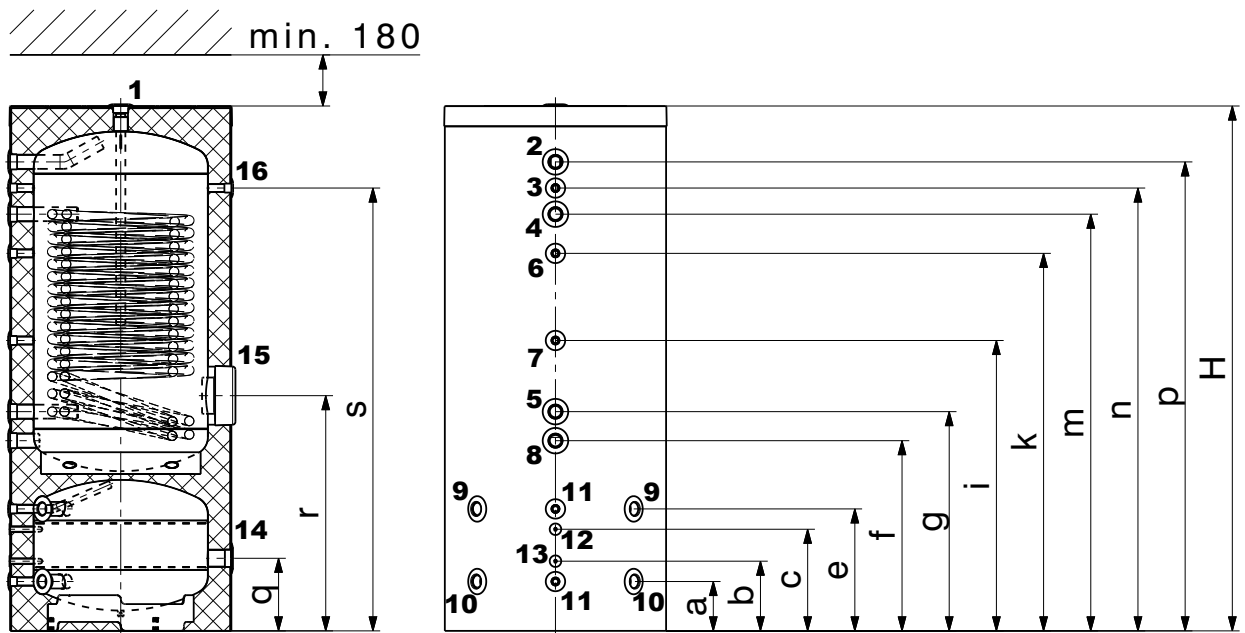

- |   |               |
|---|---------------|
| 1 Anode connection                              | G 1 1/4" (IT) |
| 2 Hot water                                     | G 1 1/4" (IT) |
| 3 Circulation                                   | G 1/2" (IT)   |
| 4 Hot water reheating flow                      | G 1 1/4" (IT) |
| 5 Hot water reheating return                    | G 1 1/4" (IT) |
| 6 Sensor hot water top                          | G 1/2" (IT)   |
| 7 Sensor hot water bottom                       | G 1/2" (IT)   |
| 8 Cold water                                    | G 1 1/4" (IT) |
| 9 Heating flow (heat pump flow)                 | G 1 1/4" (IT) |
| 10 Heating return (heat pump return)            | G 1 1/4" (IT) |
| 11 Venting/drainage                             | G 1/2" (IT)   |
| 12 Buffer sensor top                            | Inner Ø 13 mm |
| 13 Buffer sensor bottom                         | Inner Ø 13 mm |
| 14 Electric heating cartridge (optional)        | G 1 1/2" (IT) |
| 15 Flange/electric heating cartridge (optional) | 180/120 mm    |
| 16 Thermometer                                  | G 1/2" (IT)   |

Deviations possible as a result of manufacturing tolerances.  
Dimensions ± 10 mm

DuoVal E/C

type	D	d	H	a	b	c	e	f	g	i	k	m	n	p	q	r	s	Tilting measure
(100/300)	760	600	1800	170	240	350	420	655	755	1000	1300	1435	1525	1615	250	810	1525	1970

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein


Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval electric heating elements

Screw-in and flange-mounted electric heating elements

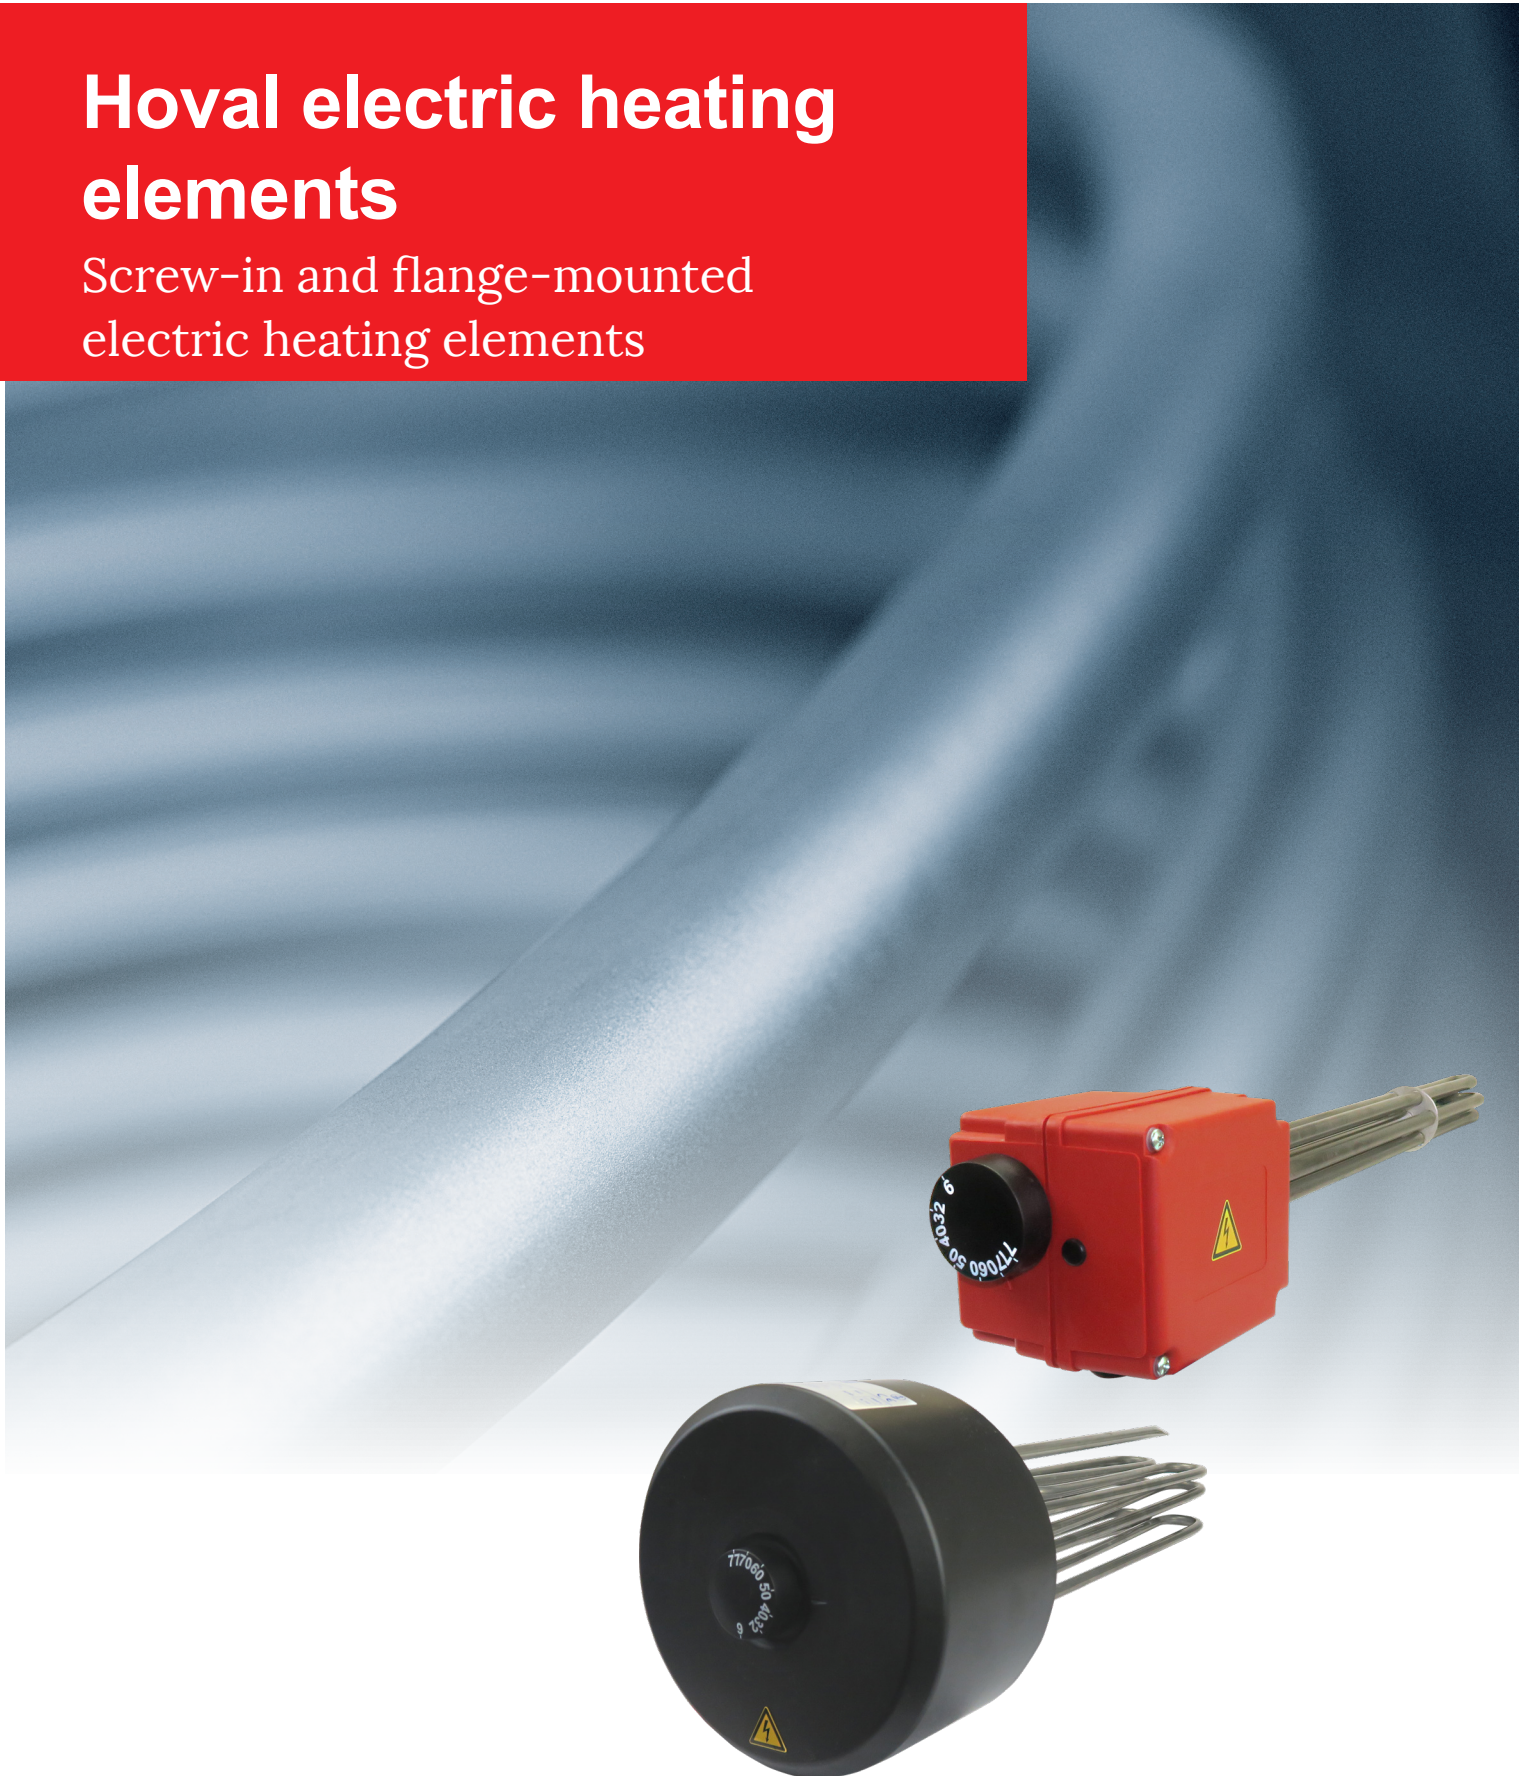



**Table of contents**

■ Description	5
■ Part numbers	6
■ Dimensions	10
■ Engineering	12



## Hoval electric heating element

### Screw-in electric heating element Type EP 2.5 to EP 7.5

The electric heating element consists of three U-shaped round heating rods and a thermostat protection tube mounted in a 1½" brass nipple, a flat seal is included in the scope of delivery. Due to the insulated installation of the round heating rods, the units are also suitable for enamelled calorifiers. The unheated zone is 150 mm for all outputs.

### Flange-mounted electric heating element Type EFHK-E/C 4 to 9

The electric heating element consists of three U-shaped round heating rods, each pressed into a press nipple. These are screwed onto a stainless steel flange with thermostat protection tube, a flange seal (EPDM) is included in the scope of delivery. A food-safe plastic disc (PVDF) serves as insulation. The unheated zone is 100 mm for all outputs.

### Features for all electric heating element types


- TR: Electromechanical temperature controller
- STB: Electromechanical safety temperature limiter
- Rotary knob with temperature display
- Incoloy® alloy 825 heating rods
- Connection 3 x 400 V
- Not suitable for exclusively electric heating (risk of limescale buildup)

#### Delivery

Included in separate packaging

#### On site

Observe the position and installation of the electric heating element in the buffer storage tank/storage tank with heating coil, if necessary according to the schematic diagram and/or structural conditions.

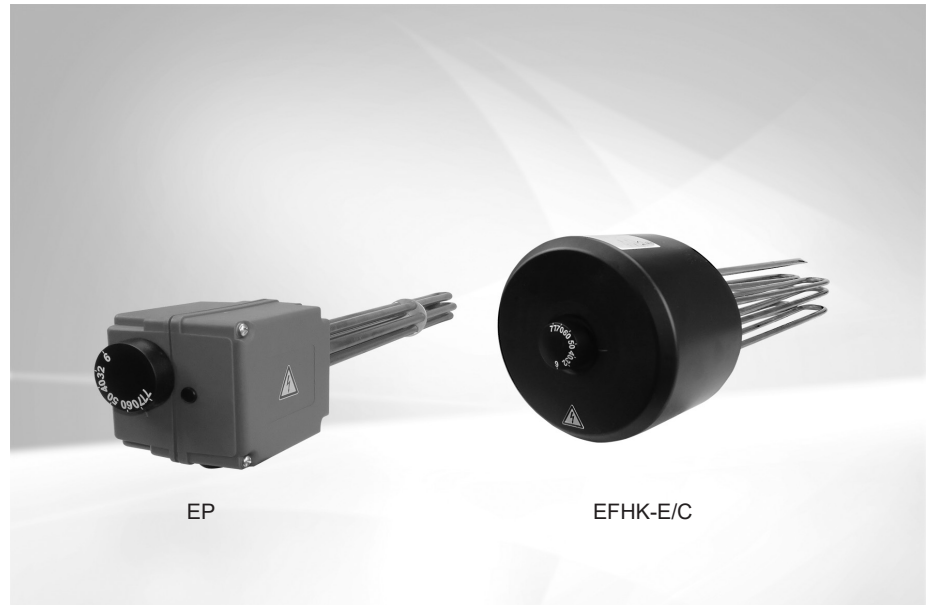

Range type	Output kW	Installation length mm
<b>Screw-in electric heating element for enamelled calorifiers, stainless steel calorifiers and buffer storage tank</b>		
EP-2.5-1½"	2.35	390
EP-3.5-1½"	3.6	500
EP-5.0-1½"	4.9	620
EP-7.5-1½"	7.5	850
<b>Flange-mounted electric heating element for enamelled calorifiers and buffer storage tank</b>		
EFHK-E-4-180	4.0	380
EFHK-E-6-180	6.0	460
EFHK-E-9-180	9.0	615
<b>Flange-mounted electric heating element for stainless steel calorifier</b>		
EFHK-C-4-180	4.0	380
EFHK-C-6-180	6.0	460
EFHK-C-9-180	8.5	670
<b>Flange-mounted electric heating element for buffer storage tanks</b>		
EFHK-E-9-250	8.5	615

Electric heating elements



**Screw-in electric heating element**

for enamelled calorifiers, stainless steel calorifiers and buffer storage tank

- Incoloy® alloy 825 heating rods
- Brass nipple G 1½"
- Medium: DHW and heating water
- Unheated zone: 150 mm
- Setting range: 7... 34 ... 80 °C
- Safety temperature limiter: 95 °C
- Protection class: IP54
- Casing: approx. 90 x 90 x 140 mm
- Max. operating pressure: 10 bar
- Delivered separately, installation on site
- Not suitable for exclusively electric heating (risk of limescale buildup)

EP type	Heat output kW	Output levels V	Installation length mm
2.5	2.35	3 x 400 (1 x 230)	390
3.5	3.6	3 x 400	500
5.0	4.9	3 x 400	620
7.5	7.5	3 x 400	850

Part No.

6059 778  
6059 779  
6059 780  
6059 781



**Flange-mounted electric heating element**

for enamelled calorifiers and buffer storage tanks

- Incoloy® alloy 825 heating rods
- Stainless steel flange Ø 180 mm, pitch circle 150 mm
- Medium: DHW and heating water
- Unheated zone: 100 mm
- Setting range: 7... 34 ... 80 °C
- Safety temperature limiter: 95 °C
- Protection class: IPX0
- Casing: approx. Ø 185 x 103 mm
- Max. operating pressure: 10 bar
- Delivered separately, installation on site
- Not suitable for exclusively electric heating (risk of limescale buildup)

EFHK-E type	Heat output 3 x 400 V kW	changeable to	Installation length mm
4-180	4.0	2.6 kW/3 x 400 V 2.0 kW/3 x 400 V 1.3 kW/3 x 400 V 1.3 kW/1 x 230 V	380
6-180	6.0	4.0 kW/3 x 400 V 3.0 kW/3 x 400 V 2.0 kW/3 x 400 V 2.0 kW/1 x 230 V	460
9-180	9.0	5.7 kW/3 x 400 V 4.2 kW/3 x 400 V 2.8 kW/3 x 400 V 2.8 kW/1 x 230 V	615

6053 353  
6053 354  
6052 438



Flange-mounted electric heating element  
EFHK-E-9-250  
Output 8.5 kW, 3 x 400 V  
For horizontal installation  
in the enamelled calorifier and the  
buffer storage tank with  
flange diameter 257 mm,  
pitch circle 225 mm

Consisting of:  
1 adjustable temperature controller  
3 heating rods made of material 2.4858  
1 safety temperature limiter  
1 glue-on rosette

Technical data:  
Output 8.5 kW  
Connection 3 x 400 V  
Plastic cover  
Installation length 615 mm

Suitable for EnerVal G (1500-6000)


**Part No.**

6053 355

Type		Screw-in electric heating element EP 2.5 to 5	Flange-mounted electric heating element EFHK-E/-C 4 to 9	Flange-mounted electric heating element EFHK-E-9-250
Temperature setting range	°C	7... 34 ... 80	7... 34 ... 80	7... 34 ... 80
Switch-off temperature	°C	95	95	95
Ambient temperature at the switchgear	°C	max. 80	max. 80	max. 80
Thermal switching difference	K	8 ± 4	8 ± 4	8 ± 4
Ambient temperature during storage and transport	°C	-12 ... 80	-12 ... 80	-12 ... 80
Flange/thread size		G 1½" (conical)	Outside Ø 180 mm, pitch circle Ø 150 mm, 8 x M10	Outside Ø 257 mm, pitch circle Ø 225 mm, 10 x M10
Flange/thread connection material		Brass (CuZn40Pb2)	stainless steel (1.4404) Seal: EPDM (KTW approval)	stainless steel (1.4404) Seal: EPDM (KTW approval)
Round heating rods		Incoloy® alloy 825, 2.4858	Incoloy® alloy 825, 2.4858	Incoloy® alloy 825, 2.4858
Surface load	W/cm²	approx. 7	approx. 5	approx. 5
Electrical connection		Screw terminals, PG screwed cable gland	Spring-cage terminals, strain relief, lead-through	Spring-cage terminals, strain relief, lead-through
Operating pressure	bar	Max. 10	Max. 10	Max. 10
Casing top part		Polycarbonate, RAL 3000 (red)	ABS, black	ABS, black
Type of protection		IP54	IPX0	IPX0
Dimensions		See dimensional drawing	See dimensional drawing	See dimensional drawing

**Screw-in electric heating element**


1. Screw-in electric heating element with insulated installation of the round heating rods which are suitable for enamelled as well as black steel calorifiers and, thanks to DIP switch, also for stainless steel calorifiers
2. Standard hexagon profile for secure tightening with 60 mm open-end spanner
3. Cylindrical thread for precise casing position and tight mounting
4. Surface load 7 W/cm²
5. Sensor position in the immersion tube for identical temperature detection of safety temperature limiter and temperature controller

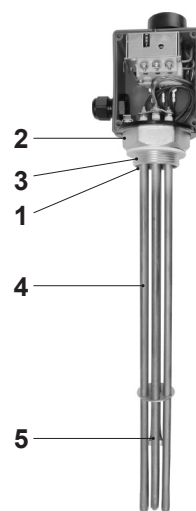

Shown without cover

**Flange-mounted electric heating element**


1. Standard flange outside Ø 180 mm or 257 mm, EFHK-E suitable for enamelled as well as black steel calorifiers and, with EFHK-C, also suitable for stainless steel calorifiers thanks to mounted plastic insulating plate
2. Low surface load 5 W/cm², for less calcification
3. Sensor position in the immersion tube for identical temperature detection of safety temperature limiter and temperature controller
4. Insulated mounting of the heating rods for reduced corrosion

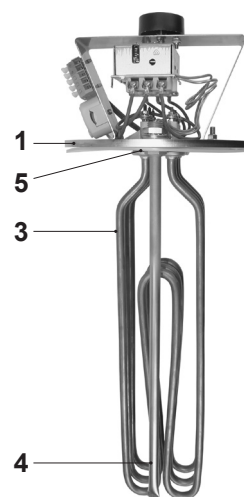


Shown without cover

Connection diagram screw-in electric heating element

230 V: P to L1 / N to L2

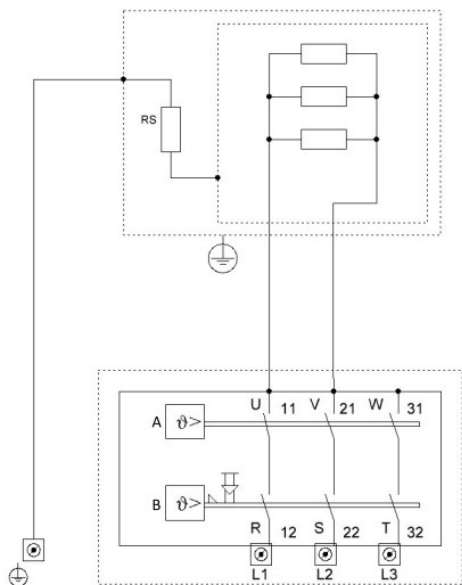

3 ~ 400 V: L1 / L2 / L3


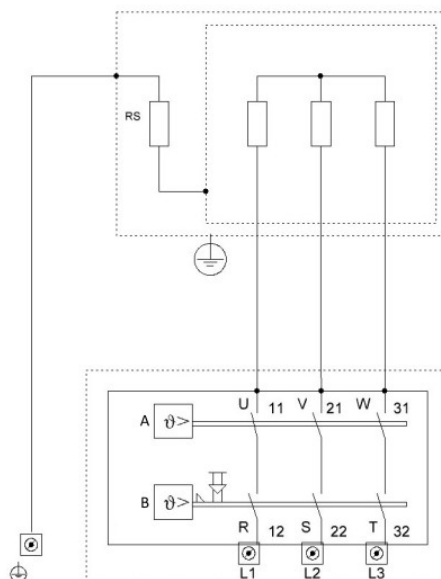


- A) Temperature controller
- B) Safety temperature limiter

Connection diagram flange-mounted electric heating element

3 x 400 V Δ: L1 / L2 / L3

230 V Δ: L1 su N

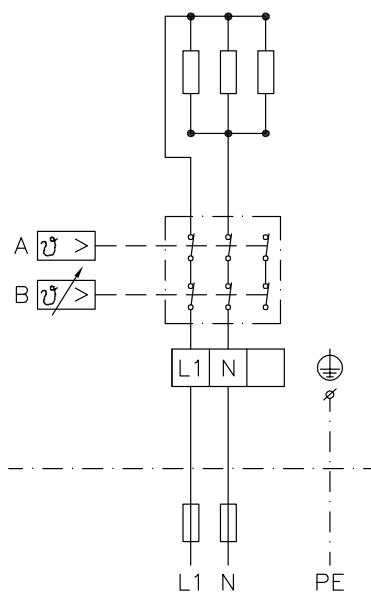
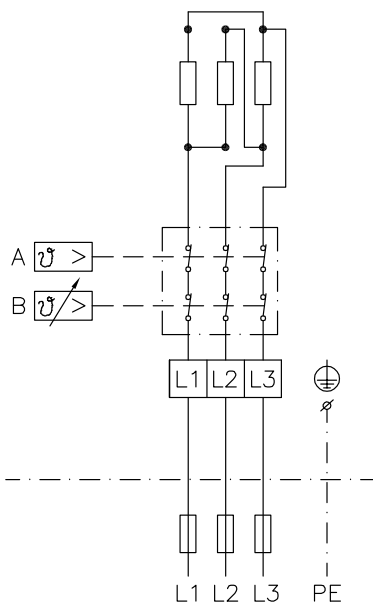


**Screw-in electric heating element**

(Dimensions in mm)

**EP 2.5/3.5/5.0/7.5**

for enamelled calorifiers, stainless steel calorifiers and buffer storage tanks

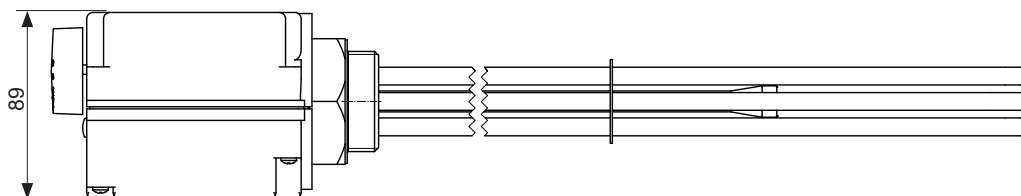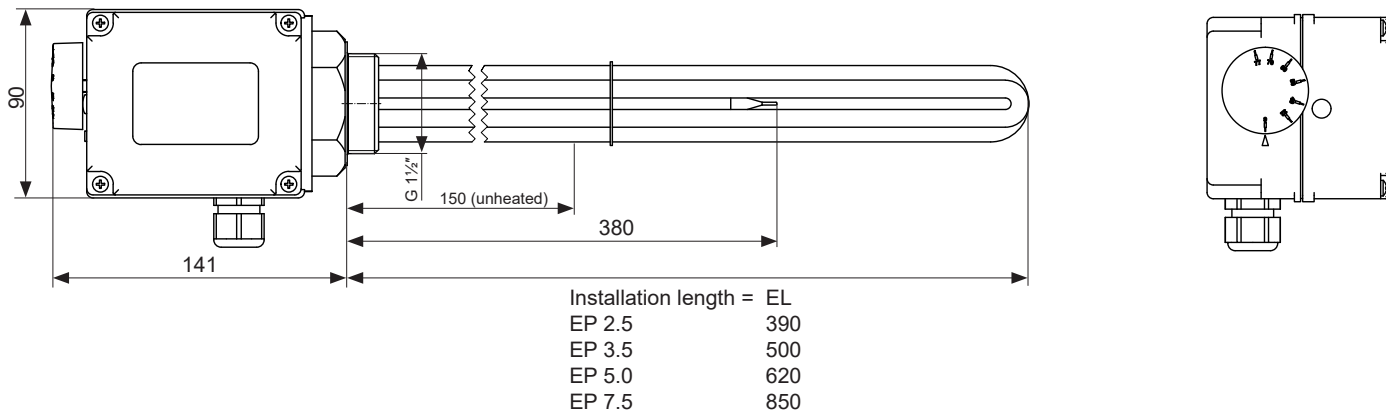


**Flange-mounted electric heating element**

(Dimensions in mm)


**EFHK-E-4/6/9-180**

for enamelled calorifiers and buffer storage tanks

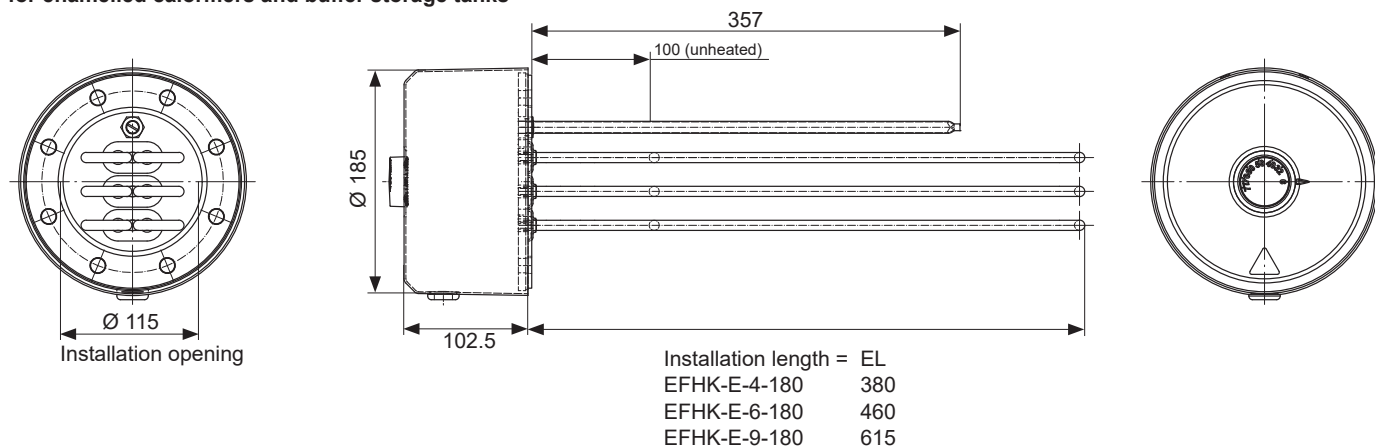

**EFHK-C-4/6/9-180**


for stainless steel calorifiers

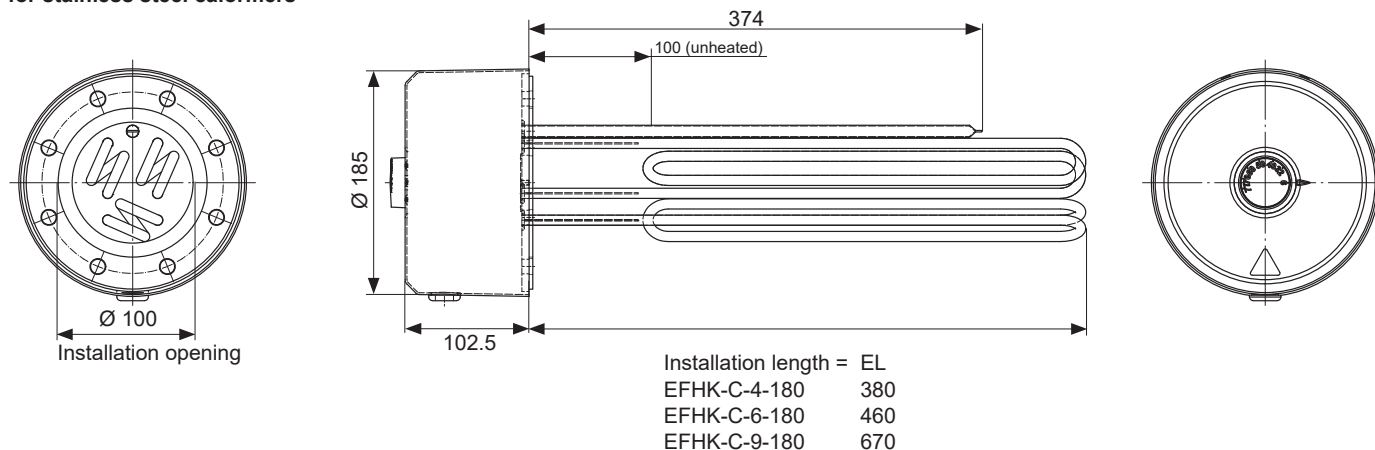

**Flange-mounted electric heating element**  
(Dimensions in mm)

**EFHK-E-9-250**

For horizontal installation in the enamelled calorifier

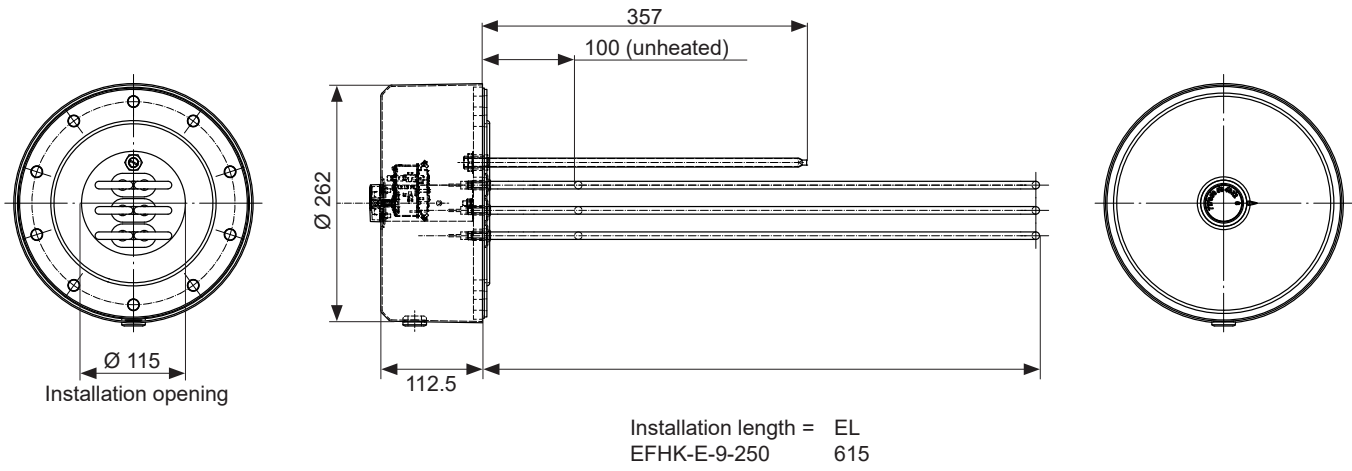

Calorifier/storage tank	Screw-in electric heating element				Flange-mounted electric heating element											
	EP 2.5 2.35 kW	EP 3.5 3.6 kW	EP 5 4.9 kW	EP 7.5 7.5 kW	EFHK-E- 4-180 4.0 kW	EFHK-E- 6-180 6.0 kW	EFHK-E- 9-180 9.0 kW	EFHK-C- 4-180 4.0 kW	EFHK-C- 6-180 6.0 kW	EFHK-C- 9-180 8.5 kW	EFHK-E- 9-250 8.5 kW					
Installation type	Sleeve 1½"				Flange Ø 180								Ø 257			
Installation position					t	b	t	b	t	b	t	b	t	b	t	b
<b>Stainless steel calorifier</b>																
<i>CombiVal C</i>																
CombiVal C (300)																
CombiVal C (400)																
CombiVal C (500)																
CombiVal C (750)																
CombiVal C (1000)																
CombiVal C (1500)																
CombiVal C (2000)																
CombiVal C (2500)																
<i>CombiVal CR</i>																
CombiVal CR (200)																
CombiVal CR (300)																
CombiVal CR (500)																
CombiVal CR (800)																
CombiVal CR (1000)																
<i>CombiVal CSR</i>																
CombiVal CSR (300)																
CombiVal CSR (400)																
CombiVal CSR (500)																
CombiVal CSR (800)																
CombiVal CSR (1000)																
CombiVal CSR (1250)																
CombiVal CSR (1500)																
CombiVal CSR (2000)																
<b>Enamelled calorifier</b>																
<i>CombiVal E</i>																
CombiVal E (300)																
CombiVal E (500)																
CombiVal E (800)																
CombiVal E (1000)																
CombiVal E (1500)																
CombiVal E (2000)																
<i>CombiVal ER</i>																
CombiVal ER (200)																
CombiVal ERW (200)																
CombiVal ER (300)																
CombiVal ER (400)																
CombiVal ER (500)																
CombiVal ER (800)																
CombiVal ER (1000)																
<i>CombiVal ESR</i>																
CombiVal ESR (200)																
CombiVal ESR (300)																
CombiVal ESR (400)																
<i>CombiVal ESSR</i>																
CombiVal ESSR (500)																
CombiVal ESSR (800)																
CombiVal ESSR (1000)																
<i>MultiVal ERR</i>																
MultiVal ERR (300)																
MultiVal ERR (400)																
MultiVal ERR (500)																
<i>MultiVal ESRR</i>																
MultiVal ESRR (500)																
MultiVal ESRR (800)																
MultiVal ESRR (1000)																

\* On-site delivery of an adapter flange for the installation of the flange-mounted electric heating element

Calorifier/storage tank	Screw-in electric heating element				Flange-mounted electric heating element											
	EP 2.5 2.35 kW	EP 3.5 3.6 kW	EP 5 4.9 kW	EP 7.5 7.5 kW	EFHK-E- 4-180 4.0 kW	EFHK-E- 6-180 6.0 kW	EFHK-E- 9-180 9.0 kW	EFHK-C- 4-180 4.0 kW	EFHK-C- 6-180 6.0 kW	EFHK-C- 9-180 8.5 kW	EFHK-E- 9-250 8.5 kW					
Installation type	Sleeve 1½"				Flange Ø 180											
Installation position	t	b	t	b	t	b	t	b	t	b	t	b	t	b	t	b
<b>Buffer storage tank</b>																
<i>EnerVal</i>																
EnerVal (200)	•		•													
EnerVal (300)	•		•													
EnerVal (500)	•	•	•	•	•	•										
EnerVal (800)	•	•	•	•	•	•	•	•								
EnerVal (1000)	•	•	•	•	•	•	•	•	•							
EnerVal (1500)	•	•	•	•	•	•	•	•	•							
EnerVal (2000)	•	•	•	•	•	•	•	•	•							
<i>EnerVal G</i>																
EnerVal G (800)							•	•	•	•	•	•				
EnerVal G (1000)							•	•	•	•	•	•				
EnerVal G (1500)															•	•
EnerVal G (2000)															•	•
EnerVal G (2500)															•	•
EnerVal G (4000)															•	•
EnerVal G (6000)															•	•
<i>EnerVal G cool</i>																
EnerVal G cool (800)	•		•		•		•									
EnerVal G cool (1000)	•		•		•		•									
EnerVal G cool (1500)	•		•		•		•									
EnerVal G cool (2500)	•		•		•		•									
EnerVal G cool (4000)	•		•		•		•									
EnerVal G cool (6000)	•		•		•		•									
<b>Stratified storage tank</b>																
<i>VarioVal FLS/Rxx</i>																
VarioVal FLS (800)	•		•		•											
VarioVal FLS (1000)	•		•		•											
VarioVal RHS (800)	•		•		•											
VarioVal RHS (1000)	•		•		•											
VarioVal RL (600)	•		•		•											
VarioVal RLS (800)	•		•		•											
VarioVal RLS (1000)	•		•		•											

Legend:  
t: top, b: bottom

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

## Hoval photovoltaic electric heating elements

Screw-in and flange-mounted electric heating elements with RemoteControl





**Table of contents**

■ Description	5
■ Part numbers	7
■ Technical data	8
■ Dimensions	15
■ Engineering	16



## Photovoltaic electric heating element

### Screw-in electric heating element type EP 3.5 bis EP 9.0

Screw-in electric heating element EP: The electric heating element consists of three U-shaped round heating rods, which are mounted in a conical brass nipple 1½" insulated by means of food-safe plastic sleeves. Thanks to the insulated installation of the round heating elements, the devices are also suitable for enamelled storage tanks. The unheated zone is 150 mm for all outputs.

### Flange-mounted electric heating element type EFHK-E/C 3.5 bis 9.0

Flange-mounted electric heating element EFHK: The electric heating element consists of three U-shaped round heating rods, each pressed into a press nipple. These are screwed with the immersion sleeve onto a steel flange. A food-safe plastic disc serves as insulation. The unheated zone is 70 mm for all outputs.

### RemoteControl

The PV electric heating elements (screw-in/flange) are supplied with a control unit, the RC (RemoteControl) casing.

All control signals and optional temperature sensors are connected to this control unit. The display shows the status of the PV electric heating element. Heat output, IP address, the heating status or any error messages can be displayed if required. The control unit is connected to the PV electric heating element, a 2.8 m long connection cable is included in the scope of delivery.

### Application


- As supplementary heating of service and heating water in photovoltaic systems.
- For optimisation of the internal consumption of PV energy.
- To minimise the switch-ons/cycles of the main heat generator e.g. exclusively hot water production in summer.

### Features

- TR: Electromechanical temperature controller according to EN 14597, not unbreakable.
- STB: Electromechanical temperature limiter according to EN 14597, unbreakable, if the excess temperature is exceeded, the switch-gear switches OFF and remains locked in this position. Unlocking is done manually after the sensor tube has cooled down by approx. 10 K.
  - Time constant of the sensor tube according to EN 14597
  - Mode of operation TR type 2 B according to EN 14597
  - Mode of operation STB type 2 BK according to EN 14597

### On site

Observe the position and installation of the electric heating element in the buffer storage tank/storage tank with heating coil, if necessary according to the schematic diagram and/or structural conditions.

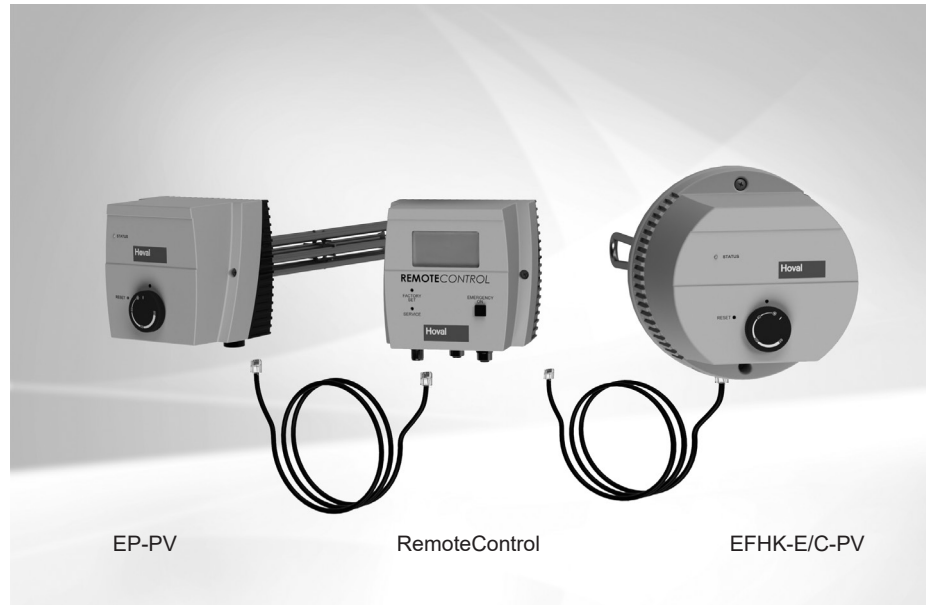

Range type	Output kW	Installation length mm
------------	-----------	------------------------

### Photovoltaic screw-in electric heating element for enamelled calorifiers and stainless steel calorifiers

EP-3.5-1½"-PV	3.5	600
EP-4.4-1½"-PV	4.4	700
EP-5.2-1½"-PV	5.2	750
EP-7.5-1½"-PV	7.5	700
EP-9.0-1½"-PV	9.0	750

### Photovoltaic flange-mounted electric heating element for enamelled calorifiers, stainless steel calorifiers and buffer storage tanks

EFHK-E/C-3.5-180-PV	3.5	360
EFHK-E/C-4.4-180-PV	4.4	420
EFHK-E/C-5.8-180-PV	5.8	540
EFHK-E/C-7.5-180-PV	7.5	420
EFHK-E/C-9.0-180-PV	9.0	490

### Connections

The screw-in electric heating element is equipped with 2 connection sockets. The flange-mounted electric heating element is equipped with 2 connection sockets. All necessary plugs are included in the scope of delivery. After initial connection or commissioning by a qualified electrician, the device can be completely disconnected from the mains and the connection to the control unit by pulling out the plugs.

### Function modes

#### Analog modes (0-10 V control signal)

The electric heating element can be controlled with a 0-10 V signal in 3 or 7 power levels (depending on the model).

7-stage: From a voltage of 1.25 V, the device switches to the first heating stage. Each additional stage requires a voltage increase of 1.25 V.

From a voltage of 8.75 V, the device switches to the seventh heating stage. To avoid flickering, a hysteresis of 0.25 V is programmed in. 3-stage: The electric heating element can be controlled with a 0-10 V signal in the 3 power levels. To avoid flickering, a hysteresis of 0.25 V is programmed in.

### Modbus TCP

In this function, the device obtains an IP address via a local DHCP server (router). After the electric heating element has been integrated into the network, it can be controlled in 3 and 7 power levels (depending on the model) and the temperature of the sensors can be read out. The power levels can be controlled via a value 0-7 or 0-3 or via a reference value specification (here the electric heating element independently selects the suitable power level).

### Legionella protection

The automatic legionella protection automatically heats the system to min. 65 °C daily/weekly or fortnightly. If the temperature of 65 °C is reached within the interval, regardless of the legionella protection program, the interval timer starts over from this point.

The parameters can be configured via Modbus or MQTT.

#### **Request contact of the main heat generator**

If a heat pump is available, the device can be used as a supplementary heater. The heat pump is controlled via a digital input, which activates the full heating output.

#### **Emergency mode “Emergency On”**

The “Emergency On” button can be used to switch on the maximum heating power immediately. This may be necessary in the event of a failure or if additional heat is required. To switch off, press the button again. The temperature is digitally limited to 60 °C in this mode. For safety reasons, the electric heating element automatically switches back to normal operation after 24 hours.

#### **Corrosion protection**

Please note: This electric heating element can be used for stainless steel storage tanks as well as for black steel/enamelled storage tanks.

For the installation of an electric heating element in a black steel or black steel enamelled storage tank, the red slide switch (DIP switch) must be left in the “black steel storage tank” position (factory setting). When the electric heating element is installed in a stainless steel storage tank, the slide switch (DIP switch) must be set to the “stainless steel storage tank” position.

#### **Web interface**

- Setting setpoint temperatures for minimum temperature, request temperature, legionella protection temperatures, low-tariff temperature
- Reading out the control signals
- Reading out actual temperatures
- Reading out operating hours
- Setting up the Modbus configuration or direct communication with SMA or SENE

Photovoltaic electric heating elements



**Photovoltaic screw-in electric heating element**

for enamelled calorifiers and stainless steel calorifiers

- Incoloy® alloy 825 heating rods
- Brass nipple R 1½"
- LAN, Modbus TCP, 0-10 V DC
- Medium: DHW and heating water
- Voltage: 3 x 400 V
- Unheated zone: 150 mm
- Setting range: 0 ... 60 ... 85 °C
- Safety temperature limiter: 110 °C
- Protection class: IP41
- Casing: 126 x 135 mm
- Max. operating pressure: 10 bar
- Delivered separately, installation on site
- Not suitable for exclusively electric heating (risk of limescale buildup).

EP type	Heat output 3 x 400 V kW	Output levels kW	Installation length mm
3.5-1½"-PV	3.5	7 x 0.50	600
4.4-1½"-PV	4.4	7 x 0.65	700
5.2-1½"-PV	5.2	7 x 0.75	750
7.5-1½"-PV	7.5	3 x 2.50	700
9.0-1½"-PV	9.0	3 x 3.00	750

Part No.

6063 629  
6063 630  
6063 631  
6063 632  
6063 633



**Photovoltaic flange-mounted electric heating element**

for enamelled calorifiers, stainless steel calorifiers and buffer storage tanks

- Incoloy® alloy 825 heating rods
- Ø 180 mm flange
- LAN, Modbus TCP, 0-10 V DC
- Medium: DHW and heating water
- Voltage: 3 x 400 V
- Unheated zone: 70 mm
- Setting range: 0 ... 60 ... 85 °C
- Safety temperature limiter: 110 °C
- Protection class: IP21
- Casing: Ø 186 mm
- Max. operating pressure: 10 bar
- Delivered separately, installation on site
- Not suitable for exclusively electric heating (risk of limescale buildup).

EFHK-E/C type	Heat output 3 x 400 V kW	Output levels kW	Installation length mm
3.5-180-PV	3.5	7 x 0.50	360
4.4-180-PV	4.4	7 x 0.65	420
5.8-180-PV	5.8	7 x 0.83	540
7.5-180-PV	7.5	3 x 2.50	420
9.0-180-PV	9.0	3 x 3.00	490

6063 624  
6063 625  
6063 626  
6063 627  
6063 628



**Flange adapter set Ø 257-180**

Adapter for reduction of the flange diameter from 257 to 180 mm. Complete incl. seal and screws


6063 634

Photovoltaic electric heating element

		Photovoltaic screw-in electric heating element	Photovoltaic flange-mounted electric heating element
Temperature setting range	°C	28 ... 85	28 ... 85
Switch-off temperature	°C	110	110
Ambient temperature at the switchgear	°C	max. 50	max. 50
Thermal switching difference	K	11.0 ± 5.5	11.0 ± 5.5
Ambient temperature during storage and transport	°C	-30 ... 90	-30 ... 90
Flange/thread size		R 1½" (conical)	Outside Ø 180 mm, pitch circle Ø 150 mm, 8 x M12
Flange/thread connection material		Brass (CuZn40Pb2)	Black steel (St 37/1.0038, painted) Seal: EPDM (KTW approval)
Round heating rods		Incoloy® alloy 825, 2.4858	Incoloy® alloy 825, 2.4858
Surface load	W/cm²	8-9	7
Electrical connection		Connector plug with screw contacts	Connector plug with screw contacts
Operating pressure	bar	Max. 10	Max. 10
Casing top part		Polycarbonate, RAL 7035 (light grey)	Polycarbonate, RAL 7035 (light grey)
Casing bottom part		Polycarbonate, RAL 7016 (anthracite grey)	Polycarbonate, RAL 7016 (anthracite grey)
Type of protection		IP41	IP21
Dimensions		See dimensional drawing	See dimensional drawing

Photovoltaic screw-in electric heating element


1. Screw-in electric heating element with insulated installation of the round heating rods which are suitable for enamelled as well as black steel calorifiers and, thanks to DIP switch, also for stainless steel calorifiers
2. Standard hexagon profile for secure tightening with 60 mm open-end spanner
3. Conical thread for precise casing position and tight mounting (1½" standard)
4. Surface load 8-9 W/cm², suitable for heating water
5. Optimum sensor position in the oval immersion tube for identical temperature detection of safety temperature limiter and temperature controller

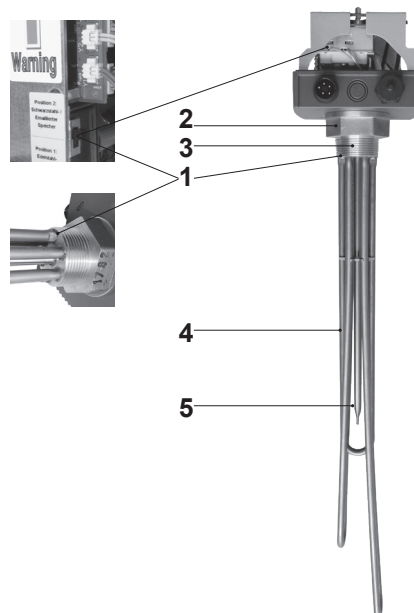



Illustrations without cover

Photovoltaic flange-mounted electric heating element

1. Standard flange outside Ø 180 mm, suitable for enamelled as well as black steel calorifiers and, thanks to DIP switch, also for stainless steel calorifiers
2. Delivery incl. flat seal (included separately)
3. Deep surface load 7 W/cm², for lower limescale buildup
4. Optimum sensor position
5. Insulated mounting of the heating rods for reduced corrosion

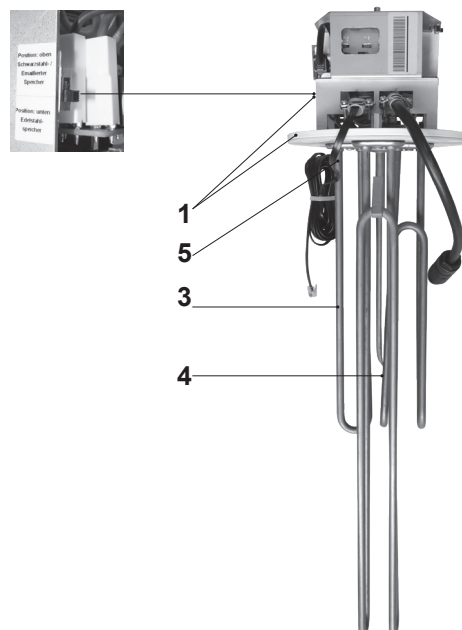

Connection plugs photovoltaic flange-mounted electric heating element EP-3.5 to EP-5.2

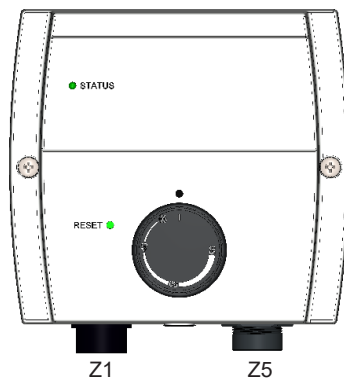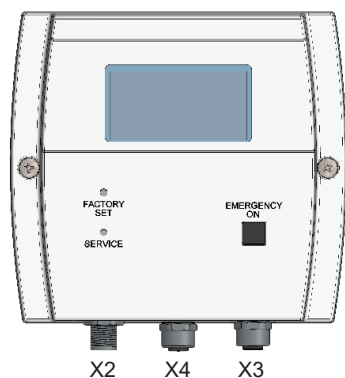

RemoteControl control unit

- X1 – RJ12 connection socket**  
Interface to screw-in electric heating element
- X2 – M12 socket for control signals**  
Switch-on signal of the heat pump  
Analogue signal 0-10 V  
Power station block (digital input)  
Output signal (5 V DC) for circulating pump
- X3 – M12 plug for temperature sensor**  
Connection options for optional content sensors 1 to 4
- X4 – M12 plug RS485 interface**  
Modbus RTU communication via RS485 interface
- X5 – RJ45 connection socket**  
Network connection via LAN connection



Screw-in electric heating element

- Z1 – mains supply**  
For power supply to the heating elements and internal circuit board
- Z5 – RJ12 connection socket**  
Interface to RemoteControl control unit

Supplied plugs/connecting cable

- Z1 – power supply heating element**  
Wieland RST 5-pin plug, IP66  
load capacity: 250/400 V 16 A  
screw connections max. 2.5 mm<sup>2</sup>  
(up to 1.5 mm<sup>2</sup> end ferrules can be used)
- Z5/X1 – communication**  
Pluggable RJ12 communication cable 2.9 m
- X2: Round plug connector M12 (socket)**  
8-pin (A-coded) with screw contacts, IP68  
connection size:  
0.14-0.5 mm<sup>2</sup>/AWG 26-20
- X2: Round plug connector M12 (plug)**  
3-pin (A-coded) with screw contacts, IP68  
connection size:  
0.14-0.5 mm<sup>2</sup>/AWG 26-20
- X4: Round plug connector M12 (plug)**  
8-pin (A-coded) with screw contacts, IP68  
connection size:  
0.14-0.5 mm<sup>2</sup>/AWG 26-20

Connection plugs photovoltaic screw-in electric heating element  
EP-7.5 to EP-9.0

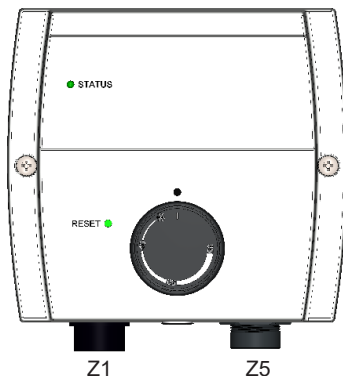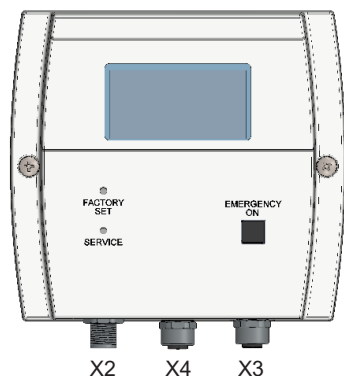

RemoteControl control unit

**X1 – RJ12 connection socket**

Interface to screw-in electric heating element

**X2 – M12 socket for control signals**

Switch-on signal of the heat pump  
Analogue signal 0-10 V  
Power station block (digital input)  
Output signal (5 V DC) for circulating pump

**X3 – M12 plug for temperature sensor**

Connection options for optional content sensors 1 to 4

**X4 – M12 plug RS485 interface**

Modbus RTU communication via RS485 interface

**X5 – RJ45 connection socket**

Network connection via LAN connection

Screw-in electric heating element

**Z1 – mains supply**

For power supply to the heating elements and internal circuit board

**Z5 – RJ12 connection socket**

Interface to RemoteControl control unit

Supplied plugs/connecting cable

**Z1 – power supply heating element**

Wieland RST mini 1615,  
5-pin plug with 2 m cable 2.5 mm<sup>2</sup>  
Capacity: 250/400 V 16 A

**Z5/X1 – communication**


Pluggable RJ12 communication cable 2.9 m

**X2:** Round plug connector M12 (socket)  
8-pin (A-coded) with screw contacts, IP68  
connection size:  
0.14-0.5 mm<sup>2</sup>/AWG 26-20

**X2:** Round plug connector M12 (plug)  
3-pin (A-coded) with screw contacts, IP68  
connection size:  
0.14-0.5 mm<sup>2</sup>/AWG 26-20

**X4:** Round plug connector M12 (plug)  
8-pin (A-coded) with screw contacts, IP68  
connection size:  
0.14-0.5 mm<sup>2</sup>/AWG 26-20

Connection plugs photovoltaic flange-mounted electric heating element EFHK-3.5 to EFHK-5.8

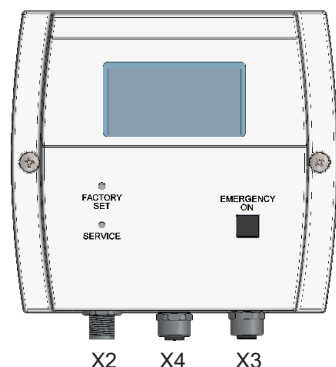

RemoteControl control unit

**X1 – RJ12 connection socket**

Interface to flange-mounted electric heating element

**X2 – M12 socket for control signals**

Switch-on signal of the heat pump  
Analogue signal 0-10 V  
Power station block (digital input)  
Output signal (5 V DC) for circulating pump

**X3 – M12 plug for temperature sensor**

Connection options for optional content sensors 1 to 4

**X4 – M12 plug RS485 interface**

Modbus RTU communication via RS485 interface

**X5 – RJ45 connection socket**

Network connection via LAN connection

Flange-mounted electric heating element

**Z1 – mains supply**

For power supply to the heating elements and internal circuit board

**Z5 – RJ12 connection socket**

Interface to RemoteControl control unit

Supplied plugs/connecting cable

**Z1 – power supply heating element**

Wieland RST 5-pin plug, IP66 load capacity: 250/400 V 16 A screw connections max. 2.5 mm<sup>2</sup> (up to 1.5 mm<sup>2</sup> end ferrules can be used)

**Z5/X1 – communication**


Pluggable RJ12 communication cable 2.9 m

**X2:** Round plug connector M12 (socket) 8-pin (A-coded) with screw contacts, IP68 connection size: 0.14-0.5 mm<sup>2</sup>/AWG 26-20

**X2:** Round plug connector M12 (plug) 3-pin (A-coded) with screw contacts, IP68 connection size: 0.14-0.5 mm<sup>2</sup>/AWG 26-20

**X4:** Round plug connector M12 (plug) 8-pin (A-coded) with screw contacts, IP68 connection size: 0.14-0.5 mm<sup>2</sup>/AWG 26-20

Connection plugs photovoltaic flange-mounted electric heating element EFHK-7.5 and EFHK-9.0

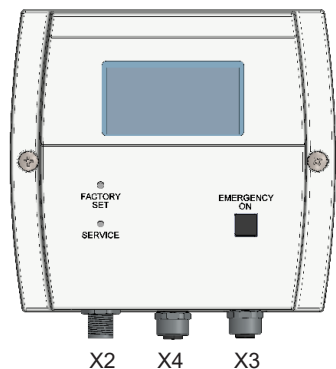

RemoteControl control unit

**X1 – RJ12 connection socket**

Interface to flange-mounted electric heating element

**X2 – M12 socket for control signals**

Switch-on signal of the heat pump  
Analogue signal 0-10 V  
Power station block (digital input)  
Output signal (5 V DC) for circulating pump

**X3 – M12 plug for temperature sensor**

Connection options for optional content sensors 1 to 4

**X4 – M12 plug RS485 interface**

Modbus RTU communication via RS485 interface

**X5 – RJ45 connection socket**

Network connection via LAN connection

Flange-mounted electric heating element

**Z1 – mains supply**

Zur Energieversorgung der Heizelemente und internen Platine

**Z5 – RJ12 connection socket**

Interface to RemoteControl control unit

Supplied plugs/connecting cable

**Z1 – power supply heating element**

Wieland RST mini 1615,  
5-pin plug with 2 m cable 2.5 mm<sup>2</sup>  
Capacity: 250/400 V 16 A

**Z5/X1 – communication**


Pluggable RJ12 communication cable 2.9 m

**X2:** Round plug connector M12 (socket)  
8-pin (A-coded) with screw contacts, IP68  
connection size:  
0.14-0.5 mm<sup>2</sup>/AWG 26-20

**X2:** Round plug connector M12 (plug)  
3-pin (A-coded) with screw contacts, IP68  
connection size:  
0.14-0.5 mm<sup>2</sup>/AWG 26-20

**X4:** Round plug connector M12 (plug)  
8-pin (A-coded) with screw contacts, IP68  
connection size:  
0.14-0.5 mm<sup>2</sup>/AWG 26-20


Connection diagrams EP-3.5 and EFHK-3.5

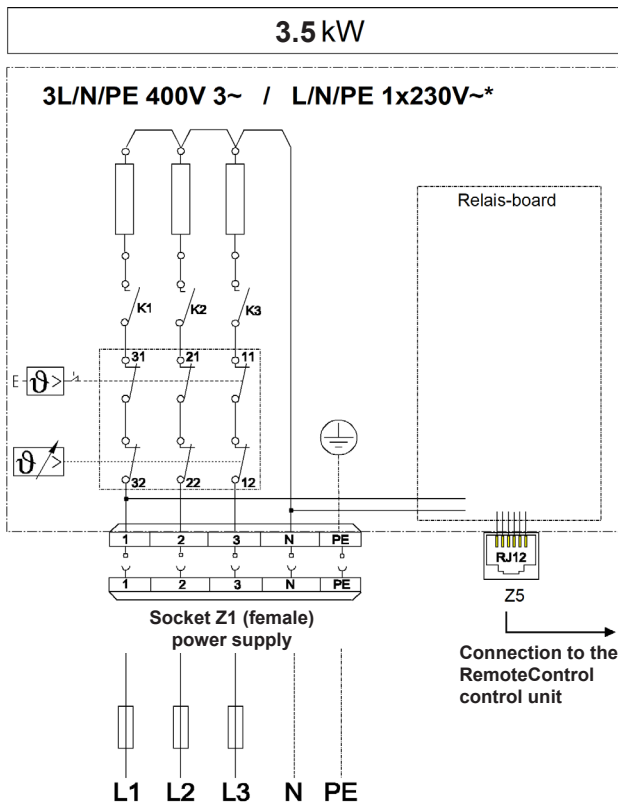


No external switching device (e.g. contactor or relay) is required, the heating element is switched exclusively via the integrated interfaces (e.g. Modbus, 0-10 V, switching contact, etc.).

Heat Pump request = Potential-free request contact of the main heat generator

Connection diagrams EP-4.4 to EP-5.2 and EFHK-4.4 to EFHK-5.8

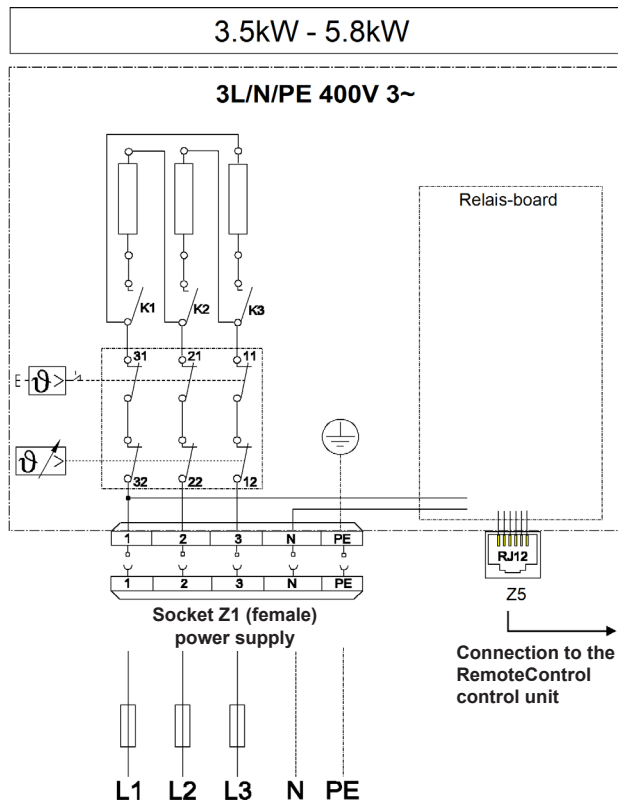


Connection diagrams EP-7.5 to EP-9.0 and EFHK-7.5 to EFHK-9.0

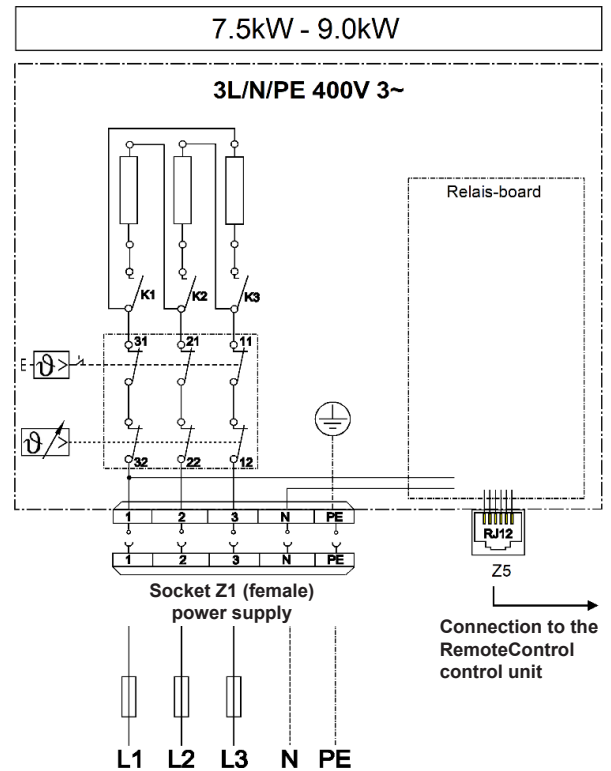

Input assignment of plug connections


**Connector X2-signal inputs**

- Connection 1: GND
- Connection 2: Analogue Input 0-10 V
- Connection 3: EW lock
- Connection 4: Relay K5 (5 V DC)
- Connection 5: GND
- Connection 6: Heatpump request
- Connection 7: GND
- Connection 8: 5 V DC out

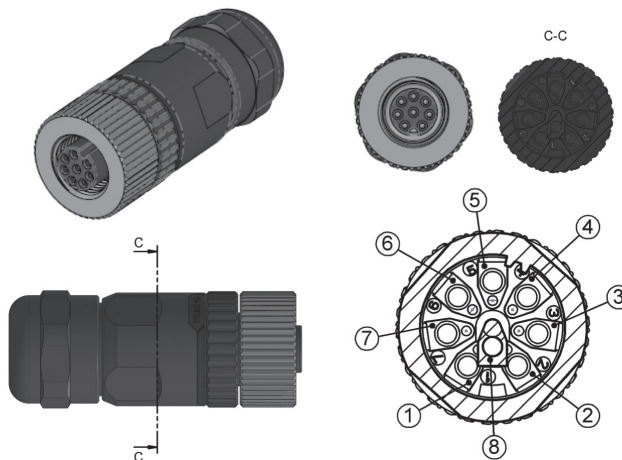


**Connector X3-additional sensors**

- Connection 1: GND
- Connection 2: Sensor 1
- Connection 3: GND
- Connection 4: Sensor 2
- Connection 5: GND
- Connection 6: Sensor 3
- Connection 7: GND
- Connection 8: Sensor 4


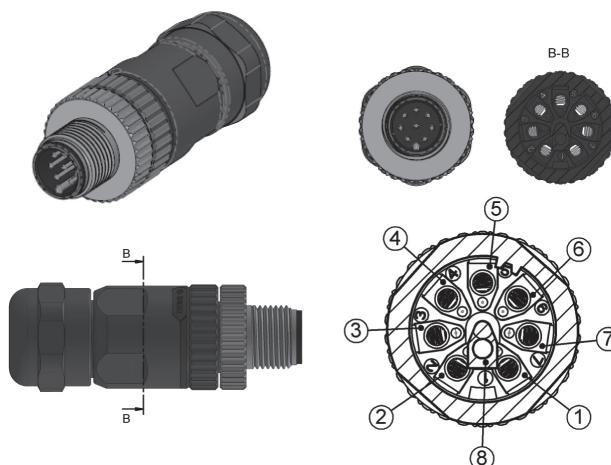


**Connector Modbus RTU RS485**

- Connection 1: GND
- Connection 3: RS485 B
- Connection 4: RS485 A

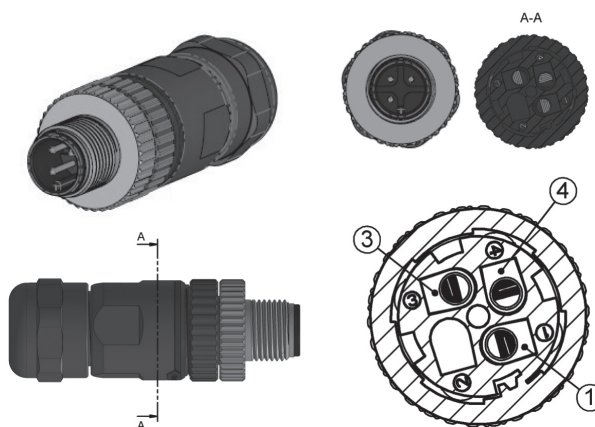


**Photovoltaic screw-in electric heating element**  
(Dimensions in mm)

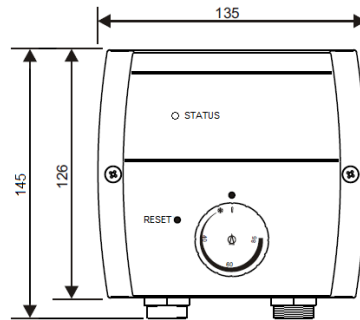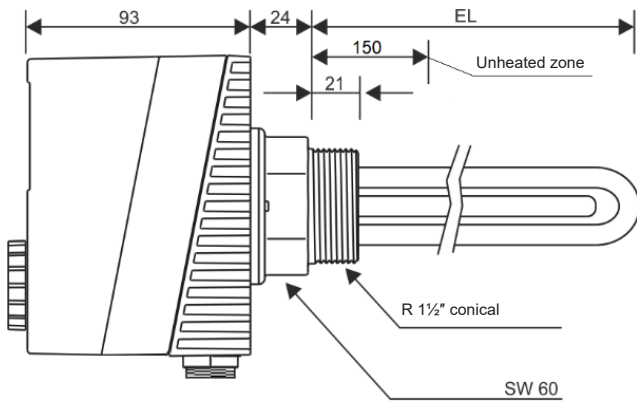


Installation length =	EL
EP-3.5-1½"-PV	600
EP-4.4-1½"-PV	700
EP-5.2-1½"-PV	750
EP-7.5-1½"-PV	700
EP-9.0-1½"-PV	750


**Photovoltaic flange-mounted electric heating element**  
(Dimensions in mm)

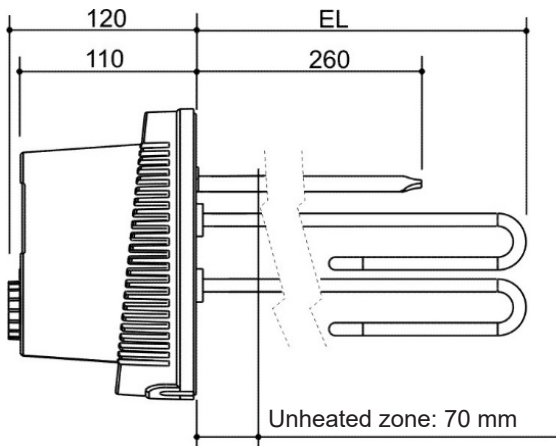

Casing diameter:  $\varnothing = 186$



Pitch circle diameter:  $\varnothing = 150$

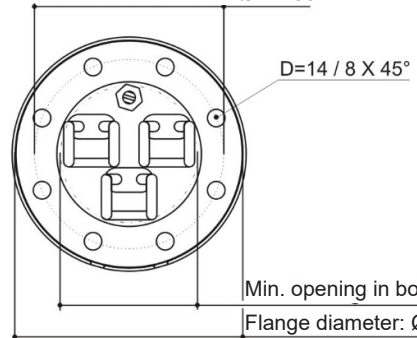

Installation length =	EL
EFHK-E/C-3.5-180-PV	360
EFHK-E/C-4.4-180-PV	420
EFHK-E/C-5.8-180-PV	540
EFHK-E/C-7.5-180-PV	420
EFHK-E/C-9.0-180-PV	490

Calorifier/storage tank	Photovoltaic screw-in electric heating element					Photovoltaic flange-mounted electric heating element													
	EP-3.5-PV 3.5 kW	EP-4.4-PV 4.4 kW	EP-5.2-PV 5.2 kW	EP-7.5-PV 7.5 kW	EP-9.0-PV 9.0 kW	EFHK- E/C-3.5- 180-PV 3.5 kW	EFHK- E/C-4.4- 180-PV 4.4 kW	EFHK- E/C-5.8- 180-PV 5.8 kW	EFHK- E/C-7.5- 180-PV 7.5 kW	EFHK- E/C-9.0- 180-PV 9.0 kW									
Installation type	Sleeve 1½"					Flange Ø 180													
Installation position						t	b	t	b	t	b	t	b	t	b				
<b>Stainless steel calorifier</b>																			
<i>CombiVal C</i>																			
CombiVal C (300)							•		•										
CombiVal C (400)							•		•		•		•		•				
CombiVal C (500)							•		•		•		•		•				
CombiVal C (750)							•		•		•		•		•				
CombiVal C (1000)							•		•		•		•		•				
CombiVal C (1500)						•	•	•	•	•	•	•	•	•	•				
CombiVal C (2000)						•	•	•	•	•	•	•	•	•	•				
CombiVal C (2500)							•*		•*		•*		•*		•*				
<i>CombiVal CR</i>																			
CombiVal CR (200)							•		•		•		•		•				
CombiVal CR (300)							•		•				•		•				
CombiVal CR (500)	•						•		•		•		•		•				
CombiVal CR (800)						•	•	•	•	•	•	•	•	•	•				
CombiVal CR (1000)						•	•	•	•	•	•	•	•	•	•				
<i>CombiVal CSR</i>																			
CombiVal CSR (300)							•		•										
CombiVal CSR (400)	•						•		•		•		•		•				
CombiVal CSR (500)	•						•		•		•		•		•				
CombiVal CSR (800)						•	•	•	•	•	•	•	•	•	•				
CombiVal CSR (1000)						•	•	•	•	•	•	•	•	•	•				
CombiVal CSR (1250)						•	•	•	•	•	•	•	•	•	•				
CombiVal CSR (1500)						•	•	•	•	•	•	•	•	•	•				
CombiVal CSR (2000)						•	•	•	•	•	•	•	•	•	•				
<b>Enamelled calorifier</b>																			
<i>CombiVal E</i>																			
CombiVal E (300)							•		•										
CombiVal E (500)							•		•		•		•		•				
CombiVal E (800)							•		•		•		•		•				
CombiVal E (1000)							•		•		•		•		•				
CombiVal E (1500)						•	•	•	•	•	•	•	•	•	•				
CombiVal E (2000)						•	•	•	•	•	•	•	•	•	•				
<i>CombiVal ER</i>																			
CombiVal ER (200)							•												
CombiVal ERW (200)							•												
CombiVal ER (300)							•		•										
CombiVal ER (400)							•		•										
CombiVal ER (500)							•		•										
CombiVal ER (800)						•	•	•	•	•	•	•	•	•	•				
CombiVal ER (1000)						•	•	•	•	•	•	•	•	•	•				
<i>CombiVal ESR</i>																			
CombiVal ESR (200)							•												
CombiVal ESR (300)							•		•										
CombiVal ESR (400)							•		•										
<i>CombiVal ESSR</i>																			
CombiVal ESSR (500)	•						•		•										
CombiVal ESSR (800)						•	•	•	•	•	•	•	•	•	•				
CombiVal ESSR (1000)						•	•	•	•	•	•	•	•	•	•				
<i>MultiVal ERR</i>																			
MultiVal ERR (300)							•												
MultiVal ERR (400)	•						•		•										
MultiVal ERR (500)	•						•		•				•		•				
<i>MultiVal ESRR</i>																			
MultiVal ESRR (500)							•		•				•		•				
MultiVal ESRR (800)						•	•	•	•	•	•	•	•	•	•				
MultiVal ESRR (1000)						•	•	•	•	•	•	•	•	•	•				
<i>CombiVal WPEF</i>																			
CombiVal WPEF (300)							•		•										

\* On-site delivery of an adapter flange for the installation of the flange-mounted electric heating element

Calorifier/storage tank	Photovoltaic screw-in electric heating element					Photovoltaic flange-mounted electric heating element														
	EP-3.5-PV 3.5 kW	EP-4.4-PV 4.4 kW	EP-5.2-PV 5.2 kW	EP-7.5-PV 7.5 kW	EP-9.0-PV 9.0 kW	EFHK- E/C-3.5- 180-PV 3.5 kW	EFHK- E/C-4.4- 180-PV 4.4 kW	EFHK- E/C-5.8- 180-PV 5.8 kW	EFHK- E/C-7.5- 180-PV 7.5 kW	EFHK- E/C-9.0- 180-PV 9.0 kW										
Installation type	Sleeve 1½"										Flange Ø 180									
Installation position	t	b	t	b	t	b	t	b	t	b	t	b	t	b	t	b	t	b	t	b
<b>Buffer storage tank</b>																				
<i>EnerVal</i>																				
EnerVal (200)																				
EnerVal (300)																				
EnerVal (500)	•	•																		
EnerVal (800)	•	•	•	•	•	•	•	•	•	•										
EnerVal (1000)	•	•	•	•	•	•	•	•	•	•										
EnerVal (1500)	•	•	•	•	•	•	•	•	•	•										
EnerVal (2000)	•	•	•	•	•	•	•	•	•	•										
<i>EnerVal G</i>																				
EnerVal G (800)											•	•	•	•	•	•	•	•	•	•
EnerVal G (1000)											•	•	•	•	•	•	•	•	•	•
EnerVal G (1500)																	•*	•*	•*	•*
EnerVal G (2000)																	•*	•*	•*	•*
EnerVal G (2500)																	•*	•*	•*	•*
EnerVal G (4000)																	•*	•*	•*	•*
EnerVal G (6000)																	•*	•*	•*	•*
<i>EnerVal G cool</i>																				
EnerVal G cool (800)	•		•		•		•		•											
EnerVal G cool (1000)	•		•		•		•		•											
EnerVal G cool (1500)	•		•		•		•		•											
EnerVal G cool (2500)	•		•		•		•		•											
EnerVal G cool (4000)	•		•		•		•		•											
EnerVal G cool (6000)	•		•		•		•		•											
<b>Stratified storage tank/stratified combination storage tank</b>																				
<i>VarioVal FLS/Rxx</i>																				
VarioVal FLS (800)	•		•		•		•		•											
VarioVal FLS (1000)	•		•		•		•		•											
VarioVal RHS (800)	•																			
VarioVal RHS (1000)	•																			
VarioVal RL (600)	•		•					•												
VarioVal RLS (800)	•		•					•												
VarioVal RLS (1000)	•		•					•												

\* Must be ordered with flange adapter

Legend:  
t: top, b: bottom

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk

### Instructions and guidelines

The following instructions and guidelines have to be observed:


- technical data and mounting instructions of Hoval
- hydraulic regulations and those pertaining to instrumentation and control of Hoval
- instructions of the local fire police as well as country specific instructions
- instructions of the power station (concerning heat input of the electric heating element)
- fire protection instructions
- VDI 2035 Prevention of damage from corrosion and stone formation in hot water plants
- VDE 0100
- instructions concerning operating pressure and operating temperature
- DIN 4708 Central domestic hot water systems, page 1-3

### Plumbing

- For electrical heating a hot water distribution system without circulation is to be planned if possible.
- Maximum safety adjustment: 1 bar less than the maximum operating pressure
- Please select the material of the connection components (pipes, sealing, safety valve,...) so that it can't get damaged by excessive temperatures caused by a malfunction of the temperature control circuit.

### Assembly of the heating system


- The calorifier or additional heater coils must be provided with charging pump.
- An automatic deaerator must be installed at the highest point in the heating water flow.
- Flow and return pipes are to be attached in such way that with turned off charging pump and during electrical heating no back circulation and force of gravity circulation can occur.
- Expansion of heating water must be always ensured (also during electric charging resp. heat pump operation).

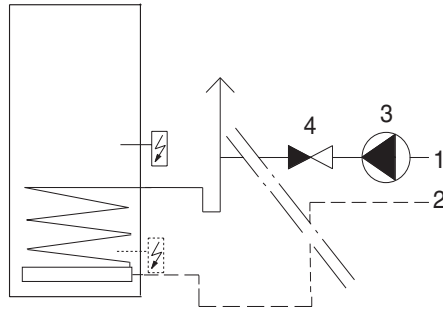

- 1 Flow
- 2 Return
- 3 Charging pump
- 4 Non-return valve

### Necessary space

- The inspection opening has to be well accessible.
- Distance to the wall for the installation and removal of the electric heating element (a)




Calorifier	Type	a
CombiVal ER/ESR/ESSR	200-500	≥ 600
CombiVal ER/ESSR	800-1000	≥ 950
CombiVal CR	200-500	≥ 750
CombiVal CR	800-2000	≥ 950
CombiVal CSR	300-500	≥ 750
CombiVal CSR	800-1000	≥ 950
DuoVal E/C	100-300	≥ 600


#### Notice on request contact:

When the main heat generator is requested via the "Heat Pump Request" switch contact, note that the PV heating rods are programmed with only 55 °C as the standard request temperature in the factory setting. The parameter must be adapted to the specific system in the web interface.

### Calorifier with one coil

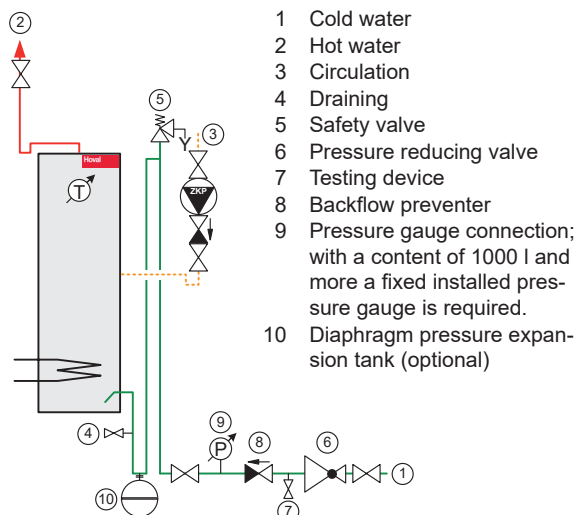

### Calorifier with two coils (incl. solar)

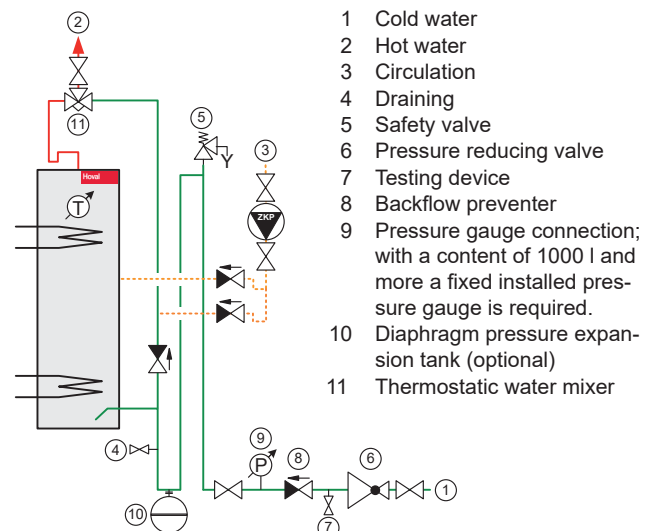

**Reading examples for the design of the storage tank size**

Domestic hot water temperature 45 °C

**1) Comfort design**

Calculation with simultaneity factor according to **DIN 4708**

- ① Performance figure NL = 23
- ② Heating flow T = 60 °C  
▶ CombiVal CSR (500)
- ③ Heating flow T = 70 °C  
▶ CombiVal CSR (400)
- ④ Heating flow T = 80 °C  
▶ CombiVal CSR (300)

**2) Standard design**

Calculation with simultaneity factor according to **Dresden Technical University**

- ① Performance figure NL = 23
- ⑤ Heating flow T = 60 °C  
▶ CombiVal CSR (400)
- ⑥ Heating flow T = 70 °C  
▶ CombiVal CSR (300)
- ⑦ Heating flow T = 80 °C  
▶ CombiVal CSR (300)


T >	Comfort <sup>1)</sup>			Standard <sup>2)</sup>		
	60 °C	70 °C	80 °C	60 °C	70 °C	80 °C
NL √	②	③	④	⑤	⑥	⑦
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						
13	300					
14						
15				300		
16						
17						
18						
19						
20						
21	400	300				
22						
23 ①	→	→	→	→	→	→
24						
25						
26				400	300	
27						
28						
29						
30	500	400	300			
31						
32						
33						
34						
35						
36						
37						300
38				500	400	

### Calculation of the continuous domestic hot water output for Hoval CombiVal CSR (500)

#### Reading example 2: domestic hot water output at 60 °C with flow temperature 70 °C

- ① Assumption of the charging flow rate 2 m<sup>3</sup>/h
- ② Intersection with curve  $T_{\text{heating flow}} = 70\text{ °C}$
- ③ ► Continuous output of approx. 1150 l/h
- ④ ► Heat output of approx. 66 kW without boiler supplement
- ⑤ Read the spread between flow and return, approx. 28 K, i.e. return flow is at approx. 42 °C)

#### Domestic hot water 60 °C

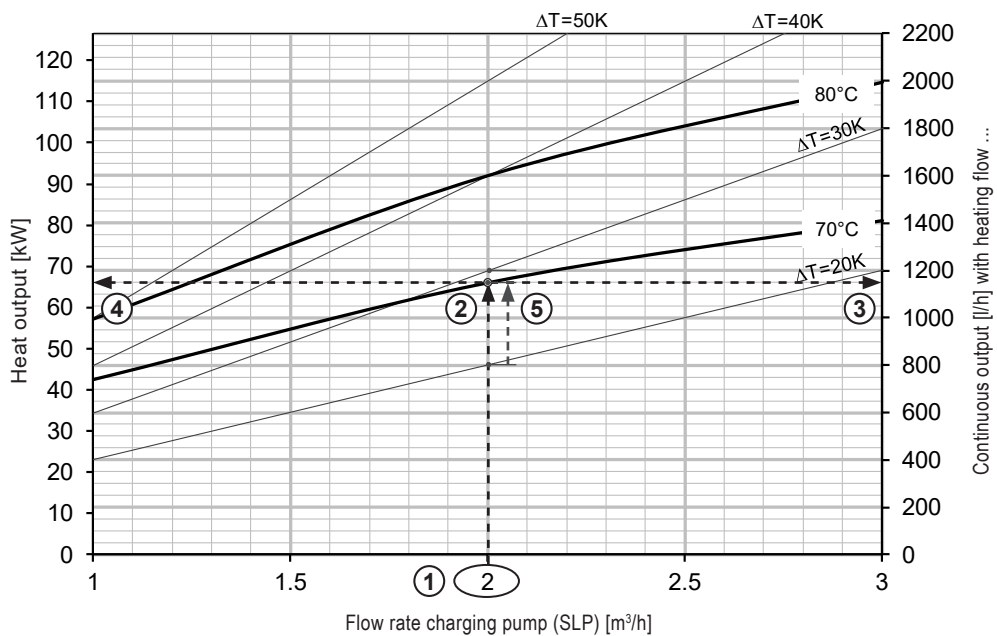

**Reading example Comfort**

for Hoval CombiVal CSR (400)




N number = 23 = 650 l/10 min 45 °C

Heating flow T = 70 °C

Cold water inlet 10 °C

**10 min peak output/N number with domestic hot water 45 °C**

according to DIN 4708 (Comfort) and Dresden Technical University (Standard)

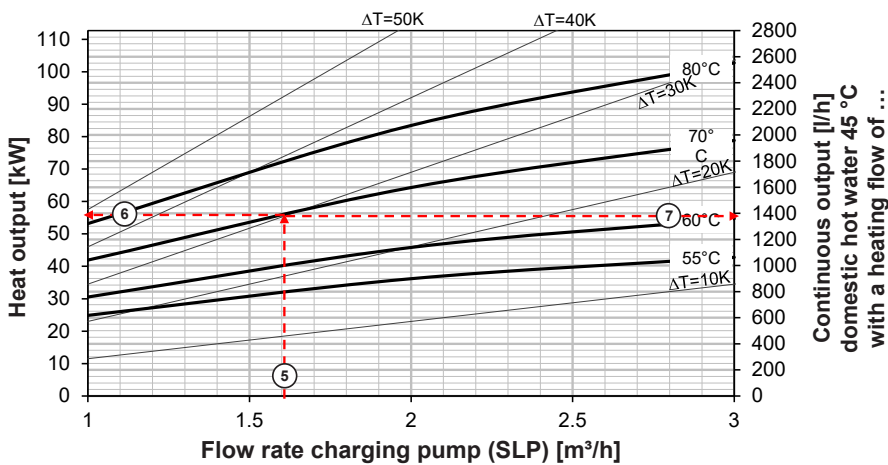
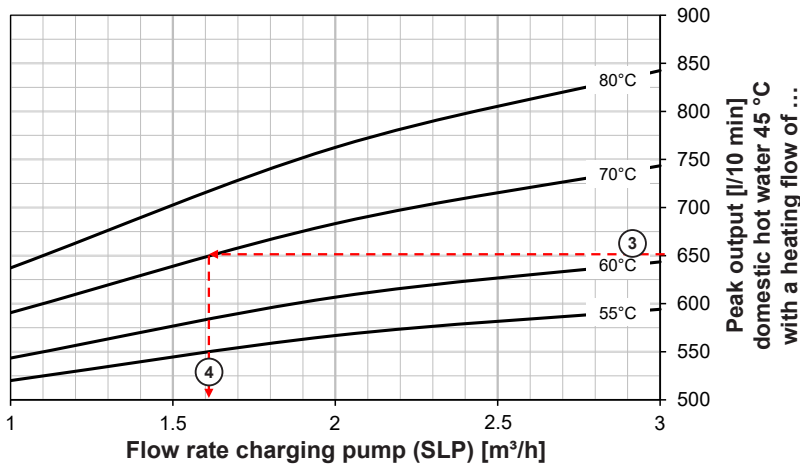
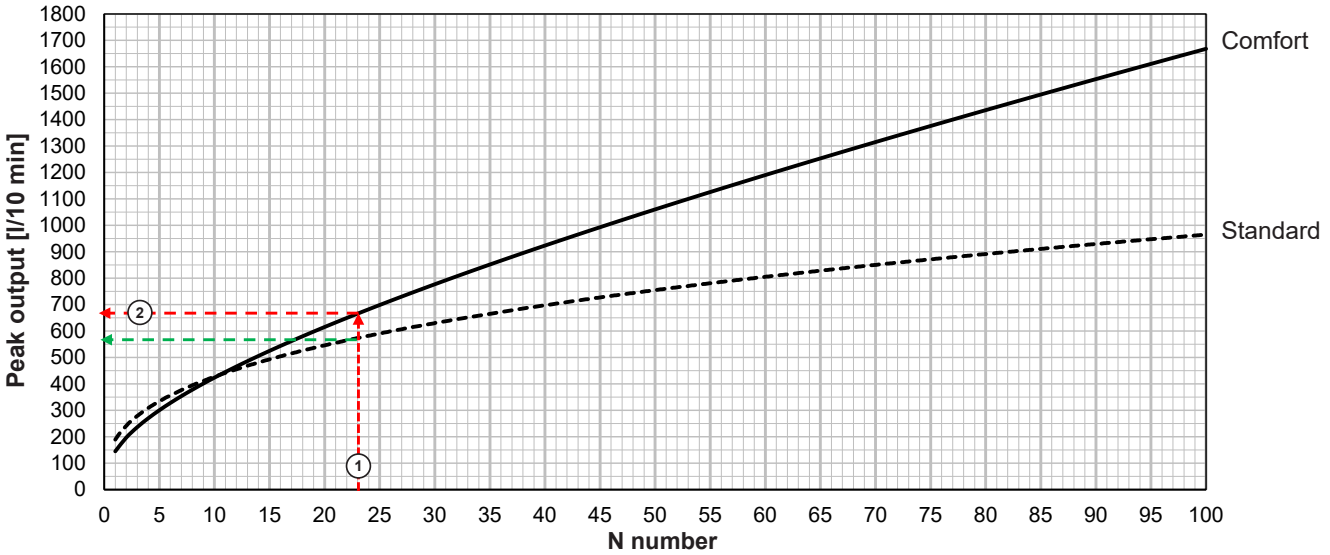


- |  |   |
|--|---|
| ① Transfer performance figure NL 23 to curve sheet                               | ④ Read off flow rate charging pump (SLP) on curve sheet                 |
| ② Read off peak output [l/10 min] from Comfort curve in the curve sheet          | ⑤ Transfer flow rate charging pump to curve sheet intersection FL 70 °C |
| ③ Transfer peak output [l/10 min] to the curve sheet up to intersection FL 70 °C | ⑥ Read off heat output  |
|  | ⑦ Read off continuous output [l/h]                                      |

**Reading example Standard**

for Hoval CombiVal CSR (300)  
N number = 23 = 555 l/10 min 45 °C  
Heating flow T = 70 °C  
Cold water inlet 10 °C

**10 min peak output/N number with domestic hot water 45 °C**  
according to DIN 4708 (Comfort) and Dresden Technical University (Standard)

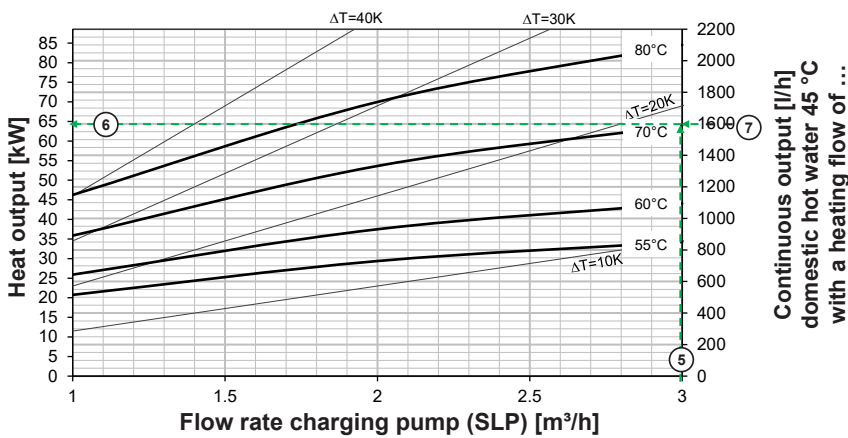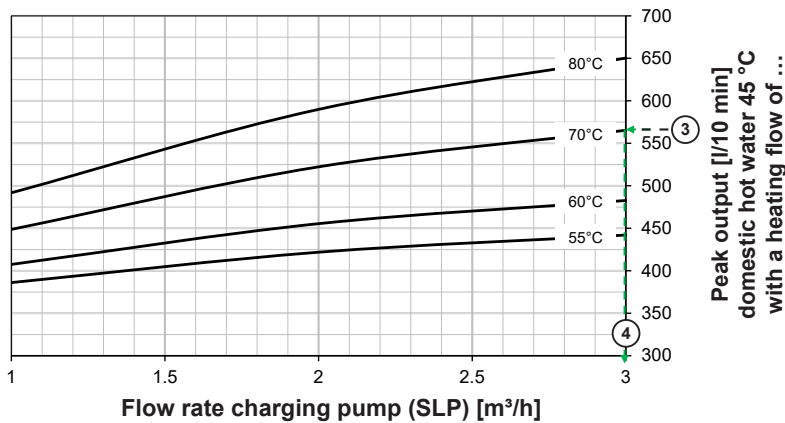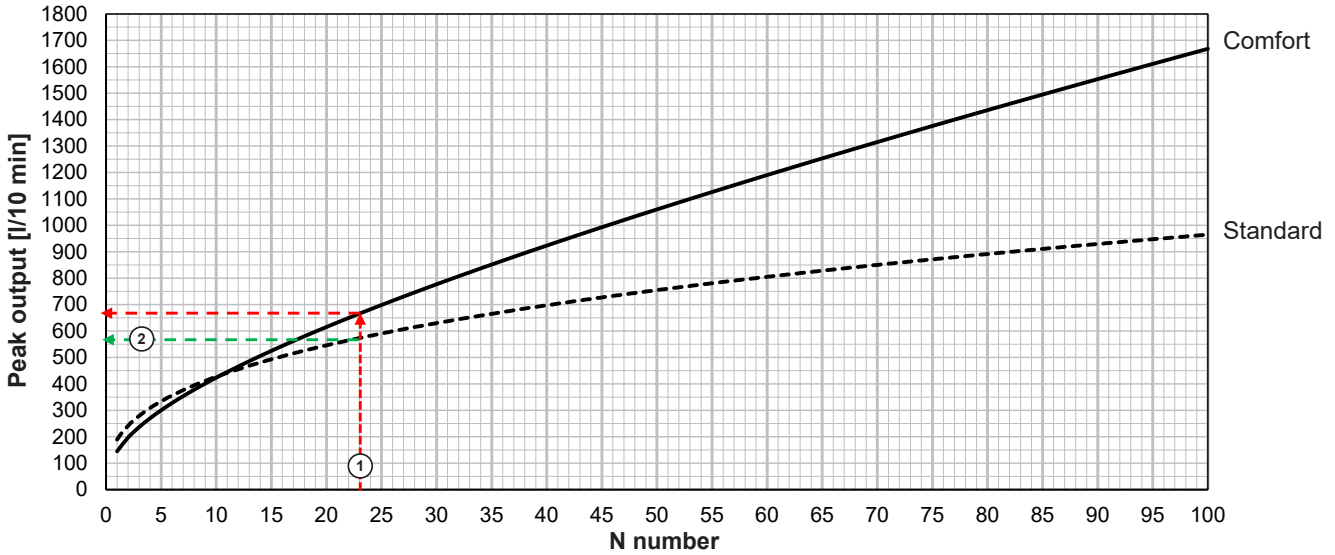

- ① Transfer performance figure NL 23 to curve sheet
- ② Read off peak output [l/10 min] from Comfort curve in the curve sheet
- ③ Transfer peak output [l/10 min] to the curve sheet up to intersection FL 70 °C
- ④ Read off flow rate charging pump (SLP) on curve sheet
- ⑤ Transfer flow rate charging pump to curve sheet intersection FL 70 °C
- ⑥ Read off heat output
- ⑦ Read off continuous output [l/h]

### Fundamental selection criteria

Enamelled calorifiers must not be used where the water is completely softened.

If the pH value is below the balance pH value, the water is aggressive to metals. If the pH value is more than 0.3 below the balance pH value, an enamelled calorifier should not be used.

The water must comply with the limit values specified in the current drinking water ordinance.

### Enamelled calorifiers

- If the **conductance**<sup>1)</sup> is < 200 µS/cm, enamelled calorifiers are no longer adequately protected by a magnesium protection anode. If the conductance is < 100 µS/cm, a Correx® impressed current anode also no longer offers adequate protection.
- If the **total hardness**<sup>2)</sup> is < 1 mmol/l, enamelled calorifiers are not adequately protected by a magnesium protection anode. If the total hardness is < 0.5 mmol/l, a Correx® impressed current anode also no longer offers adequate protection.
- Enamelled calorifiers must not be used where the water is completely softened. If the **residual hardness**<sup>3)</sup> is > 1 mmol/l or higher than 50 % of the total hardness of the crude water, a Correx® impressed current anode can help.
- If the **pH value**<sup>4)</sup> is more than 0.3 below the balance pH value, enamelled calorifiers should no longer be used. If the pH value is 0.1-0.3 below the balance pH value, a Correx® impressed current anode can help.
- Damage may result if the copper content is above 0.05 mg/l. The copper content must comply with the limit value specified in the current drinking water ordinance.

Limit values (in tabular form):

Type	Design	Corrosion protection	Conductance <sup>1</sup> µS/cm	Total hardness <sup>2</sup> mmol/l	Residual hardness <sup>3</sup> in proportion to total hardness of the tap water		pH value <sup>4</sup> below the balance pH value -
					mmol/l	%	
CombiVal ER (200-500)	S	1 Mg anode	> 200	> 1.0	> 1.0	> 50	< 0.3
	W	1 Correx® impressed current anode	> 100	> 0.5	> 1.0	> 50	0.1-0.3
CombiVal ER (800,1000)	S	2 Mg anodes	> 200	> 1.0	> 1.0	> 50	< 0.3
	W	1 Correx® impressed current anode	> 100	> 0.5	> 1.0	> 50	0.1-0.3
CombiVal ESR (200-400)	S	1 Mg anode	> 200	> 1.0	> 1.0	> 50	< 0.3
	W	1 Correx® impressed current anode	> 100	> 0.5	> 1.0	> 50	0.1-0.3
CombiVal ESSR (500)	S	1 Mg anode	> 200	> 1.0	> 1.0	> 50	< 0.3
	W	1 Correx® impressed current anode	> 100	> 0.5	> 1.0	> 50	0.1-0.3
CombiVal ESSR (800,1000)	S	2 Correx® impressed current anodes	> 100	> 0.5	> 1.0	> 50	0.1-0.3
MultiVal ERR (300-500)	S	1 Mg anode	> 200	> 1.0	> 1.0	> 50	< 0.3
	W	1 Correx® impressed current anode	> 100	> 0.5	> 1.0	> 50	0.1-0.3
MultiVal ESRR (500)	S	1 Mg anode	> 200	> 1.0	> 1.0	> 50	< 0.3
	W	1 Correx® impressed current anode	> 100	> 0.5	> 1.0	> 50	0.1-0.3
MultiVal ESRR (800,1000)	S	2 Correx® impressed current anodes	> 100	> 0.5	> 1.0	> 50	0.1-0.3
	W	1 Correx® impressed current anode	> 100	> 0.5	> 1.0	> 50	0.1-0.3
CombiVal E (300-1000)	S	1 Mg anode	> 200	> 1.0	> 1.0	> 50	< 0.3
	W	1 Correx® impressed current anode	> 100	> 0.5	> 1.0	> 50	0.1-0.3
CombiVal E (1500,2000)	S	2 Mg anodes	> 200	> 1.0	> 1.0	> 50	< 0.3
	W	1 Correx® impressed current anode	> 100	> 0.5	> 1.0	> 50	0.1-0.3
DuoVal E (100/300)	S	1 Mg anode	> 200	> 1.0	> 1.0	> 50	< 0.3
	W	1 Correx® impressed current anode	> 100	> 0.5	> 1.0	> 50	0.1-0.3
TopVal (130,160)	S	1 Mg anode	> 200	> 1.0	> 1.0	> 50	< 0.3

If the values are outside of the limit values, a stainless steel calorifier must be used.

W Customised design  
S Standard design

In every case, either a Correx® impressed current anode or one/two magnesium protection anodes are allowed to be used.

### Stainless steel calorifiers

- The storage tank must be properly earthed separately.
- Possible functional separating gap (e.g. insulating screw)
- If insulating screw fittings are used, do not connect the earth cable.
- The chloride content of the cold water must be below 40 mg/l.
- No material that can release chlorides (e.g. seals) must be used.
- The pH value must not fall below 4.0.
- Ferritic deposits must not get onto or into the stainless component (CrNi).
- Water softeners > 20 °fH are recommended, the hardness must not fall below 12 °fH.
- The storage tank must be maintained in line with the "water composition", according to the rules of technology and the protection anodes used must be checked/replaced.
- Cleaning must be carried out with suitable tools. Do not use steel tools for stainless steel calorifiers.
- The flange screws must be tightened to the correct torque.

### Limit values domestic water:

Type	Design	Corrosion protection	Max. chloride content mg/l
CombiVal CR (200-800)	S	-	< 40
	W	1 Correx® impressed current anode	< 200
CombiVal CR (1000)	S	-	< 40
	W	2 Correx® impressed current anodes	< 200
CombiVal CSR (300-800)	S	-	< 40
	W	1 Correx® impressed current anode	< 200
CombiVal CSR (1000-2000)	S	-	< 40
	W	2 Correx® impressed current anodes	< 200
CombiVal C (300-2500)	S	-	< 40
	W	1 Correx® impressed current anode	< 200
DuoVal C (100/300)	S	-	< 40
	W	1 Correx® impressed current anode	< 200

W Customised design (on site)  
S Standard design

### Limit value filling and replacement water heating:

According to our heat generator project engineering.

### Plate heat exchangers

Information about the quality of the plant water on the heating side and the tap water where plate heat exchangers are used.

Heat exchangers that do not contain non-ferrous metals should be used if corrosion problems affecting copper-soldered heat exchangers or copper pipes are known in the area of the drinking water supply where the plate heat exchangers will be used.

#### Heating water side:

The following applies:

- VDI 2035
- In addition, the EN 14868 standard must be applied, as well as the manufacturer-specific specifications

#### Domestic water side:

- All parts of the heat exchanger which come into contact with water are made of copper or stainless steel.
- To prevent deposits and abrasion, a filter < 100 µm must be installed upstream of the heat exchanger.
- The maximum temperature on the domestic water side is 60 °C, whereby the **total hardness**<sup>3)</sup> of the water must not exceed 14 °dH (2.5 mmol/l). If, for hygiene reasons, hot water temperatures of over 60 °C are required, measures must be implemented to prevent the formation of deposits (calcification). However, a hot water temperature of 70 °C must never be exceeded.
- The **pH value**<sup>2)</sup> of the domestic water must be between 7 and 9.
- Due to the risk of corrosion, the **sum of the chloride, nitrate and sulphate content**<sup>1)</sup> of the domestic water must not exceed a total of 100/300 mg/l. The **maximum free chloride concentration**<sup>4)</sup> is 0.5 mg/l.
- Due to the risk of deposits forming, the **mineral content**<sup>5)</sup> of the tap water must not exceed 250 mg/l. The maximum **conductance**<sup>6)</sup> is 500/1000 µS/cm.
- **Softened water**<sup>7)</sup> must be blended with at least 50 % tap water to ensure that the ratio of [Ca<sup>2+</sup> und Mg<sup>2+</sup>] to [HCO<sub>3</sub><sup>-</sup>] is over 0.5.
- If the sulphate [SO<sub>4</sub><sup>2-</sup>] content exceeds the carbonate [HCO<sub>3</sub><sup>-</sup>] content, copper-soldered heat exchangers must not be used.

#### Limit values (in tabular form)

		Cu-soldered		Without non-ferrous metals
		Plate heat exchanger heating water side	Plate heat exchanger domestic water side	Plate heat exchanger domestic water side
<b>Conductance</b> <sup>6)</sup> of the tap water	µS/cm	-	< 500	< 1000
<b>Residual hardness</b> <sup>7)</sup>	mmol/l	-	> 0.5	-
in relation to the total hardness of the tap water	%	-	> 50	-
<b>pH value</b> <sup>2)</sup>	-	8.2-10	7-9	6-10
<b>Max. free chloride concentration</b> <sup>4)</sup>	mg/l	-	< 0.5	< 0.5
<b>Chloride</b>	mg/l	< 30	< 50	< 100
<b>Nitrate</b>	mg/l	< 50	< 100	< 300
<b>Sulphate</b>	mg/l	< 30	< 100	< 300
<b>Sum of chloride, nitrate and sulphate content</b> <sup>1)</sup>	mg/l	< 50	< 100	< 300
<b>Mineral content</b> <sup>5)</sup> of the tap water	mg/l	-	< 250	< 250
<b>Total hardness</b> <sup>3)</sup>	°dH	-	< 14	< 15
	mmol/l	-	< 2.5	< 2.6

### Electric heating elements

The electric heating elements are equipped with a temperature controller and a safety temperature limiter.

#### Safety temperature limiter

Switch-off temperature 98 °C – 6 K.

If the sanitary system cannot withstand these temperatures, a thermostatic water mixer must be built in.

**Hoval quality.**  
You can count on us.

Hoval is one of the leading international companies for heating and indoor climate solutions. Drawing on more than 80 years of experience and benefiting from a close-knit team culture, the Hoval Group delivers exciting solutions and develops technically superior products. This leadership role requires a sense of responsibility for energy and the environment, which is expressed in an intelligent combination of different heating technologies and customised indoor climate solutions.

Hoval also provides personal consultations and comprehensive customer service. With around 2500 employees in 15 companies around the world, Hoval sees itself not as a conglomerate, but as a large family that thinks and acts globally.

Hoval heating and indoor climate solutions are currently exported to more than 50 countries.

## Responsibility for energy and environment

Your Hoval partner

### Liechtenstein

Hoval Aktiengesellschaft  
9490 Vaduz  
+423 399 24 00  
hoval.com

### United Kingdom

Hoval Ltd.  
Newark Notts. NG 24 1JN  
+44 1636 672 711  
hoval.co.uk